


# R75LN3560AA00K

## Aliases (75LN3560AA00K)

R75L, Film, Metallized Polypropylene, General Purpose, 0.56 uF, 10%, 560 VDC, 85°C, Lead Spacing = 22.5mm

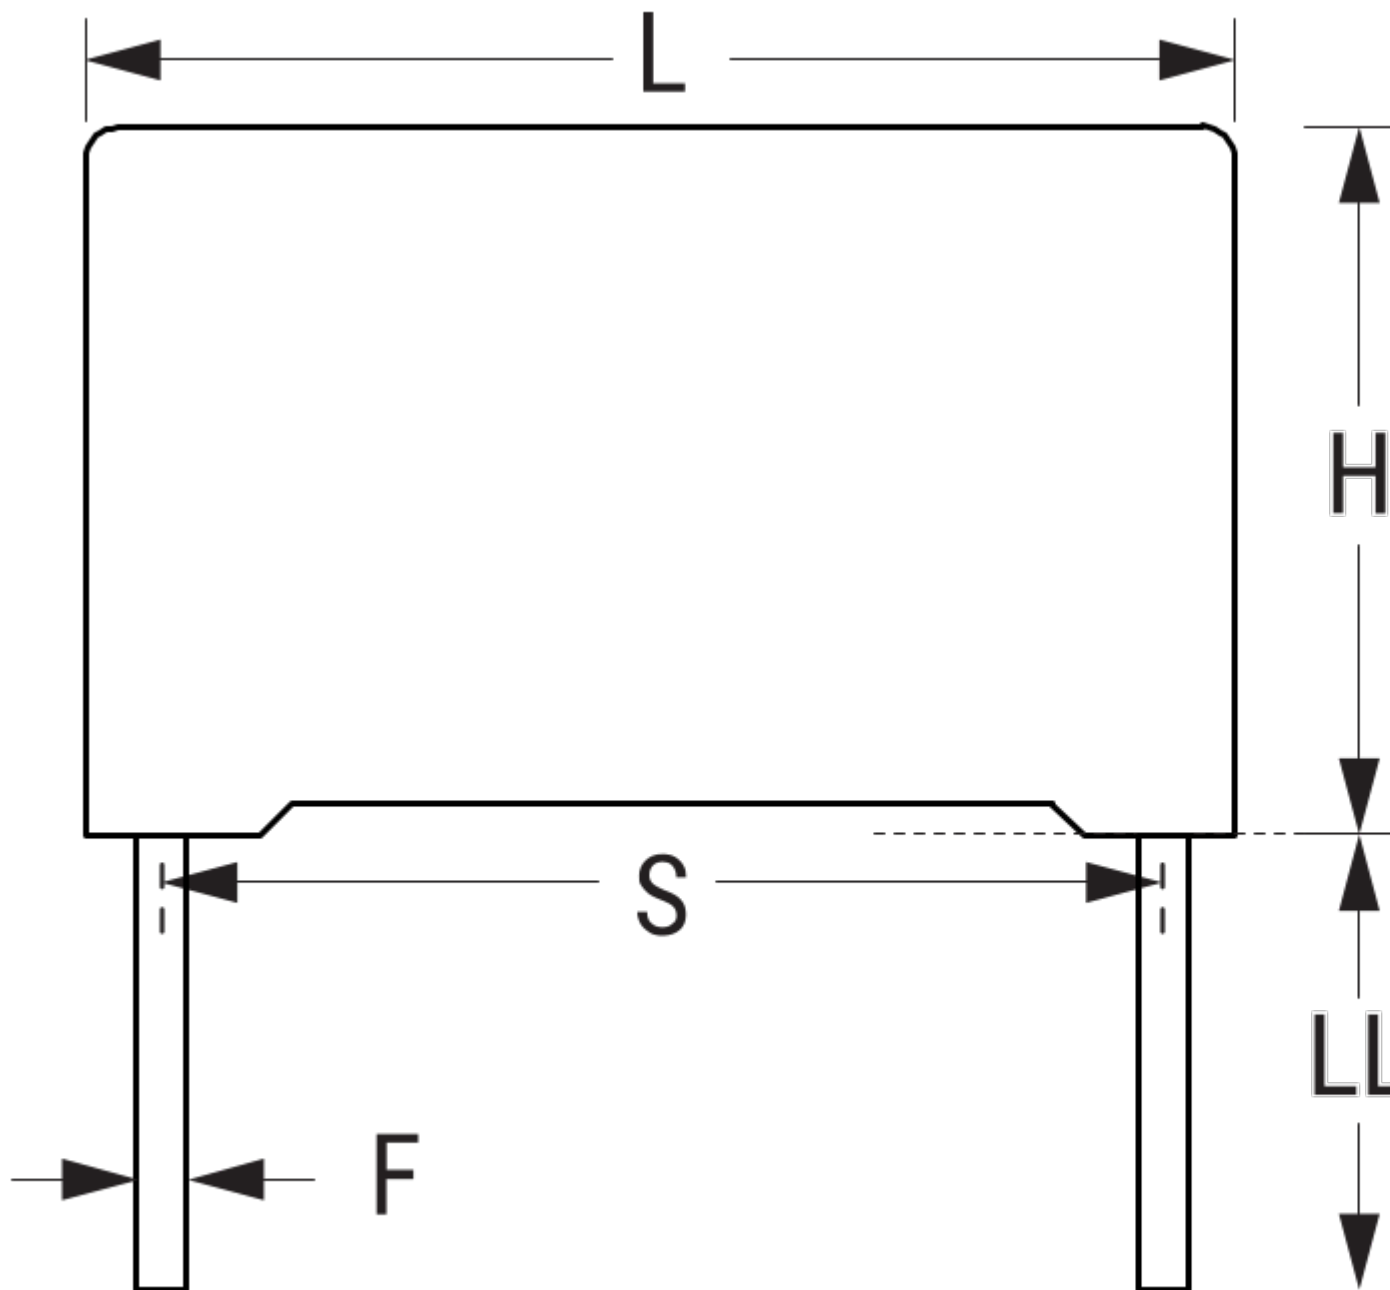

Click [here](#) for the 3D model.

### Dimensions

L 26.5mm +0.3mm

H 18.5mm +0.1mm

### Dimensions

T 10mm +0.2mm  
S 22.5mm +/-0.4mm  
LL 4mm +2mm  
F 0.8mm +/-0.05mm

### Packaging Specifications

Packaging Bulk, Bag  
Packaging Quantity 396

### General Information

Series R75L  
Dielectric Metallized Polypropylene  
Style Radial  
Features Pulse, Capacitive Power Supply  
RoHS Yes  
Lead Cut  
AEC-Q200 No  
Component Weight 6.384 g

### Specifications

Capacitance 0.56 uF  
Capacitance Tolerance 10%  
Voltage AC 250 VAC  
Voltage DC 560 VDC, 336 VDC (105C)  
Temperature Range -55/+105°C  
Rated Temperature 85°C  
Dissipation Factor 0.05% 1kHz, 0.08% 10kHz  
Insulation Resistance 53.5714 GOhms  
Max dV/dt 250 V/us  
Inductance 18 nH

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

Generated 5/18/2023 - 0593972b-486e-4b65-bdbf-44f883b7d82d

© 2006 - 2023 KEMET

Generated 5/18/2023 - 0593972b-486e-4b65-bdbf-44f883b7d82d

© 2006 - 2023 KEMET