# 

### M12 Connector

TE Internal #: T4171010404-001 Standard Circular Connectors, Wire-to-Panel, 4 Position, Sealable, Wire & Cable, Signal, Reverse Gender, Nickel, Brass, M12 Connector

#### View on TE.com >

Connectors > Circular Connectors > Standard Circular Connectors > M12 Panel Mount Wire



Connector System: Wire-to-Panel Number of Positions: 4

Sealable: Yes

Connector & Contact Terminates To: Wire & Cable

Contact Current Rating (Max): 4A

### All M12 Panel Mount Wire (66)



## Features

## **Product Type Features**

| Prewired                              | Yes                  |
|---------------------------------------|----------------------|
| Product Type                          | Connector Assembly   |
| Accessory Color                       | Black                |
| Assembly Type                         | Electrical Connector |
| Connector System                      | Wire-to-Panel        |
| Sealable                              | Yes                  |
| Connector & Contact Terminates To     | Wire & Cable         |
| Circular Connector Type               | Plug                 |
| Shell Type                            | Metal                |
| Configuration Features                |                      |
| Keying & Polarized Position Locations | В                    |
| Factory Installed Backshell           | No                   |
| Keying                                | В                    |

**C** For support call+1 800 522 6752

Standard Circular Connectors, Wire-to-Panel, 4 Position, Sealable, Wire & Cable, Signal, Reverse Gender, Nickel, Brass, M12 Connector



| Number of Positions                         | 4         |
|---|-----------|
| Number of Power Positions                   | 0         |
| Number of Signal Positions                  | 4         |
| Contacts Preloaded                          | Yes       |
| Electrical Characteristics                  |           |
| Operating Voltage                           | 250 VAC   |
| Body Features                               |           |
| Peripheral Seal Material                    | Silicone  |
| O-Ring Material                             | Silicone  |
| Environmental Protection Type               | Sealed    |
| Shell Plating Material                      | Nickel    |
| Shell Base Material                         | Brass     |
| Circular Connector Insulation Material Type | Polyamide |
| Contact Features                            |           |
| Contact Current Rating (Max)                | 4 A       |
| Reverse Gender                              | Yes       |
| Circular Connector Contact Type             | Pin       |

## Mechanical Attachment

| Polarization Code             | В                         |
|-------------------------------|---------------------------|
| Mating Alignment Type         | Keyed                     |
| Housing Features              |                           |
| Circular Connector Shell Size | 18                        |
| Dimensions                    |                           |
| Wire Size                     | .34 – .5 mm²              |
| Usage Conditions              |                           |
| IP Water Sealing Level        | IP67                      |
| Operating Temperature Range   | -40 – 85 °C[-40 – 185 °F] |
| Operation/Application         |                           |
| Circuit Application           | Signal                    |
| Shielded                      | No                        |
| Industry Standards            |                           |
|                               |                           |

Standard Circular Connectors, Wire-to-Panel, 4 Position, Sealable, Wire & Cable, Signal, Reverse Gender, Nickel, Brass, M12 Connector



| UL Flammability Rating  | UL 94HB   |
|---|---|
| Packaging Features  |   |
| Packaging Quantity  | 1   |
| Other   |   |
| Field Serviceable   | No  |
|   |   |
| Product Compliance  |   |
| For compliance documentation, visit the product page on TE.com> |   |
| EU RoHS Directive 2011/65/EU                                    | Compliant with Exemptions   |
| EU ELV Directive 2000/53/EC                                     | Compliant with Exemptions   |
| China RoHS 2 Directive MIIT Order No 32, 2016                   | Restricted Materials Above Threshold  |
| EU REACH Regulation (EC) No. 1907/2006                          | Current ECHA Candidate List: JAN 2023<br>(233)<br>Candidate List Declared Against: JAN 2023<br>(233)<br>SVHC > Threshold:<br>Pb (1.9% in Component Part)  |
|   | Article Safe Usage Statements:<br>Do not eat, drink or smoke when using this product. Wash thoroughly after<br>handling. Recycle if possible and dispose of the article by following all applicable<br>governmental regulations relevant to your geographic location. |
|   |   |

Halogen Content

Not Low Halogen - contains Br or Cl > 900

#### ppm.

### Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


## **Compatible Parts**

Standard Circular Connectors, Wire-to-Panel, 4 Position, Sealable, Wire & Cable, Signal, Reverse Gender, Nickel, Brass, M12 Connector





# Also in the Series | M12 Connector

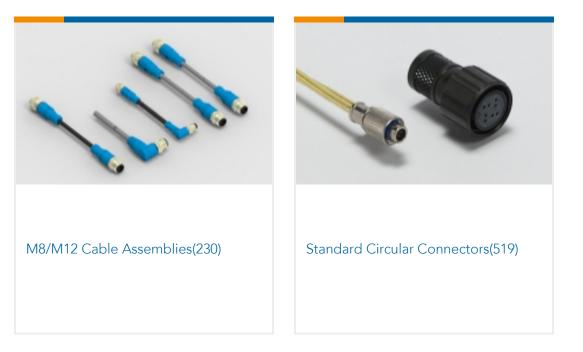

# Customers Also Bought



## Documents

## Product Drawings M12,REAR MOUNTING,MALE,B,4P,0.2M WIRE

English

### **CAD** Files

Customer View Model

ENG\_CVM\_CVM\_T4171010404-001\_B.3d\_igs.zip

Standard Circular Connectors, Wire-to-Panel, 4 Position, Sealable, Wire & Cable, Signal, Reverse Gender, Nickel, Brass, M12 Connector



English

Customer View Model ENG\_CVM\_CVM\_T4171010404-001\_B.3d\_stp.zip

English

Customer View Model

ENG\_CVM\_CVM\_T4171010404-001\_B.2d\_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages M8 / M12 Connector System Catalog

English

Product Specifications Application Specification

English

Product Environmental Compliance

**Product Compliance** 

English

**Product Compliance** 

English