



A	$\square$

ISSUE NUMBER	
ORIGINAL	(1)

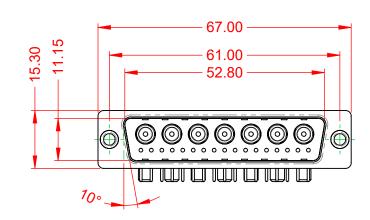




## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED



POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX. INSULATOR RESISTANCE: 5000MΩ min.

.X ±0.25 .XX ±0.13 .XXX ±0.05


DIELECTRIC WITHSTANDING VOLTAGE:

**OPERATING TEMPERATURE:** 

40A (CURRENT)

-55°C ~ 125°C

1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
S TO	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
TIVES ANCY.		SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-24W7650-4T1		ISSUE
			PART NUMBER: 629-24W	7650-4T1	1



THIS SERIES FULLY CONFORMS THE EUROPEAN UNION DIRECTI 2011/65/EU FOR RoHS COMPLIAN

