

TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13

> 10.70 5.80

THIS IS A C.A.D. GENERATED DRAWING

DO NOT MAKE MANUAL REVISIONS TO MASTER.

11.94 0 ۲

NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ GOLD PLATED

OPERATING TEMPERATURE:

40A (CURRENT) POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT

INSULATOR RESISTANCE: DIELECTRIC


WITHSTANDING VOLTAGE:

-55°C ~ 125°C


SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.

5000MΩ min.

1000V AC rms




COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
		DRAWN: C.B	DATE: JAN. 01/20	19
			DATE:	
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
TORONTO, ONTARIO CANADA		DRAWING NUMBER: 630-43W2650-4ND		ISSUE
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-43W2	2650-4ND	1

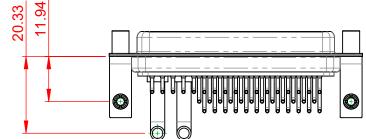



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.





ISSUE NUMBER

(1)

ORIGINAL

