THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

ITEM	CONNECTOR PART NO.	DESCRIPTION
1	See Table 1	XAF CONNECTOR
2	UL10002, 22 AWG	BLACK

IPI CHECK	EOR CHECK

Applicable Tooling

BCD

TABLE 1

ITEM	NUMBER OF CIRCUITS	CONNECTOR PART NO.	ASSEMBLY PART NUMBER	TOTAL WIRE REQUIRED
1	2	02XAF-2S	A02XAF02XAF22K305A	609.6
1	3	03XAF-2S	A03XAF03XAF22K305A	914.4
1	4	04XAF-2S	A04XAF04XAF22K305A	1,219.2
1	5	05XAF-2S	A05XAF05XAF22K305A	1,524.0
1	6	06XAF-2S	A06XAF06XAF22K305A	1,828.8
1	8	08XAF-2S	A08XAF08XAF22K305A	2,438.4
1	10	10XAF-2S	A10XAF10XAF22K305A	3,048.0
1	20	20XAF-2S	A20XAF20XAF22K305A	6,096.0

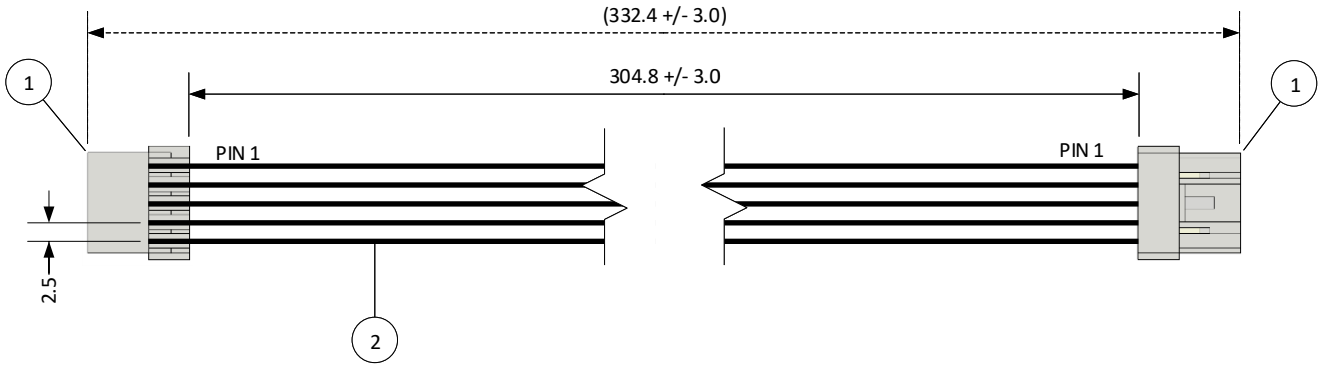

Electrical Specifications
Current: 3.0A AC/DC
Voltage: 150V AC/DC

SCALE	CUSTOMER NAME	CUSTOMER PART NO.
1: 1		
DIMENSIONS: All dimensions are in MM with a tolerance of +/- 3.0 unless otherwise specified.	DESCRIPTION: 2.5 mm Pitch XAF Standard Catalog Assembly - 12" Overall Length – Pin out: 1 to 1	
DRAWN BY: STEVEN PILKINGTON	ASSEMBLY PART NO.: SEE TABLE 1	
CHECKED BY: JUSTIN BAKER	DRAWING NO. & REVISION: GAM-039	REVISED: 3/7/2016

REV.	DESCRIPTION	DATE	BY
1	Add electrical specifications	6/27/2018	SP