


THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.

Å	
<u> </u>	

ISSUE NUMBER

(1)

ORIGINAL




.X ±0.25 .XX ±0.13

.XXX ±0.05

NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ GOLD PLATED

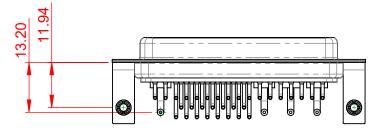

OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	10A (CURRENT)
SIGNAL CONTACT CURRENT RATING:	
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:



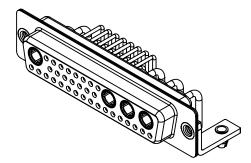

		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
	-		DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
TORONTO, ONT CANADA	EDAC INC	OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
	TORONTO, ONTARIO CANADA		DRAWING NUMBER: 630-36W4640-1N3		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-36W	4640-1N3	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

5000MΩ min.

1000V AC rms

