


### Electrical Specifications

Parameters		Specification	Unit
Center Frequency (Fo)		2140.000	MHz
Insertion Loss, typ/max	2110 ~ 2170MHz	1.6 / 1.9	dB
Amplitude Ripple, typ/max	2110 ~ 2170MHz	0.5 / 1.0	dB
VSWR, typ/max	Input	2110 ~ 2170MHz	1.6 / 2.0
	Output	2110 ~ 2170MHz	1.6 / 2.0
Attenuation, min/typ	10 ~ 1920 MHz	-30 / -38	dB
	DC ~ 400 MHz	-40 / -45	dB
	699 ~ 925MHz	-37 / -40	dB
	1710 ~ 1920 MHz	-30 / -38	dB
	1920 ~ 1980 MHz	-35 / -43	dB
	2300 ~ 2400 MHz	-30 / -40	dB
	2400 ~ 2500 MHz	-30 / -38	dB
	4030 ~ 4340 MHz	-30 / -35	dB
4900 ~ 5950 MHz	-25 / -30	dB	
DC Voltage		5	V
In/Output Impedance		50	Ω
Input Power, max, CW 5000h, 50°C		15	dBm
ESD Voltage ESD (MM)		50	VDC
Sensitive Discharge Device ESD(HBM)		175	
Operating Temperature Range		-30 to +85	°C
Storage Temperature Range		-40 to +85	°C



### Dimensions

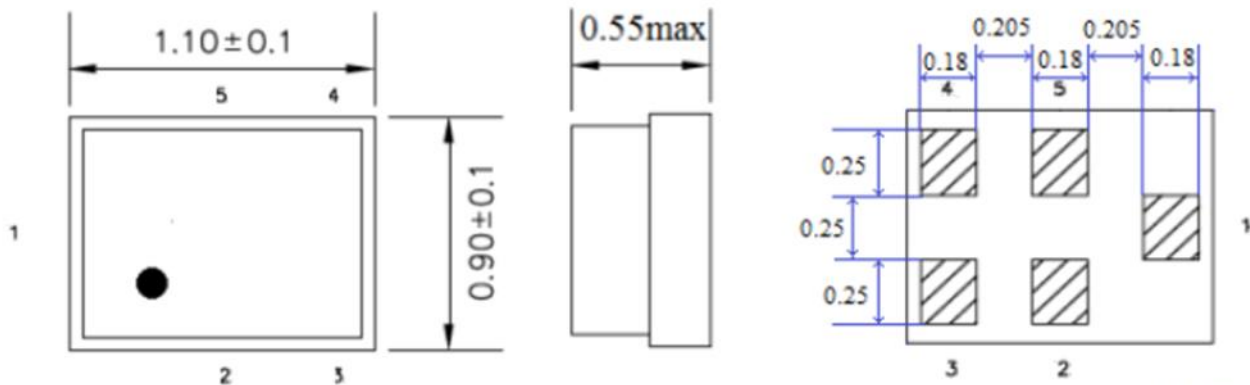


PIN #	PIN NAME	DESCRIPTION
1	IN	Input
4	OUT	Output
2, 3, 5	GND	Ground

Unit: mm

### Frequency Characteristics

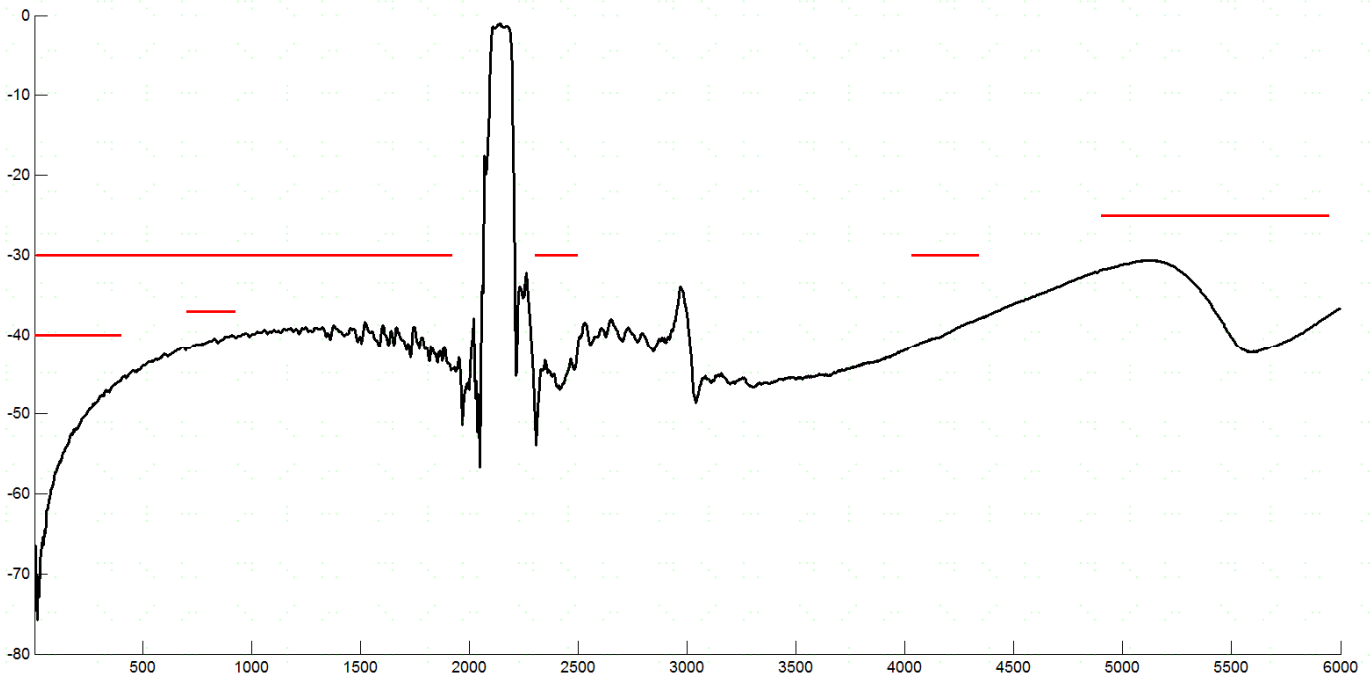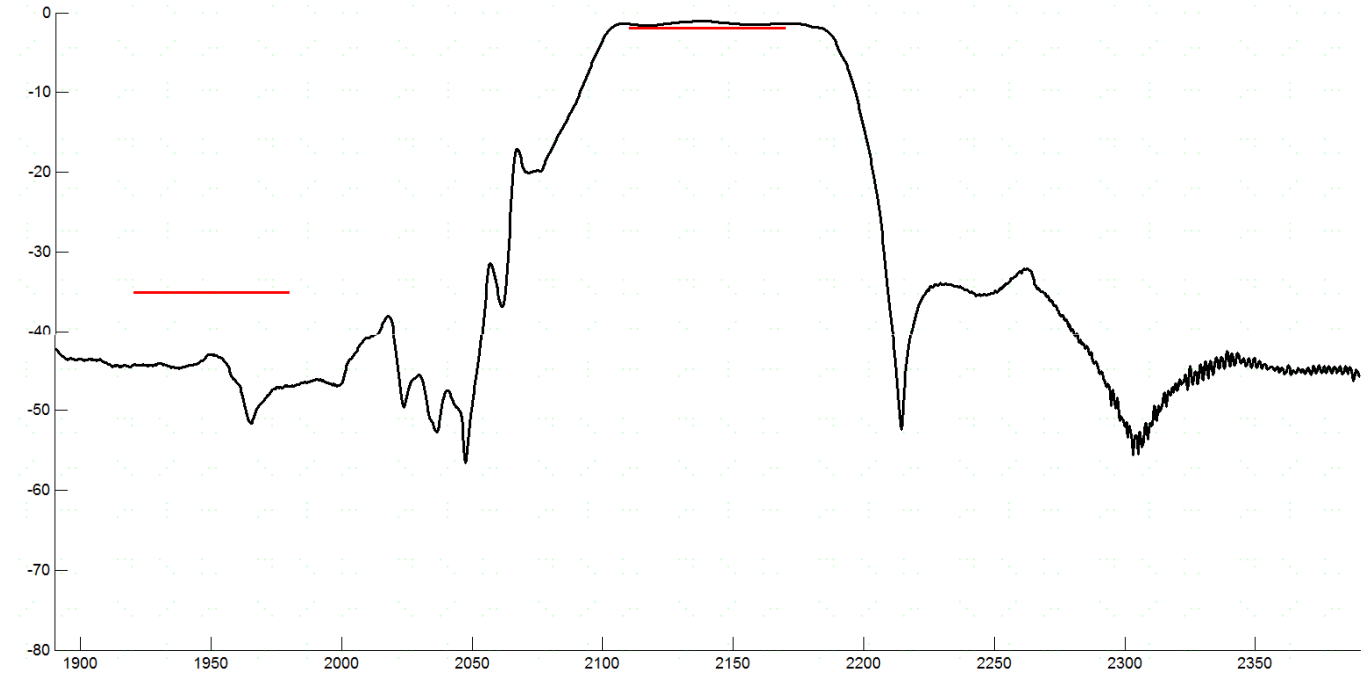

### Test Circuit

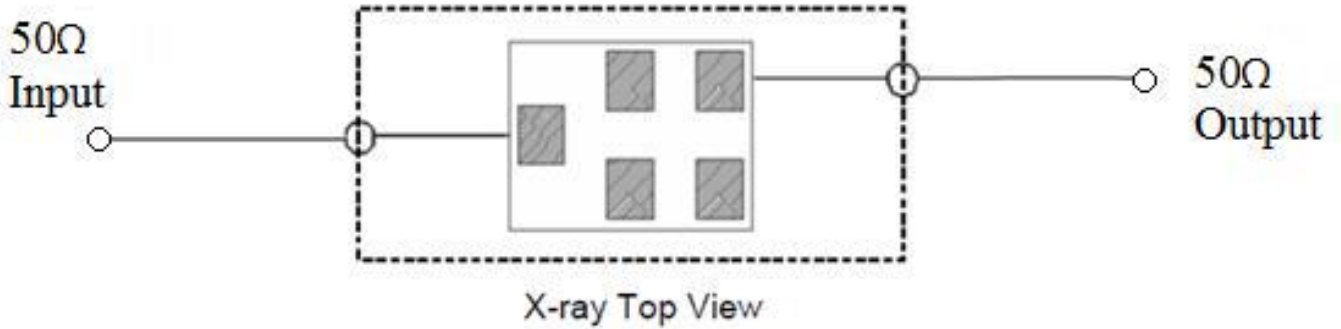


### Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	2
REACH – SVHC	Compliant
RoHS	Compliant



### Tape Dimension

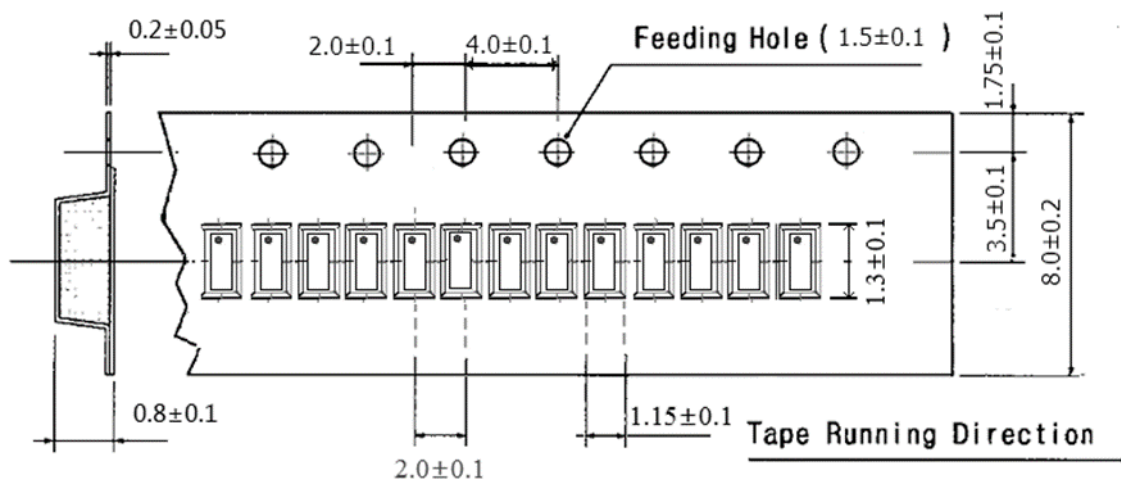

### APPROVAL

DRAWN BY	ZZ, August 12, 2021
APPROVED BY	AR, August 12, 2021
REVISION	A, Initial Release

Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.