


COIL: @ +25 °C	
RESISTANCE	700 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	1.5 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

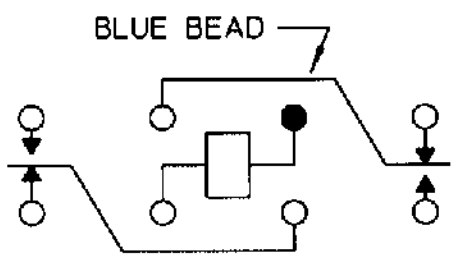

CONTACT RATING: LOW LEVEL TO 5 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS MIN.

DR. R.B. 1/14/98 CK. V14/98



CUST. C. I. I. STD.
CUST. NO.

TYPE HFW5A RELAY

HFW5A1108K00