



.XXX ±0.05

_	1
	ORIGINA



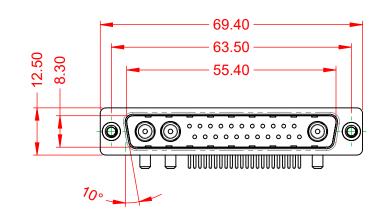




## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/CO-AX CONTACT RATING:	20A (CURRENT
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	<b>5A PER CONTA</b>
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.
DIELECTRIC	


WITHSTANDING VOLTAGE:

**OPERATING TEMPERATURE:** 

-55°C ~ 125°C

ACT

1000V AC rms



			SW REFERENCE NO.: 629 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:		
		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-25W	3240-2TA	ISSUE	
	YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 629-25W	3240-2TA	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

