




Data sheet | Item number: 756-5311/040-050

Sensor/Actuator cable; M12A plug; straight; 4-pole; Length: 5 m

www.wago.com/756-5311/040-050



i Picture differs from the item.

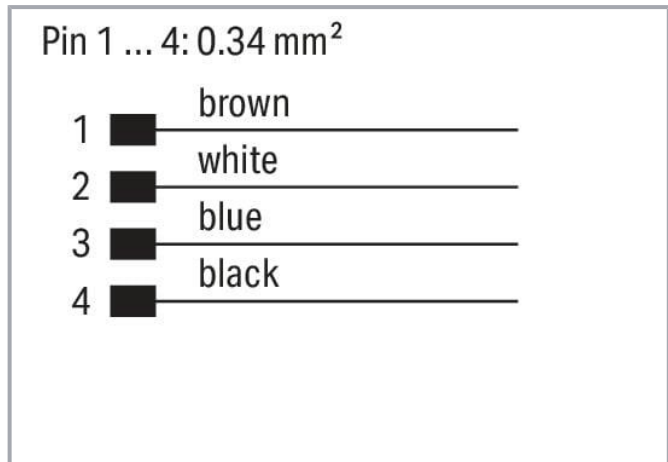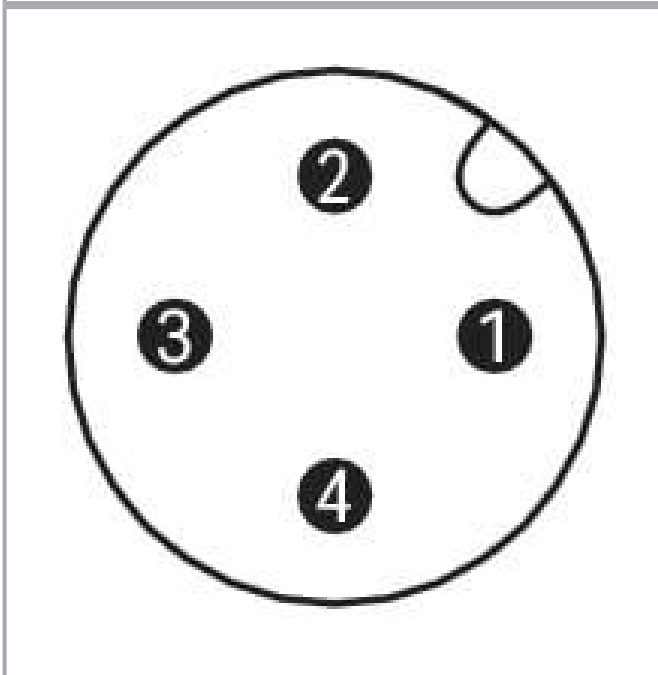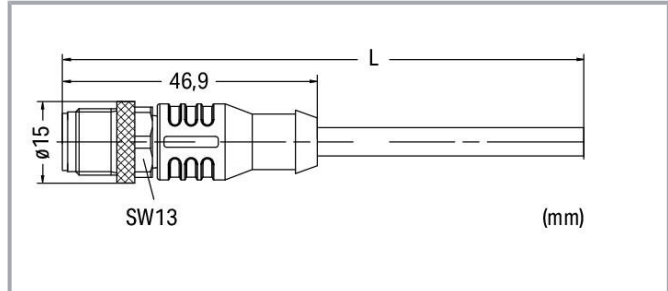

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Data

Technical data

General

Operating voltage	250 VAC/DC
Operating current	4 A
Rated surge voltage	2.5 kV
Contact resistance	10 mΩ
Conductor resistance	≤ 60 Ω/km
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

Suitable for drag chains

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

Cable

Cable length	5 m
Type code	LiF9YH-11YH or LiF9YC11YFHF

Subject to changes. Please also observe the further product documentation!



Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	4.5 ... 4.9 mm

Connector

Connection type	M12 plug - free end
Cable connection direction to mating direction	0°
Connector interface coding (cable/adapter) 1 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	1 Nm

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	HU
GTIN	4045454942106
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	e968aad3-0531-4d87-ba4d-98abb0007ba0
SCIP notification number (Belgium)	929a3eda-fec3-4ebc-b954-216bc37cbf21
SCIP notification number (Bulgaria)	d6a5fe52-8cf9-4ae7-802a-a98a05a70f24
SCIP notification number (Czech Republic)	5dbe8fd3-223a-4af4-9456-f9d13db54211
SCIP notification number (Denmark)	9bc01d87-b5bf-4c67-9ba7-738d58ab31f7
SCIP notification number (Finland)	81331658-f984-4c7f-90e3-97860fec1003

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com


Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



SCIP notification number (France)	23f188d0-fee6-4bb1-ad67-8c243f2c1f51
SCIP notification number (Germany)	a7ff9c5c-77b4-412b-971a-a2fa1e6444e5
SCIP notification number (Hungary)	347f4336-0d07-4dfc-9d7b-b09357ce3079
SCIP notification number (Italy)	4c1b6b30-c9c9-447a-8d4a-7b21cd00f2bb
SCIP notification number (Netherlands)	7ae08416-7413-41d3-8584-0ebd609e5dba
SCIP notification number (Poland)	131c9ac5-8b67-4c86-a83b-dfb58addd2da
SCIP notification number (Romania)	efe8966c-660c-4c6f-882d-7f3093790924
SCIP notification number (Sweden)	0bc7d620-f1a3-47f3-a354-e29b563b33e6

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 2238	E519602

Downloads

Documentation

Bid Text

756-5311/040-050 X81 - Datei	2019 Feb 19	xml 3.3 kB	Download
756-5311/040-050 doc - Datei	2017 Sep 20	doc 26.6 kB	Download

System Description

IP67 Cables and Pluggable Connectors	pdf 161.6 kB	Download
--------------------------------------	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 756-5311/040-050	URL	Download
WSCAD Universe 756-5311/040-050	URL	Download

Subject to changes. Please also observe the further product documentation!



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5311/040-050

URL

Download

Sensor/Actuator cable; M12A plug; straight; 4-pole; Length: 5 m

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.