


**NOTES:**

1. PART IS TO BE ROHS COMPLIANT.
2. REFERENCE MOLEX PRODUCT SPECIFICATION RPS-13331-001.
3. BATTERIES ARE PACKED 5 PCS PER SEALED BAG. REFERENCE MOLEX PACKAGING SPECIFICATION 133310001.
4. MAXIMUM THICKNESS OF BATTERY IS 0.028" (0.7MM).
5. GRAPHIC IMAGE IS FOR REFERENCE ONLY.
6. ANODE CONTACT PAD IS A ZINC-CARBON BLEND INK.
7. CATHODE CONTACT PAD IS A CARBON INK.

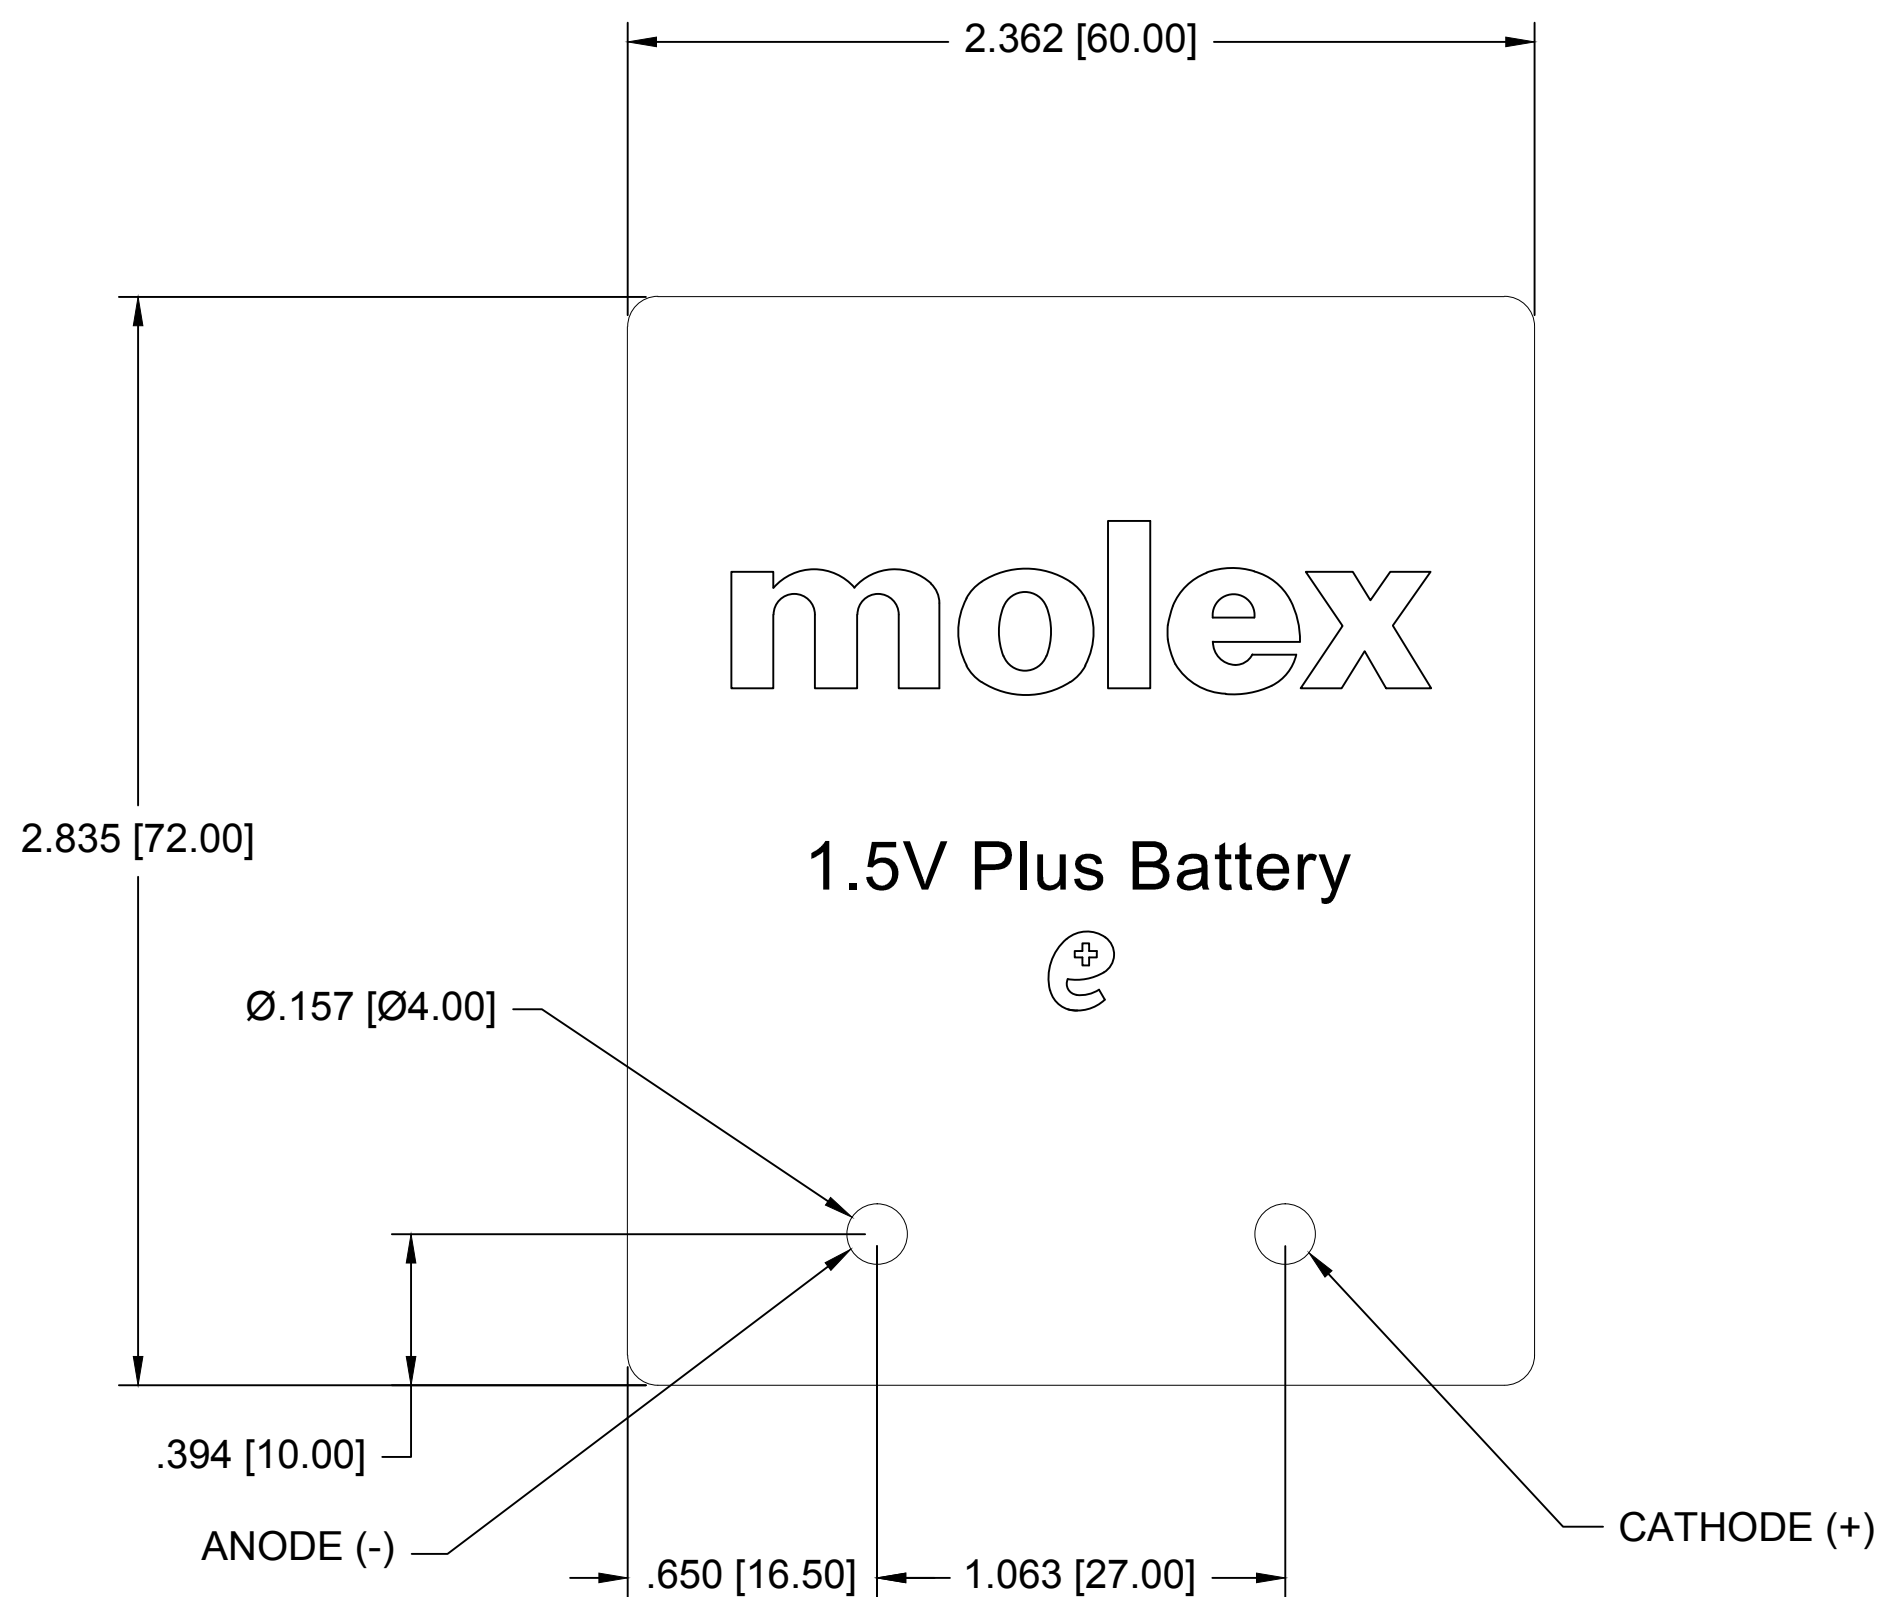

PRE-PRODUCTION RELEASE 1	EC NO: USW2018-0071 DRWN: RICK S. 2018/03/22	DESCRIPTION REV	QUALITY SYMBOL ▽=0 ∇=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH/MM		SCALE ---	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
				mm 4 PLACES ±--- 3 PLACES ±--- 2 PLACES ±0.5 1 PLACE ±---	INCH ±--- ±.020 ±--- ±---	DRAWN BY RICK S.	DATE 2108/03/23	TITLE 1.5V PRIMARY CELL PRINTED BATTERY			
				ANGULAR ±1/2°		CHECKED BY ----	DATE ----	MOLEX INCORPORATED			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY DRASMUSS	DATE 2010/05/07	MATERIAL NO. 133310001	DOCUMENT NO. SD-13331-001	SHEET NO. 1 OF 1		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION