
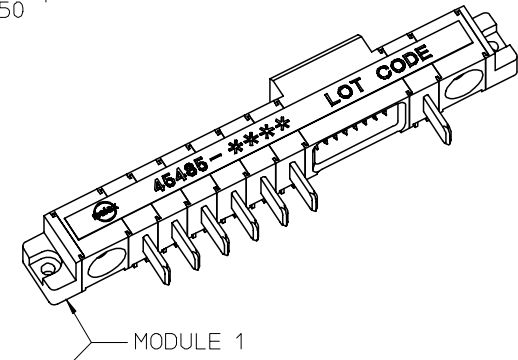
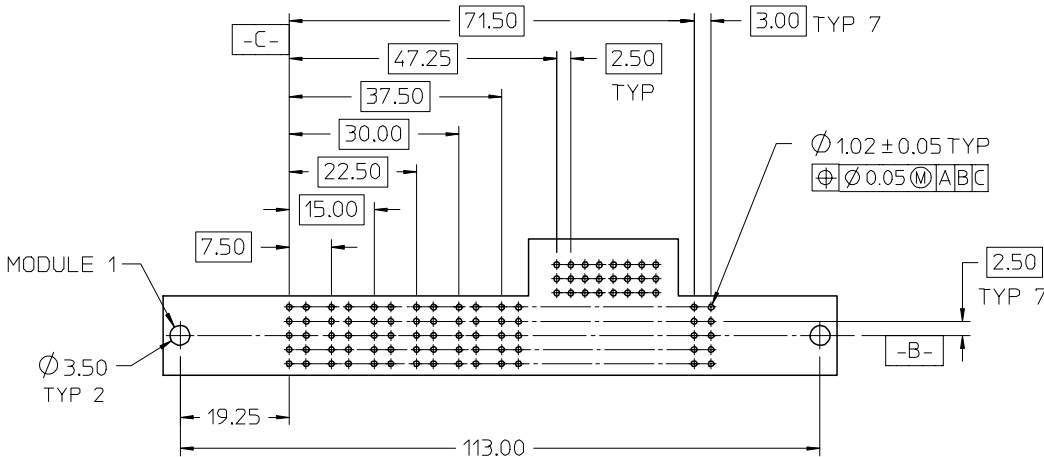
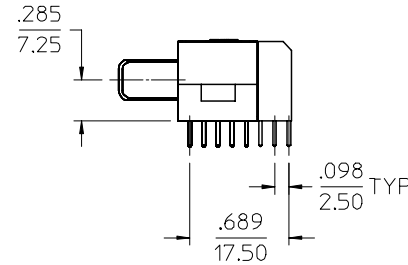
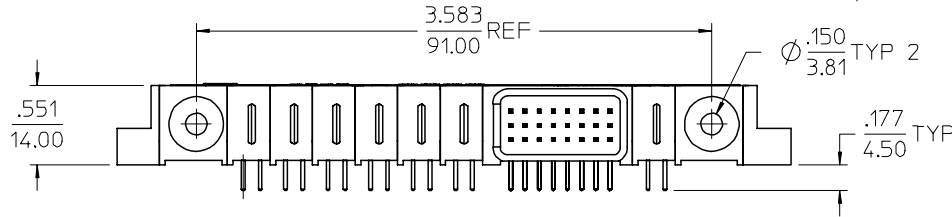


NOTES:

1. MATERIAL: LCP, GLASS FILLED, UL94V-0, BLACK.  
CONTACTS: COPPER ALLOY
2. FINISH: SELECT GOLD: 30 MI MIN.  
SELECT TIN: 100 MI MIN.  
BOTH OVER NICKEL
3. PRODUCT SPECIFICATION: PS-45424-001.
4. PACKAGING SPECIFICATION: PK-45485-001.

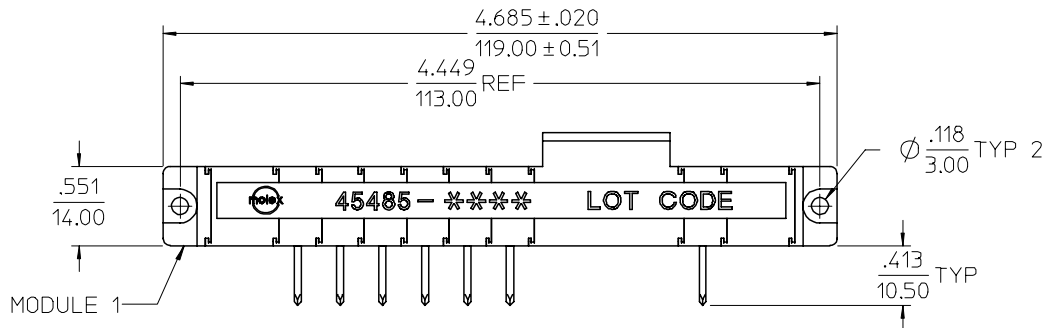

PCB LAYOUT: COMPONENT SIDE  
PCB THICKNESS: .125/3.18  
PCB TOLERANCE: ±.002/0.05

GEOM TOL PCB  
EC NO: UCP2005-2625  
DRWN: ADRATND2005/07/07  
CHKD: KSAMEC 2005/07/08  
APPR: APATEL 2005/07/13  
A1

QUALITY SYMBOLS  
DESCRIPTION  
REV

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .015
1 PLACE	± 0.38	± ---
ANGULAR ±1/2°		
DRAFT WHERE APPLICABLE		
MUST REMAIN WITHIN DIMENSIONS		

SCALE  
1:1.33

DESIGN UNITS  
METRIC

DIMENSION STYLE	
IN/MM	
DRAWN BY	DATE
SAMIEC	2003/11/11
CHECKED BY	DATE
MARGULIS	2003/11/11
APPROVED BY	DATE
MARGULIS	2003/11/11

PD 500	PD 506	PD 105	PD 105	PD 105	PD 105	PD 105	PD 105	PD 302	PD 105	PD 506	PD 501
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------

THIRD ANGLE PROJECTION  
REVISE ON CAD ONLY

TITLE  
POWER DOCK ASSEMBLY  
POWER  
RIGHT ANGLE SOLDER TAIL

molex MOLEX INCORPORATED

MATERIAL NO.	DOCUMENT NO.	SHEET NO.
45485-0052	SD-45485-052	1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION