



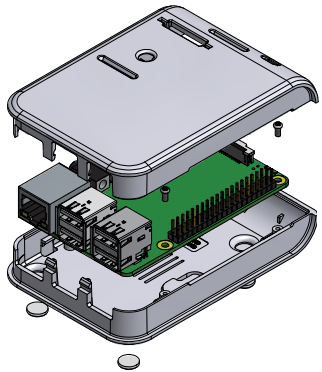



INSTALLING THE RASPBERRY PI INTO THE 1593HAMPI ENCLOSURE





STEP 1

TAKE THE BOTTOM PART OF THE ENCLOSURE AND INSERT THE DEVELOPMENT BOARD ON AN ANGLE AGAINST THE STATIONARY CLIPS.

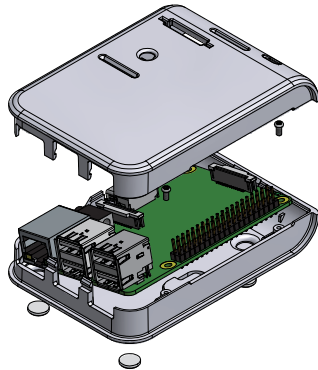


STEP 2

PUSH DOWN FIRMLY ON THE GPIO PINS UNTIL YOU HEAR THE BOARD CLICK IN PLACE.





OPTIONAL
USE SCREWS FOR ADDED BOARD SECURITY.



STEP 3

TAKE THE TOP PART OF THE ENCLOSURE AND TOUCH THE TWO CLIPS ON THE USB SIDE TOGETHER ON AN ANGLE.



STEP 4

PUSH DOWN ON THE OUTER TOP EDGE OF THE ENCLOSURE UNTIL YOU HEAR A CLICKING SOUND.

PLACE RUBBER ADHESIVE FEET IN THE CIRCLES ON THE BOTTOM OF THE ENCLOSURE.



TO DISASSEMBLE PLACE YOUR TWO FINGERS ON THE BOTTOM CLIPS (UNDER USB), PLACE YOUR THUMB ON THE LINE JUST ABOVE THE MICRO SD AND SQUEEZE

