





ISSUE NUMBER	
ORIGINAL	1

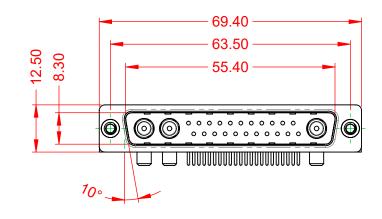



NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED

## 10.67 O 13.20

OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	40A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	$5000M\Omega$ min.

.XX ±0.13 .XXX ±0.05

WITHSTANDING VOLTAGE: 1000V AC rms



				SW REFERENCE NO.: 629 COMBO ASSEMBLY				
	COMBINATION D-SUB		DRAWN: C.B		DATE: JAN. 01/2019		19	
			CHECKED:		DATE:			
	EDAC INC TORONTO, ONTARIO CANADA	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE	SCALE: (IN C.A.D	. 1:1)	SHEET	1 OF	2	
			DRAWING NUMBER: 629-25W3		3640-4N4		ISSUE	
YOUR CONNECTION TO	QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.			5W3640-4N4		1	

COMPLIANT



