

	0



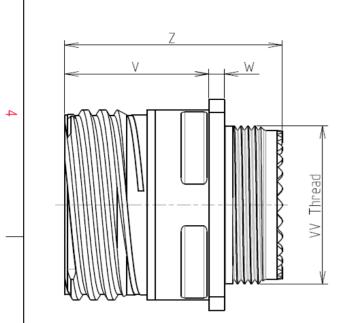

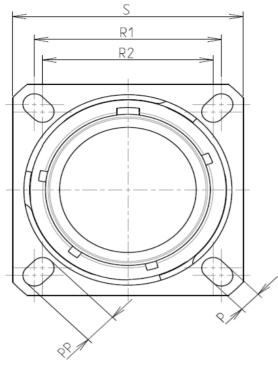

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

_

ω

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel				
	-Shell Plating	: Passivated				
	-Insulator	: Thermoplastic				
	-Contacts	: Copper Alloy				
	-Seals & Grommet	: Silicon Elastomer				
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
	-Durability	: 500 Mating cycles				
	-Delivered with Souriau contacts and Accessories					
	-Temperature Range	 -65°C to +200°C 				
	-Salt Spray	: 500 hours				
	-Mass	: 71.89 g ± 10%				
		0				

8D 0

G

17

-

К

08

Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 26.97 R2 24.61 S 33.3±0.3 V 20.83+0/-1.25 W 2.1/2.5 Z 31.5 Max VV THREAD M25x1-6g	P PP R1	3.25±0.2 4.93±0.2
PP 4.93±0.2 R1 26.97 R2 24.61 S 33.3±0.3 V 20.83+0/-1.25 W 2.1/2.5 Z 31.5 Max	PP R1	4.93±0.2
R1 26.97 R2 24.61 S 33.3±0.3 V 20.83+0/-1.25 W 2.1/2.5 Z 31.5 Max	R1	
R2 24.61 S 33.3±0.3 V 20.83+0/-1.25 W 2.1/2.5 Z 31.5 Max		26.97
S 33.3±0.3 V 20.83+0/-1.25 W 2.1/2.5 Z 31.5 Max	R2	
V 20.83+0/-1.25 W 2.1/2.5 Z 31.5 Max		24.61
W 2.1/2.5 Z 31.5 Max	S	33.3±0.3
Z 31.5 Max	V	20.83+0/-1.25
	W	2.1/2.5
VV THREAD M25x1-6g	Z	31.5 Max
	VV THREAD	M25x1-6g

П	m		D	0	σ	A	
R	1>						4
~ ⁸ /			LAYOUT SHOWN AS EXAMPLE				
Keying Show	Connector dimension Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 26.97 R2 24.61 S 33.3±0.3 V 20.83+0/-1.25 W 2.1/2.5 Z 31.5 Max VV THREAD M25x1-6g			due to a use of the the Specifications issued (professional re	liable for any non-conformi Products which does not co I by either of the Parties or l commendation, technical n Country Jurisc FR 8D017K08SE	mply with by a third party	2
			B 11-04-1	7 Drawing Update			
			ISS DATE Designed By:	Latest modification - by Date:			MOD N°
S E			SCALE	Stai	nless Steel Recepta	CUSTOMER DRAWING acle 8D series NPRDS / PROJECT 859	
ORIENTATION : E CONTACT TYPE : SOCKET(500 Matings)			NA		±	This document is the property of	
			SOURIAU WWW.SOUR		JRIAU.COM	ed or rmission	
CONTACT LAYOUT : 17-08			FORMAT		URIAU DRG N°	1	SHEET
F	E	1	A3	8 C	D017K08SE-C	A	1/2
1		\bigvee		0			

		G	гт —	m		0	
		Contact Layout					Panel Cuto
4	-x ($ \begin{array}{c} $			λ Ξ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Conta position A B C D E	Contacts (Insert arrangement 17-8) act IND Location X-axis (mm) X-axis (mm) Y-axis (mm) +.000 (0.00) +.236 (5.99) +.128 (3.25) +.096 (2.18) +.230 (5.84) 078 (1.98)			¥	Max. thickness panel for receptacle: Typ	Ø⊺ vpe 0: front mo
ω	F G H Shell Arrangement Nun size no. coi	230 (5.84)078 (1.98) 128 (3.25) +.086 (2.18)				Dim ØA ØAA R1 ØT	
						SOURIAU shall not be lia due to a use of the P the Specifications issued I	Products w by either c
N						(professional rec PN: 8	Count FR 3D017
					B 11-04-2 ISS DATE Designed By:	L7 Drawing Update	
<u> </u>					TITLE SCALE NA		eral linear lerances: ±
					FORMAT A3	SOL	RIAU.O URIAU 2017K
	Н	G	F	E	D	C C	

