### PS 1061 Test Probe, Ø 2 mm, 10 A



See below:

## **Approvals and Compliances**

| Description   |  | Weblinks pdf data sheet, html datasheet, General Product Information, Distribute          |  |
|---------------|--|---|--|
|               | Stock-Check, Accessories, Detailed request for product |   |  |
|               |  |   |  |
| 2 mm          | Resistance to Soldering Heat                           | 260°C / 5 sec acc. to IEC 60068-2-  |  |
| 10A           |  | 20, Test Tb, method 1A  |  |
| -25°C to 70°C | Weight   | 0.5 g   |  |
|               | Material: Housing                                      | Thermoplastic (PC), UL 94V-2  |  |
|               | Surface of contacts                                    | gold plated, Thickness 1.0 µm   |  |
|               | 10A  | 2 mm  2 mm  10 A  -25 °C to 70 °C  Resistance to Soldering Heat  Weight Material: Housing |  |

## **Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

### **Application standards**

Application standards where the product can be used


| Organization | Design                         | Standard     | Description   |
|--------------|--------------------------------|--------------|---|
| <u>IEC</u>   | Designed for applications acc. | IEC/UL 60950 | IEC 60950-1 includes the basic requirements for the safety of information technology equipment. |

## Compliances

The product complies with following Guide Lines

| Identification | Details    | Initiator   | Description   |
|----------------|------------|-------------|---|
| RoHS           | RoHS       | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/836  |
| <b>5</b> 0     | China RoHS | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.  |
| REACH          | REACH      | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force. |

## Dimensions [mm]

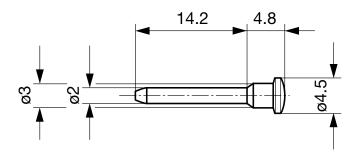

### **All Variants**

| Product group | Color | Order Number |
|---------------|-------|--------------|
| Test Probe    | red   | 0040.1062    |

Most Popular.

Availability for all products can be searched real-time:https://www.schurter. com/en/Stock-Check/Stock-Check-SCHURTER

100 Pcs Packaging unit

# **Mating Outlets/Connectors**

#### Category / Description



Test Jacks & Probes Overview complete

| PB 1011, 1 contact, 10 A, Test Jack            | PB 1011 |
|--|---------|
| PB 1021, 1 contact, 3 inputs, 6.3 A, Test Jack | PB 1021 |
| PB 1101, 10 A, Test Jack                       | PB 1101 |
| PB 1111, 1 contact, 10 A, Test Jack            | PB 1111 |
| PB 1151, 6.3 A, Test Jack                      | PB 1151 |
| Test Jacks & Probes further types to PS 1061   |         |

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each

product selected for their own applications.