


Specification Sheet

Part Number: 157-00172

One-piece cable tie and fixing offers a simple and easy to use method of bundling and fixing cables, through the design of the fir tree by ensuring positive and secure fixing into panels with thicknesses from 0.6-6.65mm. The offset on the cable tie creates an alternate solution when an offset fixing option is required and a tape clip cannot be used due to the design which reduces the potential of the bundle flexing or shifting.

The 'disc' on the top of the fir tree covers the hole and minimizes the ingress of water and dirt.

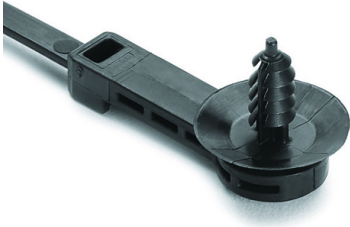

1-Piece Cable Tie/Fir Tree Mount, 25mm Offset, 9.1" Long, M6 Hole, 50lb, PA66HIRHSUV, Black, 500/pkg

Article Number	157-00172
Type	T50ROSFTM6SO25B
Color	Black (BK)
Quantity Per	carton

Product Description

HellermannTyton's Off-Set Fir Tree Cable Tie and fixing offers a simple and easy to use method of bundling and fixing cables, the design of the fir tree ensures a positive and secure fixing into panels with thicknesses from .2" - .26" or threaded blind holes. The 'disc' on the top of the fir tree covers the hole and minimizes the ingress of water and dirt.

Short Description	1-Piece Cable Tie/Fir Tree Mount, 25mm Offset, 9.1" Long, M6 Hole, 50lb, PA66HIRHSUV, Black, 500/pkg
Global Part Name	T50ROSFTM6SO25B-PA66HIRHSUV-BK
Minimum Tensile Strength (Imperial)	50.0
Minimum Tensile Strength (Metric)	225.0
Length L (Imperial)	9.1
Length L (Metric)	230.0
Offset Length (Imperial)	0.98
Offset Length (Metric)	25.0
Fixation Method	Fir Tree
Identification Plate Position	none
Releasable Closure	No
Width W (Imperial)	0.75
Width W (Metric)	4.6
Bundle Diameter Min (Imperial)	0.08
Bundle Diameter Min (Metric)	2.0

Bundle Diameter Max (Imperial)	1.97
Bundle Diameter Max (Metric)	50.0
Height H (Imperial)	0.86
Height H (Metric)	21.8
Panel Thickness Min (Imperial)	0.02
Panel Thickness Max (Imperial)	0.22
Panel Thickness Min (Metric)	0.60
Panel Thickness Max (Metric)	5.50
Mounting Hole Diameter D (Imperial)	0.24 x 0.48 " 0.25 x 0.50 " 0.25 x 0.51 " 0.27 x 0.47
Mounting Hole Diameter D (Metric)	6.5 x 13.0 mm 7.0 x 12.0 mm 6.5 x 12.5 mm 6.2 x 12.2 mm
Mounting Hole Diameter D Min (Imperial)	0.24
Mounting Hole Diameter D Max (Imperial)	0.24
Mounting Hole Diameter D Max (Metric)	6.0
Disc Diameter (Imperial)	0.75

Material Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV)

Material Shortcut	PA66HIRHSUV
Operating Temperature	-40°F to +221°F (-40°C to +105°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Package Quantity (Imperial)	500
Package Quantity (Metric)	500
Customs Number	3926909988

© 2021 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)