



(1)

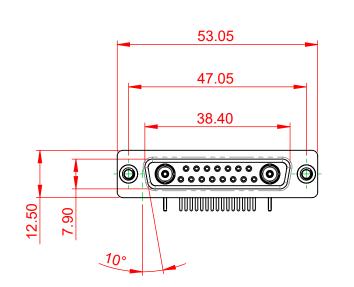



NOTES:

MATERIAL:
HOUSING:
SHELL:
CONTACT:THERMOPLASTIC POLYESTER, UL94V-0
STEEL, NICKEL PLATED
COPPER ALLOY, GOLD FLASH PLATEDOPERATING TEMPERATURE:-55°C ~ 125°CPOWER/CO-AX CONTACT RATING:
(IF PRESENT)
SIGNAL CONTACT CURRENT RATING:
SIGNAL CONTACT RESISTANCE:75Ω (IMPEDANCE)
10mΩ MAX.


 INSULATOR RESISTANCE:
 5000MΩ min.

 DIELECTRIC
 1000V AC rms


 WITHSTANDING VOLTAGE:
 1000V AC rms

.XX ±0.13

.XXX ±0.05



COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
		DRAWN: C.B	DATE: JAN. 01/2019	
		CHECKED: DATE:		
EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
		DRAWING NUMBER: 630-17W2240-7N2		ISSUE
		PART NUMBER: 630-17W2	2240-7N2	1





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

