



(1)






TOLERANCEUNLESS OTHERWISESPECIFIED.X±0.25.XX±0.13.XXX±0.05

10.70 5.80 9.40 2.54

NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:	THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED
OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	30A (CURRENT)
SIGNAL CONTACT CURRENT RATING SIGNAL CONTACT RESISTANCE:	: 5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.
WITHSTANDING VOLTAGE:	1000V AC rms

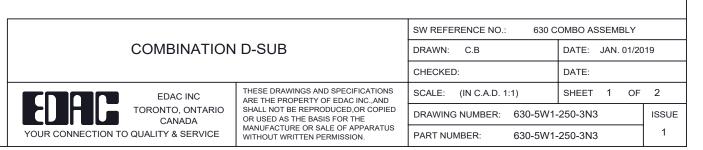

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

J

COMPLIANT

