
–	ц т		





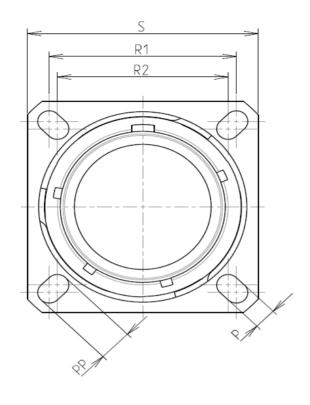

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 48 hours -Salt Spray -Mass : 16.46 g ± 10%

8D 0

G

13

F

26

Ρ

F

Е

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M18x1-6g


ORIENTATION : E

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 13-26

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

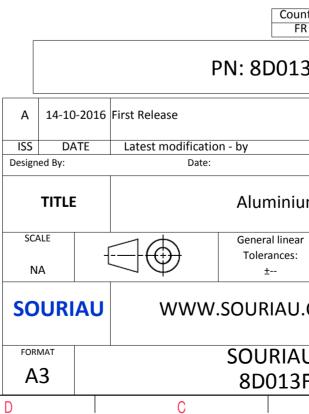

σ		Þ			
				4	
AS EXAMPLE				3	
any non-conformi s which does not co er of the Parties or I adation, technical n untry Jurisc FR 3F26PE	mply with by a third part			2	
			MOD N°		
I.COM	CUSTOMER DRAWING Receptacle 8D series NPRDS / PROJECT 859 This document is the property of SOURIAU SOURIAU it must not be reproduced or communicated without permission DRG N°				
BF26PE-C		A	1/2	ļ	

_	т	۵	п п	m	D	0
		Contact Layout				Panel Cutor
4	(26			22 -	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
_		6#22D			¥	
ω	Ctc A B C D E F 1 2	13-26 X Y 0 3.47 2.47 4.34 2.47 -4.34 0 -3.47 -2.47 -4.34 -2.47 4.34 3.25 0 -3.25 0				Dim ØA ØAA R1 ØT
	F					SOURIAU shall not be liable for an
						due to a use of the Products whether of the Specifications issued by either or (professional recommendat
N						Countr FR
					A 14-10-202	PN: 8D013
_					ISS DATE	Latest modification - by
					Designed By:	Date: Aluminiun
					SCALE NA	General linear Tolerances: ±
					SOURIAU	J WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D013F
L	Н	G	F	E	D	С

