


т	G	<b></b>	. m		
 			-	_	

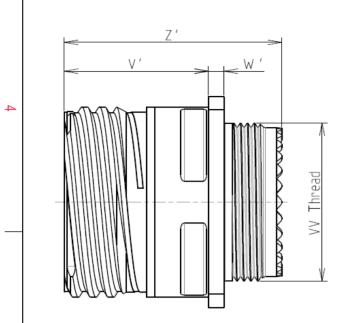

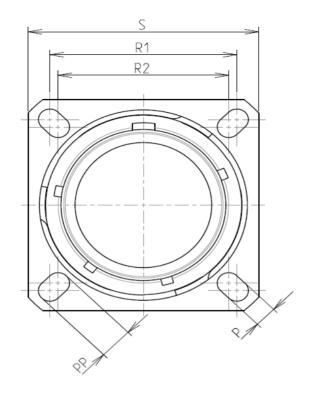



Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite				
	1				
-Shell Plating	: Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65°C to +200°C				

: 2000 hours

8D 0

G

13

Μ


08

Н

F

Е

Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M18x1-6g		

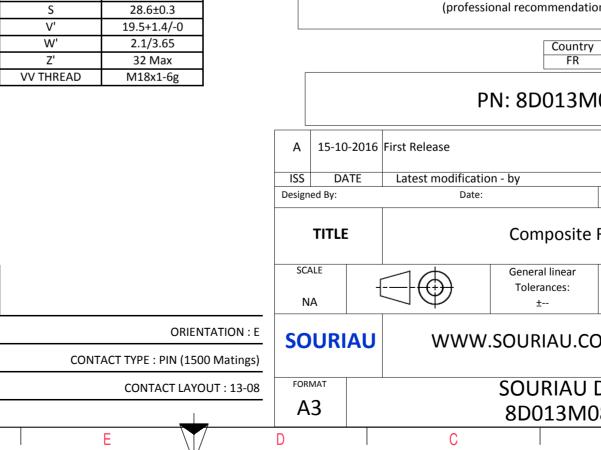

0		Φ		A		
LAY	OUT SHOWN AS EX	KAMPLE				
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed						
P First Release	N: 8D013N	108HE				
Latest modificatio	n - by	1			MOD N°	
Date: CUSTOMER DRAWING Composite Receptacle 8D series						
$\exists \bigoplus$	General linear Tolerances: ±		NPRDS / PR( <b>859</b>			
WWW.SOURIAU.COM       This document is the property of SOURIAU         it must not be reproduced or communicated without permission						
SOURIAU DRG N°         SHEET           8D013M08HE-C         1/2						
С		B		A	]	

	<b>工</b>	۵	н Г	m	U	0	
		Contact Layout				P	anel Cutout
4		$ \begin{pmatrix} \mathbf{G} \\ \mathbf{G} \\ \mathbf{G} \\ \mathbf{F} \\ \mathbf{G} \\ \mathbf{G}$			٨	SQUARE FLANGE RECEPTACLE (TYPE 0)	
	Con posi II A E C C C C E F C C C F	Uion D         X-axis (mm)         Y-axis (mm)           A         +.065 (1.65)         +.157 (3.99)           B         +.170 (4.32)         +.000 (0.00)           C         +.120 (3.05)        120 (3.05)           D         .000 (0.00)        170 (4.32)           E        120 (3.05)        120 (3.05)           F        170 (4.32)         +.000 (0.00)           S        065 (1.65)         +.157 (3.99)			¥ 		<u>ØT_</u>
သ		mber of Size Service Contact Supersedes ntacts contacts rating location 8 20 I All MS20051-8				Dim ØA ØAA R1 ØT	
						SOURIAU shall not be lia due to a use of the Pr the Specifications issued b (professional reco	roducts whi by either of
S						PN: 8[	Country FR D013N
					A 15-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
_					TITLE SCALE NA	Gene	mposite eral linear erances: ±
					SOURIA		
					FORMAT A3		JRIAU 013M(
	Н	G	F	E	D	С	

