


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00024	Connector, dc plug, 5.5x2.1xL23 mm, molding style, spring contacts	1	
2	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 76A	1	
3	24-00003	Overmold, PVC, black	1	

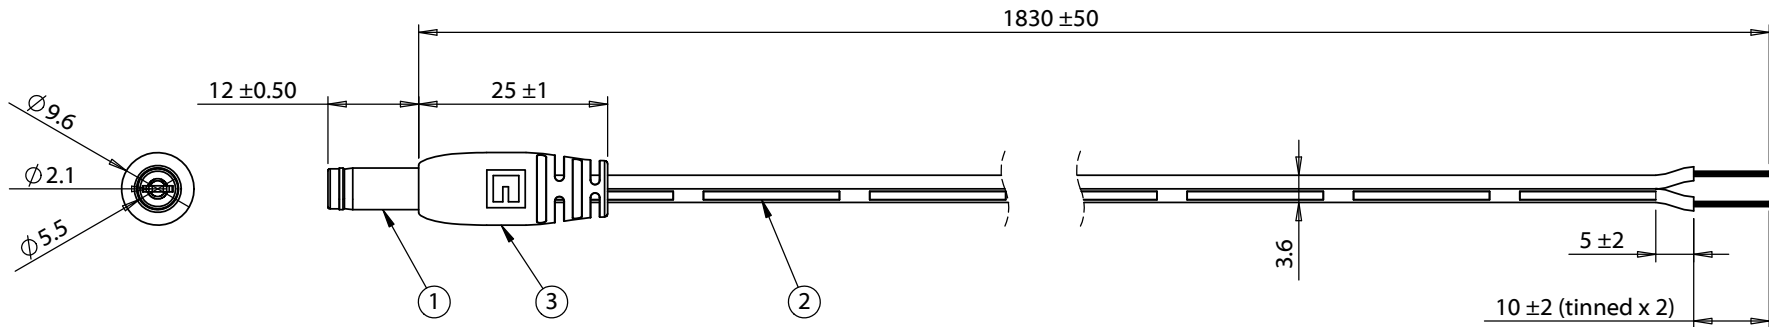

Wiring diagram	
50-00024	Wire Color
Center	Black with stripe
Sleeve	Black

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES	<h1>TENSILITY</h1> <p>20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com</p>
A	6/28/2012	Initial release	GL 2016.01.06 14:19:49 -08'00'	RoHS compliant	
			LA <small>Digitally signed by LA, DN: cn=LA, ou=Tensility, ou=Engineering, email=04022@tensility.com, c=US Date: 2016.01.19 11:32:26 -0800</small>	Function test: no open, no reversed polarity, no short circuit, no INT	
			DIMENSIONS ARE IN MILLIMETERS TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	4 A, 12 Vdc Functionally equivalent components may be used	
				DESCRIPTION: Cable, 1830 mm, 5.5x2.1x12 mm 50-00024 dc plug to stripped tinned, 24 AWG, 30-00003 wire	SIZE A PART NUMBER 10-01062
					SCALE: 1:1 WEIGHT: SHEET 1 OF 1