


т	G	<b></b>	. m		
 			-	_	

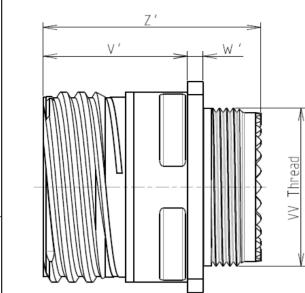

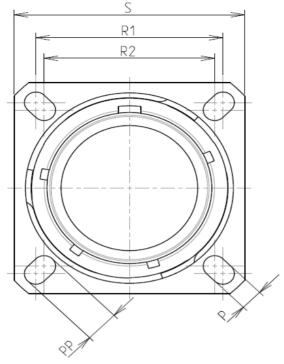



## CHARACTERISTIC

4

\_

ω

 $\sim$ 

\_

ם ד ו		D	0	₿ >		
Z' V' W' D D D D D D D D D D D D D D D D D D			LAUDT SHOWN AS E	XAMPLE		4
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III	Keying Shown as example Connector dimension Dim Nominal					
-Shell Material: Composite-Shell Plating: Nickel-Insulator: Thermoplastic-Contacts: Copper Alloy-Seals & Grommet: Silicon Elastomer	P3.25±0.2pell Material: Compositenell Plating: Nickelsulator: Thermoplasticcontacts: Copper AlloyV'19.5+1.4/-0			SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)		
<ul> <li>-Contact Plating : Gold over copper Alloy 0.8µm minimum</li> <li>-Durability : 500 Mating cycles</li> <li>-Delivered with Souriau contacts and Accessories</li> </ul>	Z' 32 Max VV THREAD M15x1-6g		PN: 8D011N	Not Listed		2
-Temperature Range <sub>:</sub> -65°C to +200°C -Salt Spray : 2000 hours		A 07-10-2016 ISS DATE Designed By:	First Release Latest modification - by Date:	CUSTOMER DRAWING	MOD N°	
BASIC SERIES: 8D 0 - 11 N	1 04 H N	SCALE	General linear Tolerances:	e Receptacle 8D series NPRDS / PROJECT 859		_
SHELL TYPE       : Square Flange Receptacle         CONTACT TYPE       : Standard Crimp Contact         SHELL SIZE       : 11	ORIENTA CONTACT TYPE : PIN (1500			COM This document is the province SOURIAU it must not be reprod communicated without	uced or	_ 1
PLATING : M = Nickel	F E	D FORMAT	SOURIAU 8D011M C		SHEET 1/2	

r	Ŧ	۵	п П	m	D	0
		Contact Layout				Panel Cutou
4	-×_	$ \begin{array}{c}                                     $			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Shell Arrangement Numt size no. cont size 4	V-axis (mm)         Y-axis (mm)           + 0.65 (1.65)         .065 (1.65)           + 0.65 (1.65)         .065 (1.65)           - 0.65 (1.65)         .065 (1.65)           - 0.65 (1.65)         .065 (1.65)           - 0.65 (1.65)         .065 (1.65)           - 0.65 (1.65)         .065 (1.65)           - 0.65 (1.65)         .065 (1.65)           - 0.65 (1.65)         .065 (1.65)           - 0.65 (1.65)         .065 (1.65)           - 0.65 (1.65)         .065 (1.65)           - 0.65 (1.65)         .065 (1.65)           - 0.65 (1.65)         .065 (1.65)           - 0.65 (1.65)         .065 (1.65)			α Υ	ØT ØA
ω						Dim ØA ØAA R1 ØT
	╞					SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either o
N						(professional recommendat Countr FR PN: 8D011N
					A 07-10-20 ISS DATE Designed By:	016 First Release
_					TITLE SCALE NA	General linear Tolerances:
					SOURIA	U WWW.SOURIAU.C
		1			FORMAT A3	SOURIAU 8D011M
	Н	l G	F	E \	D	C I

