

	Q	TT I	m	0



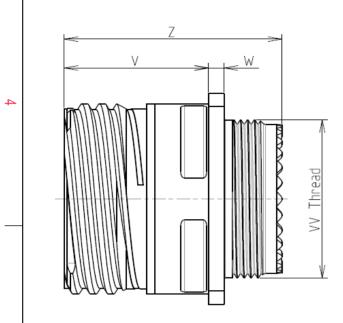

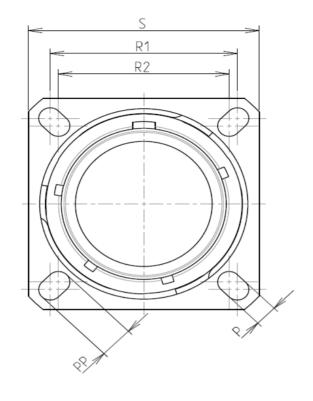

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 17

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Black Zinc Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts				
-Temperature Range	-65°C to +175°C			
-Salt Spray	: 500 hours			

: 24.62 g ± 10%

8D 0

G

17

Ζ

75

Ρ

F


А

L

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

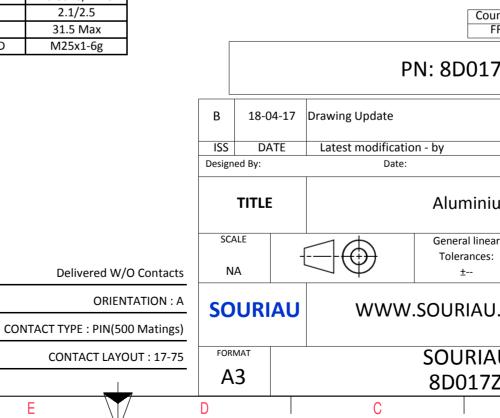

	Ξ		A			
					4	
AS EXA	AMPLE				3	
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)						
untry FR	Jurisd	liction & Cor Not Listed			2	
7Z75PAL						
		CUSTOM	ER DRAWING	MOD N°		
um Receptacle 8D series						
ar :	NPRDS / PROJECT					
	859 1 This document is the property of					
J.COM it must not be reproduced or communicated without permission						
	U DRG N° SHEET					
Z75	SPAL-C		A	1/2	J	
	D	I	A			

		G	г П	m	D	0	
		Contact Layout					Panel Cuto
4		75			λ Σ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75			<u>/</u>	Max. thickness panel for receptacle: Typ	Ø⊺ vpe 0: front m
ى						Dim ØA ØAA R1 ØT	
	-					SOURIAU shall not be lia due to a use of the P	Products w
0						the Specifications issued b (professional rec	Coun FR
					B 18-04- ISS DAT Designed By:	PN: 81	
_					SCALE NA	Alu 	uminiu eral linear lerances: ±
					FORMAT	WWW.SOU	RIAU.
					A3	8D	URIAL
·	Н	G	F	E	D	С	

