



.XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



	ISSUE	NUMBER
ORIGIN	AL	

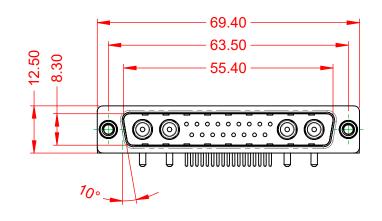





NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	10A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	$5000M\Omega$ min.



					SW REFERENCE NO.: 629 COMBO ASSEMBLY			
COMBI			DRAWN: C.B		DATE: JAN. 01/2019		)	
			CHECKED:		DATE:			
EDAC	' INIC'	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE	SCALE:	(IN C.A.D. 1:1)	SHEET 1	OF	2	
TORONTO, CAN	ADA		DRAWING NUMBER: 629-21W4240-1NE			1	ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE		MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUM	/BER: 629-21W4	4240-1NE		1	

1000V AC rms



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



WITHSTANDING VOLTAGE:

(1)

