
TOLERANCE UNLESS OTHERWISE SPECIFICATION OF MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER

(1)

ORIGINAL

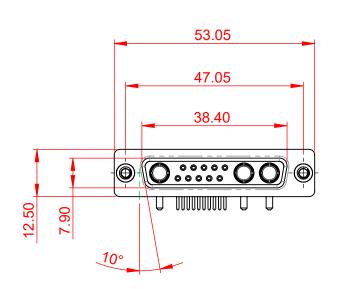



NOTES:

.X ±0.25 .XX ±0.13

.XXX ±0.05


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, NICKEL PLATED CONTACT: COPPER ALLOY, GOLD FLASH PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C

 $\label{eq:signal_contact_current rating: 5A per contact} \\ \mbox{Signal_contact resistance: 10m} Ω MAX. \\ \mbox{Insulator resistance: 5000M} Ω min. \\ \mbox{Dielectric} \\ \mbox{Withstanding voltage: 1000V AC rms} \\ \mbox{Insulator resistance: 1000V AC rms} \\ \mbox{Insulator resist$


CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm 40 IS STANDARD AS SHOWN ON SHEETS 3 & 4 CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm


| ſ | | SW REFERENCE NO.: 630 COMBO ASSEMBLY | | | |
|-------------|--------------------------------------|---|---------------------------------|--------------------|-------|
| | | | DRAWN: C.B | DATE: JAN. 01/2019 | |
| | | | CHECKED: | DATE: | |
| ſ | EDAC INC | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND | SCALE: (IN C.A.D. 1:1) | SHEET 1 OF | 4 |
| YOUR CONNEC | | SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | DRAWING NUMBER: 630-13W3250-1N2 | | ISSUE |
| | YOUR CONNECTION TO QUALITY & SERVICE | | PART NUMBER: 630-13W3 | 3250-1N2 | 1 |





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



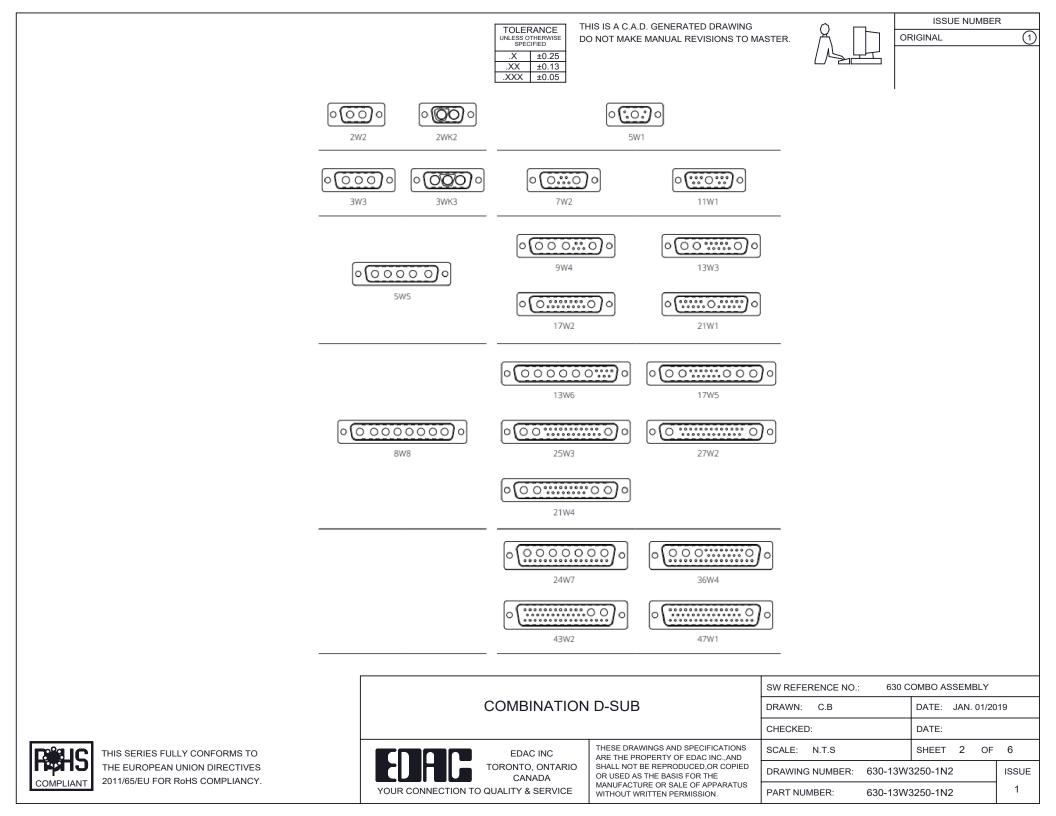



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

 $\overline{(1)}$

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female





5W5 Male




PCB EDGE

8W8 Male






PCB EDGE



21W4 Male/Female

PCB EDGE

27W2 Male/Female




21W1 Male/Female




| | | | | SW REFERENCE NO.: 630 COMBO ASSEMBLY | | | |
|-----------------|--|--|---------------------------------|--------------------------------------|-------|--|--|
| | COMBINATION D-SUB | | DRAWN: C.B | DATE: JAN. 01/20 |)19 | | |
| | | | CHECKED: | DATE: | | | |
| | EDAC INC | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | SCALE: N.T.S | SHEET 3 OF | 4 | | |
| | CURCENTED TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE | | DRAWING NUMBER: 630-13W3250-1N2 | | ISSUE | | |
| YOUR CONNECTION | | | PART NUMBER: 630-13W | /3250-1N2 | 1 | | |

5W5 Female




8W8 Female










PCB EDGE

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.







11W1 Male/Female

TOLERANCE UNLESS OTHERWISE SPECIFIED DAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

















13W3 Male





25W3 Male





2.77


24.77

23.36

PCB EDGE

PCB EDGE

36W4 Female

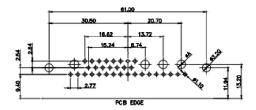

13W6 Male





30.50

2.77

22.16

20.78

13W6 Female

13W3 Female

.X±0.25.XX±0.13.XXX±0.05

43W2 Female




17W5 Male


COMPLIANT










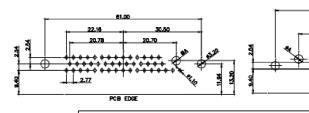

20.7

13.72

PCB EDGE

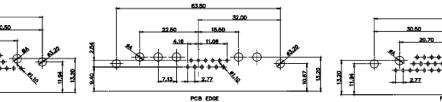

31.75

21.9

| PCB EDGE | PUB EDVE PCB EDVE PCB EDVE | | | | |
|--|--------------------------------------|--|--------------------------------------|------------|-------|
| | | | SW REFERENCE NO.: 630 COMBO ASSEMBLY | | |
| | COMBINATION | DRAWN: C.B | DATE: JAN. 01/20 | 19 | |
| | | | CHECKED: | DATE: | |
| THIS SERIES FULLY CONFORMS TO | EDAC INC | OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS | SCALE: N.T.S | SHEET 4 OF | 4 |
| THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR R₀HS COMPLIANCY. | TORONTO, ONTARIO CANADA | | DRAWING NUMBER: 630-13W3250-1N2 | | ISSUE |
| | YOUR CONNECTION TO QUALITY & SERVICE | | PART NUMBER: 630-13W | 3250-1N2 | 1 |