



S21 TRANS LOG MAG.
▶ 0.000 dB 0.100 dB/DIV

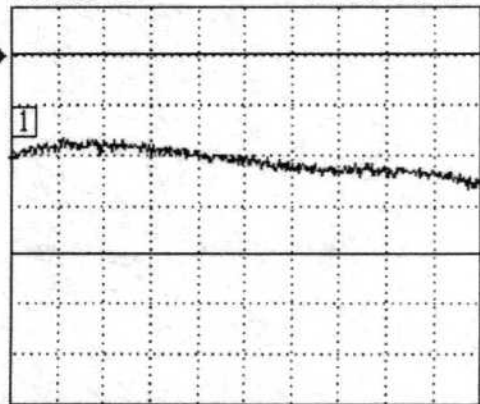


0.800000000 GHz 1.000000000

S11 REFL LOG MAG.
▶ 0.000 dB 5.000 dB/DIV

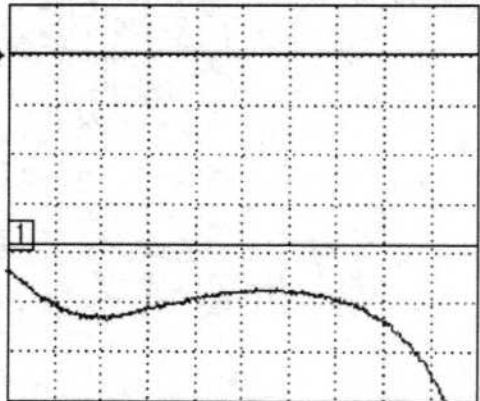


0.800000000 GHz 1.000000000

S22 REFL LOG MAG.
▶ 0.000 dB 5.000 dB/DIV

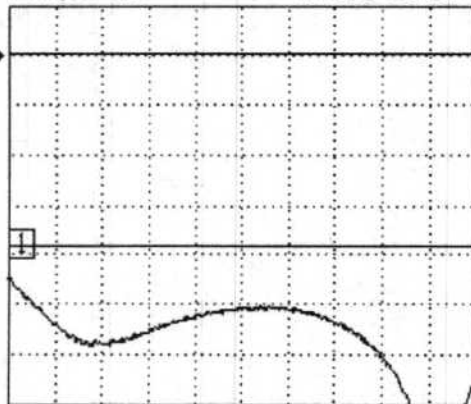

0.800000000 GHz 1.000000000

S12 TRANS LOG MAG.
▶ 0.000 dB 5.000 dB/DIV

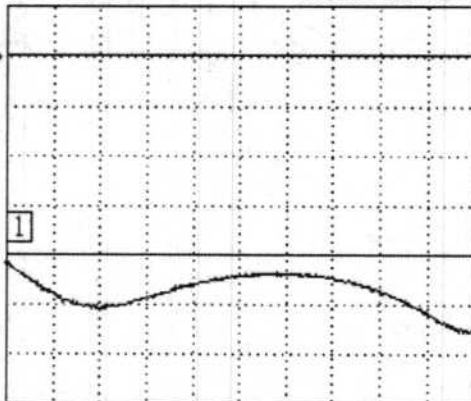

0.800000000 GHz 1.000000000

CH 4 - S12
0.0000 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 1
0.800000000 GHz
-20.809 dB

▶ MARKER TO MAX
MARKER TO MIN

MARKER READOUT
FUNCTIONS

D3I0810S - Isolator

Isolation: 20 dB Min
Insertion Loss: 0.40 dB Max
VSWR: 1.25:1 dB Max
SMA-F Connectors