

**Ratings**

Voltage: 300 V  
 Temperature: -25 ~ 80 °C  
 Flammability: VW-1

**Conductor**

Conductor count: 2  
 Gauge: 20 AWG 0.52 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size:  $\varnothing 0.16 \times 26$   
 Resistance at 20 °C: 36.7  $\Omega$  /km max

**Insulator**

Material: PVC  
 Color: white, black  
 Diameter:  $\varnothing 1.55 \pm 0.10$  mm  
 Nominal thickness: 0.28 mm  
 Resistance at 20 °C: 10 M $\Omega$  /km min


**Outer jacket**

Material: PVC  
 Color: black  
 Diameter:  $\varnothing 4.7 \pm 0.20$  mm  
 Nominal thickness: 0.80 mm

**Wire marking:** E339579 UL AWM STYLE 2464 20 AWG 80°C 300V VW-1 --- cUL AWM I/II A 80°C 300V FT1 LF TENSILITY

**Tests**

Insulation tensile strength: 2.11 kgf/mm<sup>2</sup>  
 Jacket tensile strength: 1.05 kgf/mm<sup>2</sup>  
 After aging at 113 ± 2 °C for 7 days:  
     Minimum tensile strength 70 % original  
     Minimum elongation 65 % original  
 Heat shock: 121 ± 1 °C / 1 hour, no observed degradation  
 Deformation: 121 ± 1 °C / 1 hour, ≤ 50 %  
 Cold bend: -10 ± 2 °C / 1 hour, no observed cracking

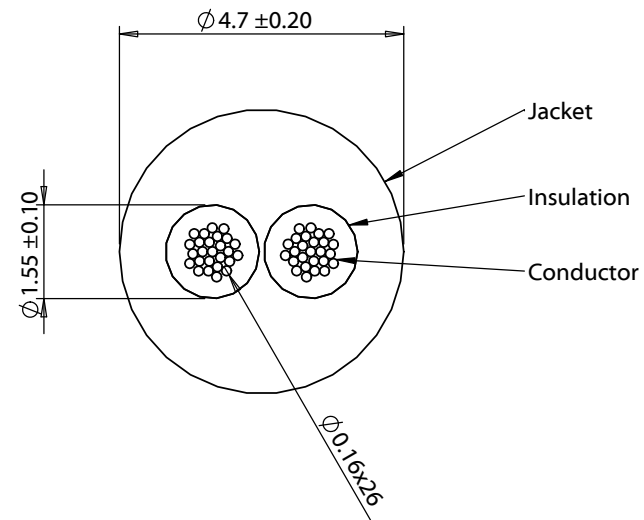

Revision:	Date:	Description:	Prepared:	Notes:	<b>TENSILITY</b> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com	
A	06/24/2014	Initial release	Verified:	RoHS and REACH compliant Function test: no open, no short circuit, no intermittent		
A1	09/06/2018	Increased operating temperature range	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:	Size: Part number: A 30-00353	
				Wire, 2C TS, 20 AWG, UL2464, 300V, 80C, 4.7 mm, VW-1, PVC	Scale: 8:1	Sheet 1 of 1