


.XXX ±0.05


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

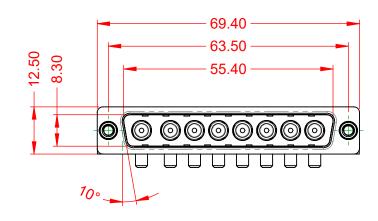



10.67 **OPERATING TEMPERATURE:** P (IF S S Θ 0 13.20-IN DI

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED

OWER/CO-AX CONTACT RATING:	30A (CURREI
F PRESENT)	
IGNAL CONTACT CURRENT RATING:	5A PER CON
IGNAL CONTACT RESISTANCE:	10mΩ MAX.
NSULATOR RESISTANCE:	$5000M\Omega$ min.
IELECTRIC	


WITHSTANDING VOLTAGE:

ENT)

-55°C ~ 125°C

ITACT

1000V AC rms



			SW REFERENCE NO.: 629 C	OMBO ASSEMBLY	
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
	EDACINC TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-8W8-	640-3NE	ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 629-8W8-	640-3NE	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

