

**Data sheet | Item number: 285-173**

Allen wrench; with a partially insulated shaft; with anti-rotation protection;  
green

[www.wago.com/285-173](http://www.wago.com/285-173)



**Data**

**Technical data**

Main product function	Operating tool
-----------------------	----------------

**Material Data**

Color	green
Weight	87.7 g

**Commercial data**

eCl@ss 10.0	21-04-02-06
eCl@ss 9.0	21-04-02-06
ETIM 8.0	EC000818

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



ETIM 7.0	EC000818
PU (SPU)	25 pcs 25 Stück
Packaging type	box
Country of origin	DE
GTIN	4055143826921
Customs tariff number	82041100000

### Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

### Downloads

#### Documentation

##### Additional Information

Technical explanations	2019 Apr 3	pdf 2.2 MB	Download
------------------------	------------	---------------	----------

### Environmental Product Compliance


#### Compliance Search

Environmental Product Compliance 285-173	URL	Download
Allen wrench; with a partially insulated shaft; with anti-rotation protection; green		

### Installation Notes


#### Conductor termination

Subject to changes. Please also observe the further product documentation!

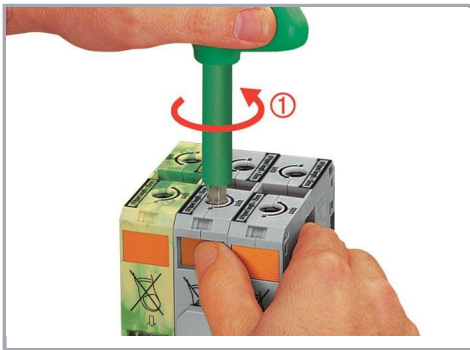

**Conductor termination – step 1:**

Rotate the T-wrench counter-clockwise to the stop. Next, push in the orange locking tab. The clamp is locked open for hands-free wiring.

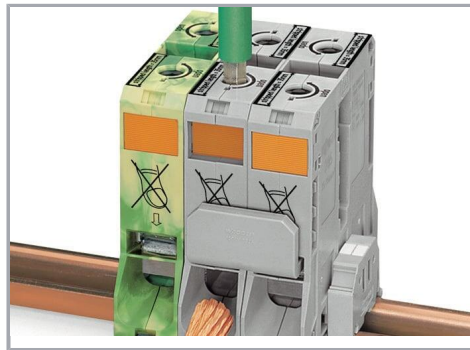

**Conductor termination – step 2:**

Insert a stripped conductor into the clamping unit until it hits the backstop. Hold in this position.

Subject to changes. Please also observe the further product documentation!



**Conductor termination – step 3:**

A short counter-clockwise rotation releases the tab. When unlocked, the T-wrench rotates clockwise, securely clamping the conductor.

Subject to changes. Please also observe the further product documentation!