



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER

(1)

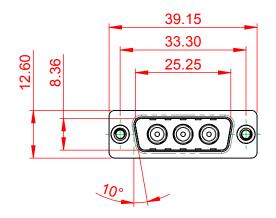



NOTES:



MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, Sn or Ni PLATED CONTACT: COPPER ALLOY SEE ORDERING GUIDE FOR PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mΩ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

				SW REFERENCE NO.: 627 COMBO ASSEMBLY			
COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19			
			DATE:				
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4			
	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 627-3W3-224-4ND		ISSUE			
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 627-3W3	-224-4ND	1			



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



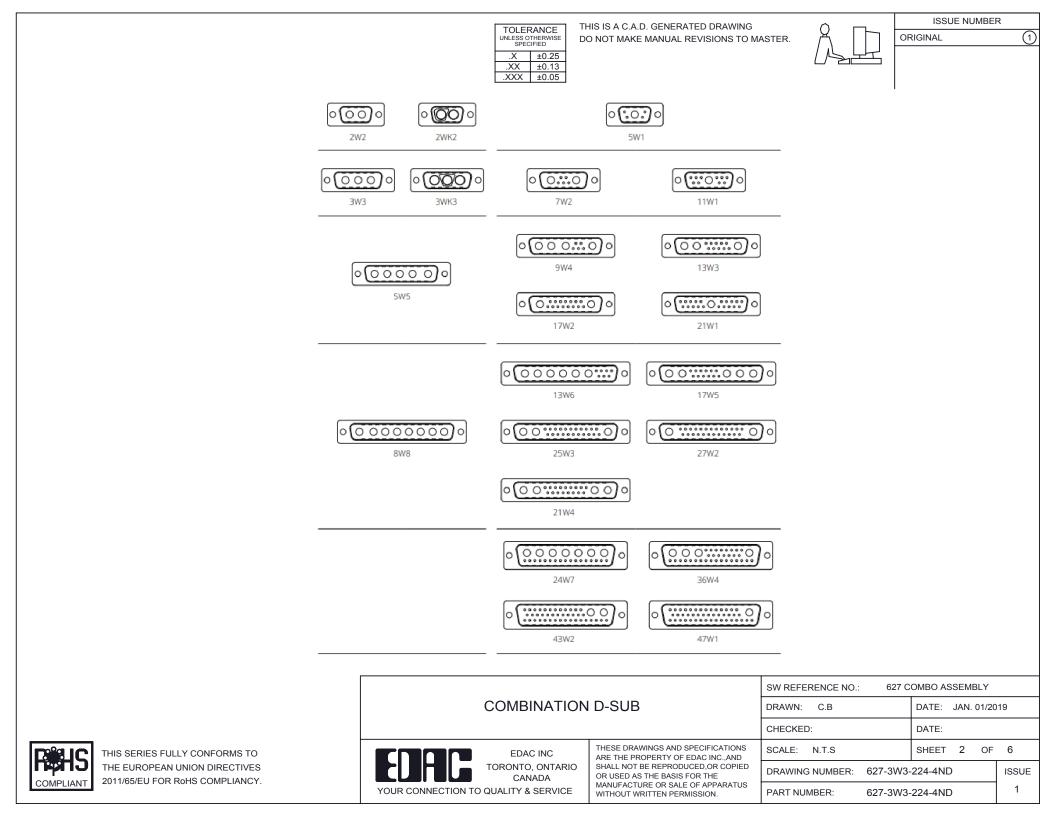

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25 .XX ±0.13 .XXX ±0.05



 $\overline{(1)}$

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female





21W4 Male/Female



27W2 Male/Female



21W1 Male/Female



		SW REFERENCE NO.: 627 COMBO ASSEMBLY			
	COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: N.T.S	SHEET 3 OF	4
	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 627-3W3-	-224-4ND	ISSUE
			PART NUMBER: 627-3W3-	-224-4ND	1

5W5 Male

5W5 Female



47.05


23.53

8W8 Male

8W8 Female

31.75

22.83





11W1 Male/Female



17W2 Male/Female

23.63 8.31

THIS SI THE EU COMPLIANT

THIS SERIES FULLY CONFORMS TO	
THE EUROPEAN UNION DIRECTIVES	
2011/65/EU FOR RoHS COMPLIANCY.	

CURRENT RATING / ØA 10A / 2.2 20A / 3.3

> 30A / 3.7 40A / 4.2

22.97

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25



25W3 Female






25W3 Male



47.00

23.53




20.70

13.72

47.02 23.53 14.51 9.70 1 82 7.79 33

23 63




47.05

14.63

9,70

. 8.317.79

2.77



2 77

13W3 Male

3 3




13W3 Female


.XX ±0.13 .XXX ±0.05

9W4 Female






13W6 Male




43W2 Male






17W5 Female



43W2 Female


47W1 Female



17W5 Male









22.16 20.78 2.77

	COMBINATION D-SUB		SW REFERENCE NO.: 627 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
RMS TO	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: N.T.S	SHEET 4 OF	4
ECTIVES PLIANCY.	EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 627-3W3-224-4ND		ISSUE
-LIANGT.			PART NUMBER: 627-3W	3-224-4ND	1



THIS SERIES FULLY CONFORM THE EUROPEAN UNION DIREC 2011/65/EU FOR RoHS COMPL



30.50

16.62

15.24

