



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

ISSUE NUMBER

ORIGINAL


(1)

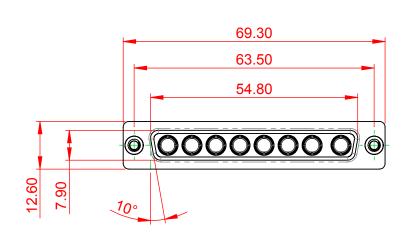






SIGNAL CONTACT RESISTANCE: 10mQ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

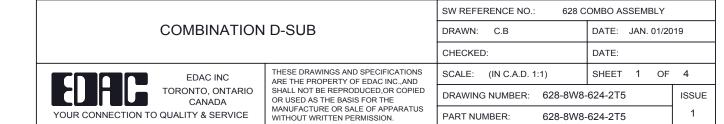



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



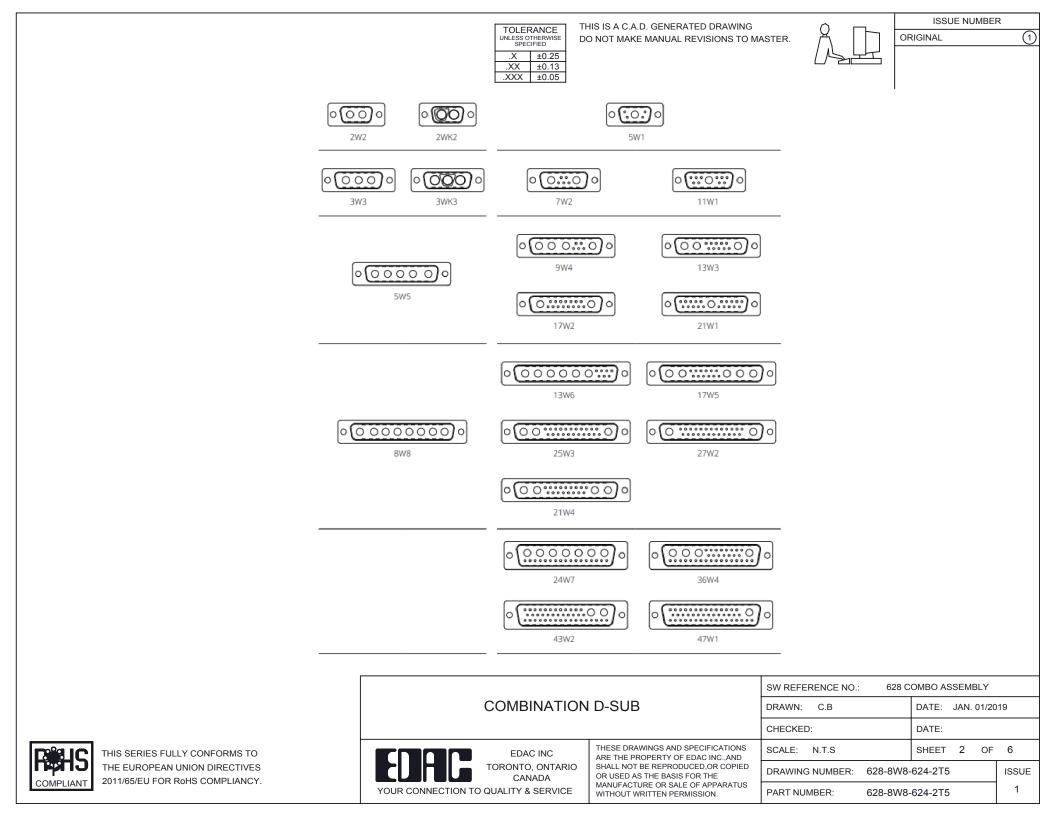

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25 .XX ±0.13 .XXX ±0.05





5W5 Male

5W5 Female

COMPLIANT

3W3 / 3WK3

8W8 Male

3.30

5W1 Male/Female

7W2 Male/Female





(1)

21W4 Male/Female

		33.30 6.60 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31 1.31		63.50 31.75 90 9.70 € ★ 4 6 6 + 6 6 € ↓ 2.77	- see
	11W	1 Male/Female	27W2 Male/Femal	e	
e 8W8 Fe	male 31.75 72.83 72.83 72.87 72.8	33.30 16.65 9.70		63.50 31.75 15.24 ++++++++ +++++++++++++++++++++++++++	
	17W	2 Male/Female	21W1 Male/Femal	e	
CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2		47.00 23.03 1.3.05 0.31 0.31 0.00 0.		47.05 23.03 25.03 25	ø
			SW REFERENCE NO.: 628 C	OMBO ASSEMBLY	
	COMBINATION	N D-SUB	DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
THIS SERIES FULLY CONFORMS TO		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED	SCALE: N.T.S	SHEET 3 OF	
THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.	CUTU TORONTO, ONTARIO CANADA	OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 628-8W8		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE	WITHOUT WRITTEN PERMISSION.	PART NUMBER: 628-8W8-	-624-2T5	1

	EDAC INC TORONTO, ONTARIO CANADA	TH AR SH OF
YOUR CONNECTION TO	QUALITY & SERVICE	WI

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.






9W4 Male




25W3 Male









36W4 Female



13W3 Male



36W4 Male








13W6 Male



43W2 Male






17W5 Female

.X ±0.25 .XX

±0.13 .XXX ±0.05


9W4 Female

13W3 Female






47W1 Female




17W5 Male


COMPLIANT



47W1 Male







	COMBINATION D-SUB		SW REFERENCE NO.: 628 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
IS TO	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: N.T.S	SHEET 4 OF	4
TIVES ANCY. YOUR C		SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 628-8W8	3-624-2T5	ISSUE
			PART NUMBER: 628-8W8	3-624-2T5	1

THIS SERIES FULLY CONFORMS THE EUROPEAN UNION DIRECTI 2011/65/EU FOR RoHS COMPLIAN

