

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.

ISSUE NUMBER	
ORIGINAL	(1)

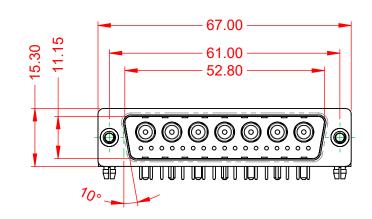




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED




OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	10A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
	5000MO min

.X ±0.25 .XX ±0.13 .XXX ±0.05

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE: $5000M\Omega$ min.

1000V AC rms



				SW REFERENCE NO.: 629 COMBO ASSEMBLY					
			DRAWN: C.B			DATE: JAN. 01/2019			
			CHECKED:		DATE:				
		EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: ((IN C.A.D. 1:1)		SHEET	1 0	F 2
	YOUR CONNECTION TO QUALITY & SERVICE	,	SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-24W			/7240-1TB		ISSUE
YOU		MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUM	BER: 62	9-24W7	7240-1TB		1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

