



.XX ±0.13 .XXX ±0.05



| ISSUE NUMBER |   |
|--------------|---|
| ORIGINAL     | 1 |

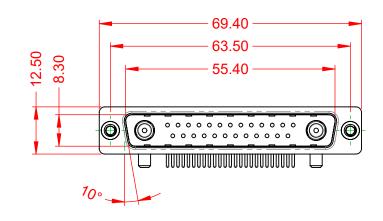




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED




30A (CURRENT) **POWER/CO-AX CONTACT RATING:** (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX. **INSULATOR RESISTANCE:** 5000MΩ min. DIELECTRIC

WITHSTANDING VOLTAGE:

**OPERATING TEMPERATURE:** 

1000V AC rms

-55°C ~ 125°C



|             |                                      |   | SW REFERENCE NO.: 629 COMBO ASSEMBLY |                  |       |
|-------------|--------------------------------------|---|--------------------------------------|------------------|-------|
|             |                                      |   | DRAWN: C.B                           | DATE: JAN. 01/20 | 19    |
|             |                                      |   | CHECKED:                             | DATE:            |       |
| то          | EDAC INC                             | THESE DRAWINGS AND SPECIFICATIONS<br>ARE THE PROPERTY OF EDAC INC.,AND  | SCALE: (IN C.A.D. 1:1)               | SHEET 1 OF       | 2     |
| VES<br>ICY. | YOUR CONNECTION TO QUALITY & SERVICE | SHALL NOT BE REPRODUCED, OR COPIED<br>OR USED AS THE BASIS FOR THE<br>MANUFACTURE OR SALE OF APPARATUS<br>WITHOUT WRITTEN PERMISSION. | DRAWING NUMBER: 629-27W2250-312      |                  | ISSUE |
|             |                                      |   | PART NUMBER: 629-27W                 | 2250-3T2         | 1     |



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVE 2011/65/EU FOR RoHS COMPLIANC

