
TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.





(1)

ORIGINAL

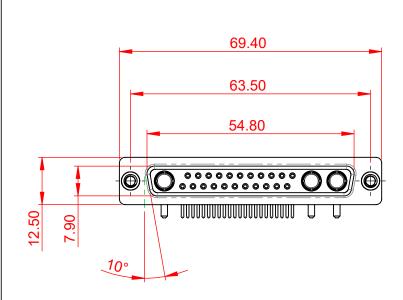



NOTES:


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, Sn or Ni PLATED CONTACT: COPPER ALLOY SEE ORDERING GUIDE FOR PLATING



.X ±0.25 .XX ±0.13

.XXX ±0.05


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. INSULATOR RESISTANCE: $5000M\Omega$ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms



ſ			SW REFERENCE NO.: 630 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4
	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-25W	3240-1NA	ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-25W	3240-1NA	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

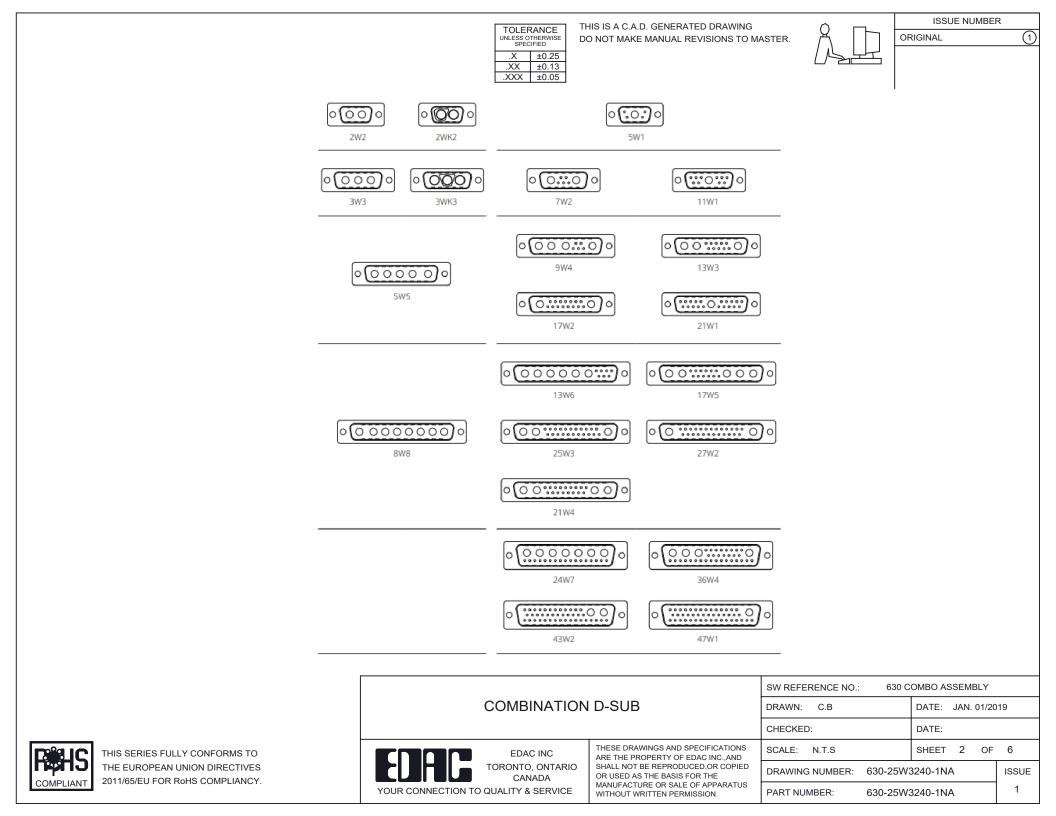



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female


24W7 Male/Female



ISSUE NUMBER

(1)


5W5 Male



PCB EDGE




PCB EDGE



2.77

5W5 Female




8W8 Female

CURRENT RATING / ØA

10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2







17W2 Male/Female



11W1 Male/Female





630 COMBO ASSEMBLY

SHEET 3

DATE:

630-25W3240-1NA

630-25W3240-1NA

DATE: JAN. 01/2019

OF 4

ISSUE


1

SW REFERENCE NO. COMBINATION D-SUB C.B DRAWN: CHECKED: THESE DRAWINGS AND SPECIFICATIONS SCALE: N.T.S EDAC INC ARE THE PROPERTY OF EDAC INC..AND TORONTO, ONTARIO SHALL NOT BE REPRODUCED, OR COPIED DRAWING NUMBER: OR USED AS THE BASIS FOR THE CANADA MANUFACTURE OR SALE OF APPARATUS YOUR CONNECTION TO QUALITY & SERVICE PART NUMBER: WITHOUT WRITTEN PERMISSION.




THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

83.50 	8W8 Male		
	r	.50	
	- T		4




POB EDGE



27W2 Male/Female


21W4 Male/Female




21W1 Male/Female


THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.















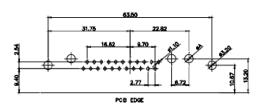


13W3 Male






25W3 Male






24,77

PCB EDGE



31.75

36W4 Female

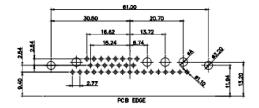

13W6 Male








13W3 Female

.X ±0.25 .XX

±0.13 .XXX ±0.05

43W2 Female

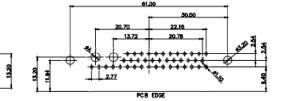
















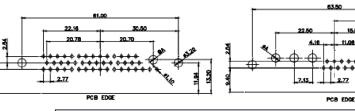

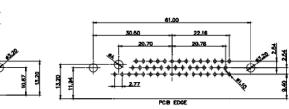



22.18

2.77

20.78

20.7

13.72

PCB EDGE