



## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:	THERMOPLASTIC POLYESTER, UL94V STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATEI	
OPERATING TEMPERATURE:	-55°C ~ 125°C	
POWER/CO-AX CONTACT RATING: (IF PRESENT)	50Ω (IMPEDANCE)	
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.	S
INSULATOR RESISTANCE:	5000MΩ min.	
DIELECTRIC WITHSTANDING VOLTAGE:	1000V AC rms	



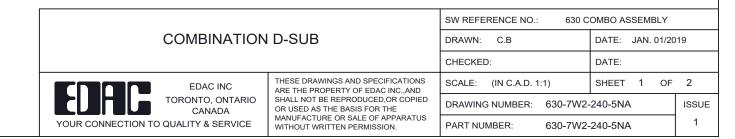



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. **ISSUE NUMBER** 

(1)

