

	т	۵	н т	m	D	0	
]							



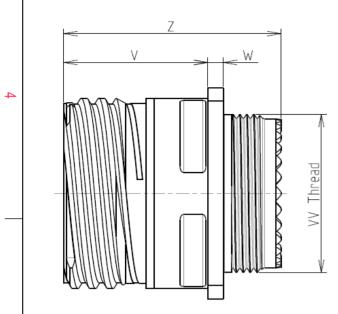

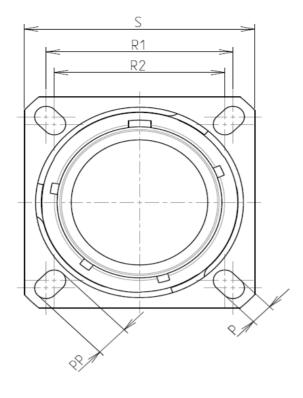

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 19

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite
-Shell Plating	: Without Plating
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	: -65℃ to +175℃

: 2000 hours

: 39.7 g ± 10%

8D 0

G

19

Х

11

В

F

Ν


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	29.36		
R2	26.97		
S	36.5±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M28x1-6g		


ORIENTATION : N

CONTACT LAYOUT : 19-11

CONTACT TYPE : SOCKET(500 Matings)

Е



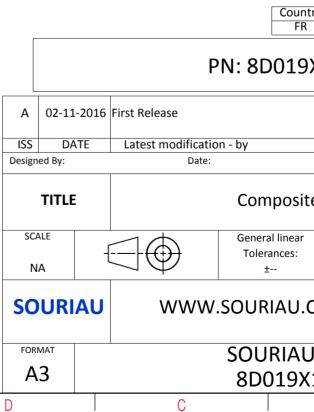

	œ			A		
						4
S EXA	AMPLE					3
s whic er of t adatio untry R	non-conformit th does not co he Parties or b on, technical no Jurisd	mply wit by a thirc otice.)	h I party Control List			2
		сията	OMER DRAWI		/OD N°	
	e Receptacle 8D series					
ar		NPF	RDS / PROJECT 859			
I.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission			1		
	DRG N°				SHEET	
X1	1BN-C				1/2	
	В			А		

