


**Note for plug:**  
 Material:  
 Housing-Polycarbonate,clear.  
 Terminal-0.36[.014] thick phosphor bronze.  
 Thick gold in localized gold plate.  
 Area,Gold flash over the remainder.  
 Over 2.54mm[.000100] thick nickel underplate.  
 ① Conductor: [26AWG(0.12x12) BARE COPPER]x8C.  
 ① Insulation: (PP6331 ID: 0.95-1.0)x8C.  
 ① Jacket: PVC NOUL 80P.  
 ① Package: Individual PE Bag.

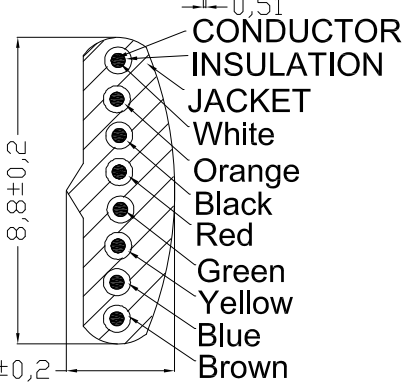

P1	P2	
1	White	1
2	Orange	2
3	Black	3
4	Red	4
5	Green	5
6	Yellow	6
7	Blue	7
8	Brown	8

Order code: AT-C-26-8/8/x-xx/R ①

Order color:  
 B: Black  
 W: White  
 S: Silver

Length Code	Retracted Length(L3)	Extended Length(L2)	Cut Length(L1)
5	700±50	5.0FT-5.75FT	2900-3000
7	1000±50	7.0FT-8.05FT	4000-4200
10	1500±50	10.0FT-11.5FT	5900-6100
12	1650±50	12.0FT-13.8FT	7000-7200
14	1900±50	14.0FT-16.1FT	7600-7800
25	3200±50	25.0FT-28.75FT	14300-14500

RoHS compliant  
 Unit: mm

Scale	Free				Date	Name	Customer-No.
TOLERANCE					Drawn	18.12.2017	Amy
.x	±0.50				Approved	23.02.2019	Amy
.xx	±0.20						
DIM	TOL	① Update the dimension, notes and add the cut length	23.02.2019	Segal			
		② Drawn	18.12.2017	Amy			
Angle	±2°	Id.	Modification	Date			

ASSMANN WSW-No.	
AT-C-26-8/8/x-xx/R	
Drawing-No.	
ASS 8165 CA	rev01
Replace	

Scale	Free
TOLERANCE	
.x	±0.50
.xx	±0.20
DIM	TOL
Angle	±2°