



S21 TRANS LOG MAG.  
▶0.000 dB 0.100 dB/DIV

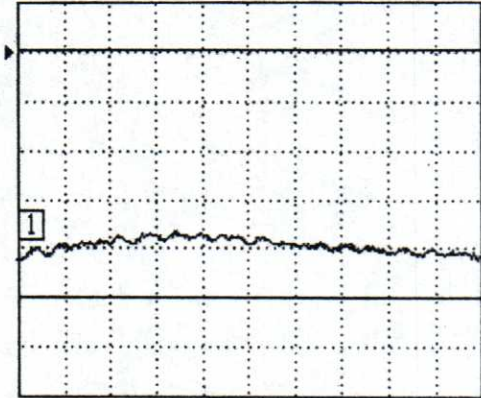


12.75000000 GHz 14.50000000

S11 REFL LOG MAG.  
▶0.000 dB 5.000 dB/DIV

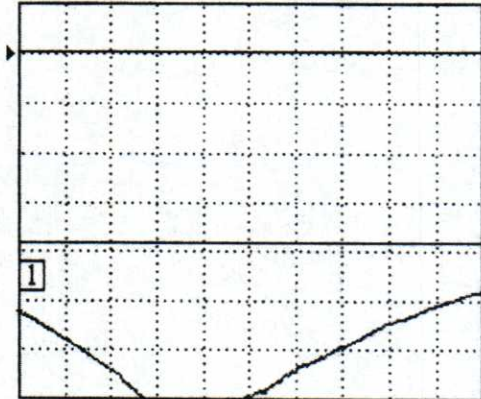


12.75000000 GHz 14.50000000

S22 REFL LOG MAG.  
▶0.000 dB 5.000 dB/DIV

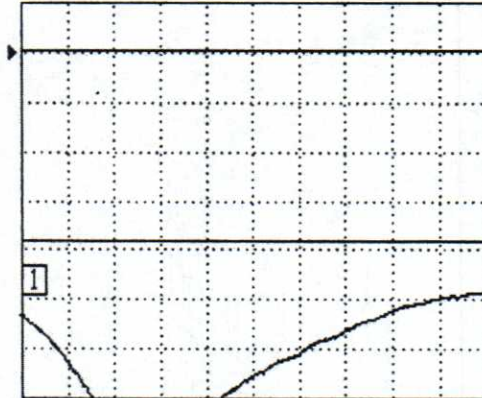

12.75000000 GHz 14.50000000

S12 TRANS LOG MAG.  
▶0.000 dB 5.000 dB/DIV

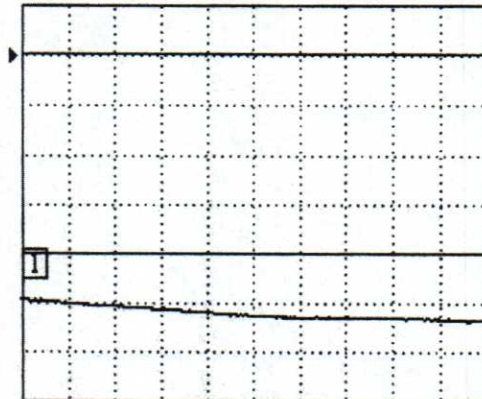

12.75000000 GHz 14.50000000

CH 1 - S21  
0.0000 mm REF  
0.000 dB OFFSET  
0.00° OFFSET

MARKER 1  
12.75000000 GHz  
-0.424 dB

MARKER TO MAX  
▶MARKER TO MIN

MARKER READOUT  
FUNCTIONS

D3C 1214 - circulator

12.75-14.50 GHz

Isolation: 20 dB Min

Insertion Loss: 0.50 dB Max

VSWR: 1.25:1 Max

SMA-F All 3 Ports