


SEE DETAIL "A"


SECTION A-A

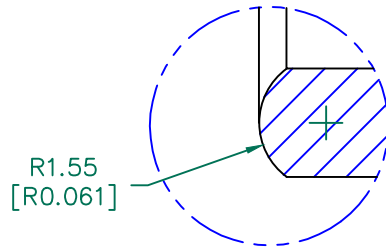

DETAIL "A"
SCALE: 6:1

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	34 Ω	86 Ω	201 Ω
Minimum	- Ω	69 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

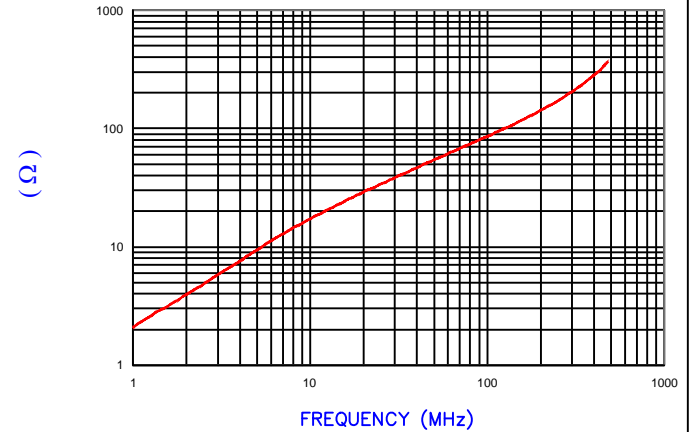

AGILENT E4991A Impedance/Material Analyzer
HP 16092A Test Fixture,


FERRITE CORE DIMENSIONS (SPEC):mm [Inches]

A	10.00 [.394]	±	0.20 [.008]
B	5.00 [.197]	±	0.20 [.008]
C	5.00 [.197]	±	0.25 [.010]

WEIGHT/1000 1.35 kgs 2.98 lbs

NOTES:

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

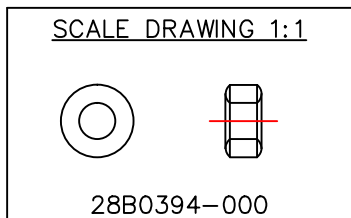

RoHS

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird		
				PROJECT/PART NUMBER:		REV	PART TYPE:	DRAWN BY:
				28B0394-000		B	FERRITE CORE	Jcai
B	UPDATE TOOL AND NOTE	12/07/16	QIU	DATE:	09/05/11	SCALE:	3 : 1	MATERIAL:
A	ORIGINAL DRAFT	09/05/11	Jcai	CAD #	28B0394-000-B	TOOL #	B0394A	FERRITE
REV	DESCRIPTION	DATE	INT					