
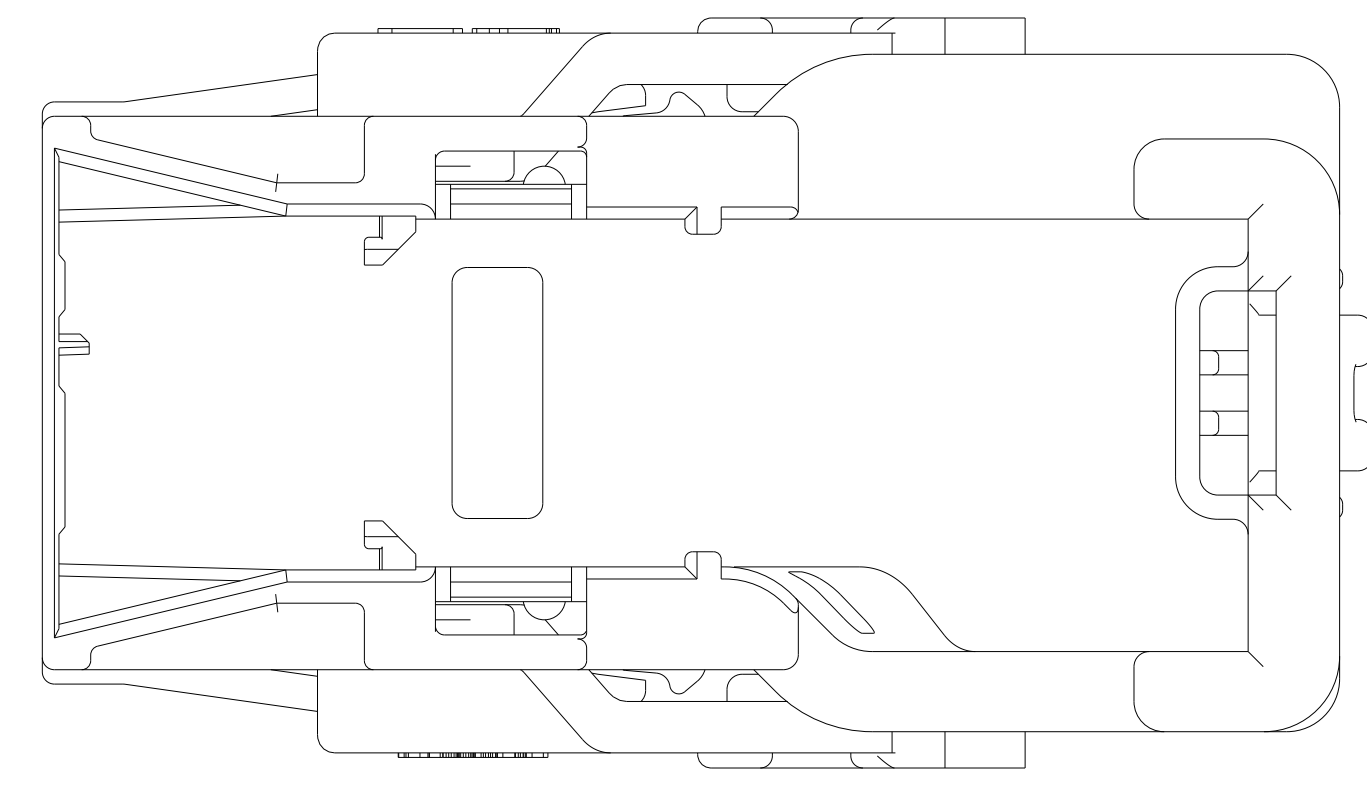
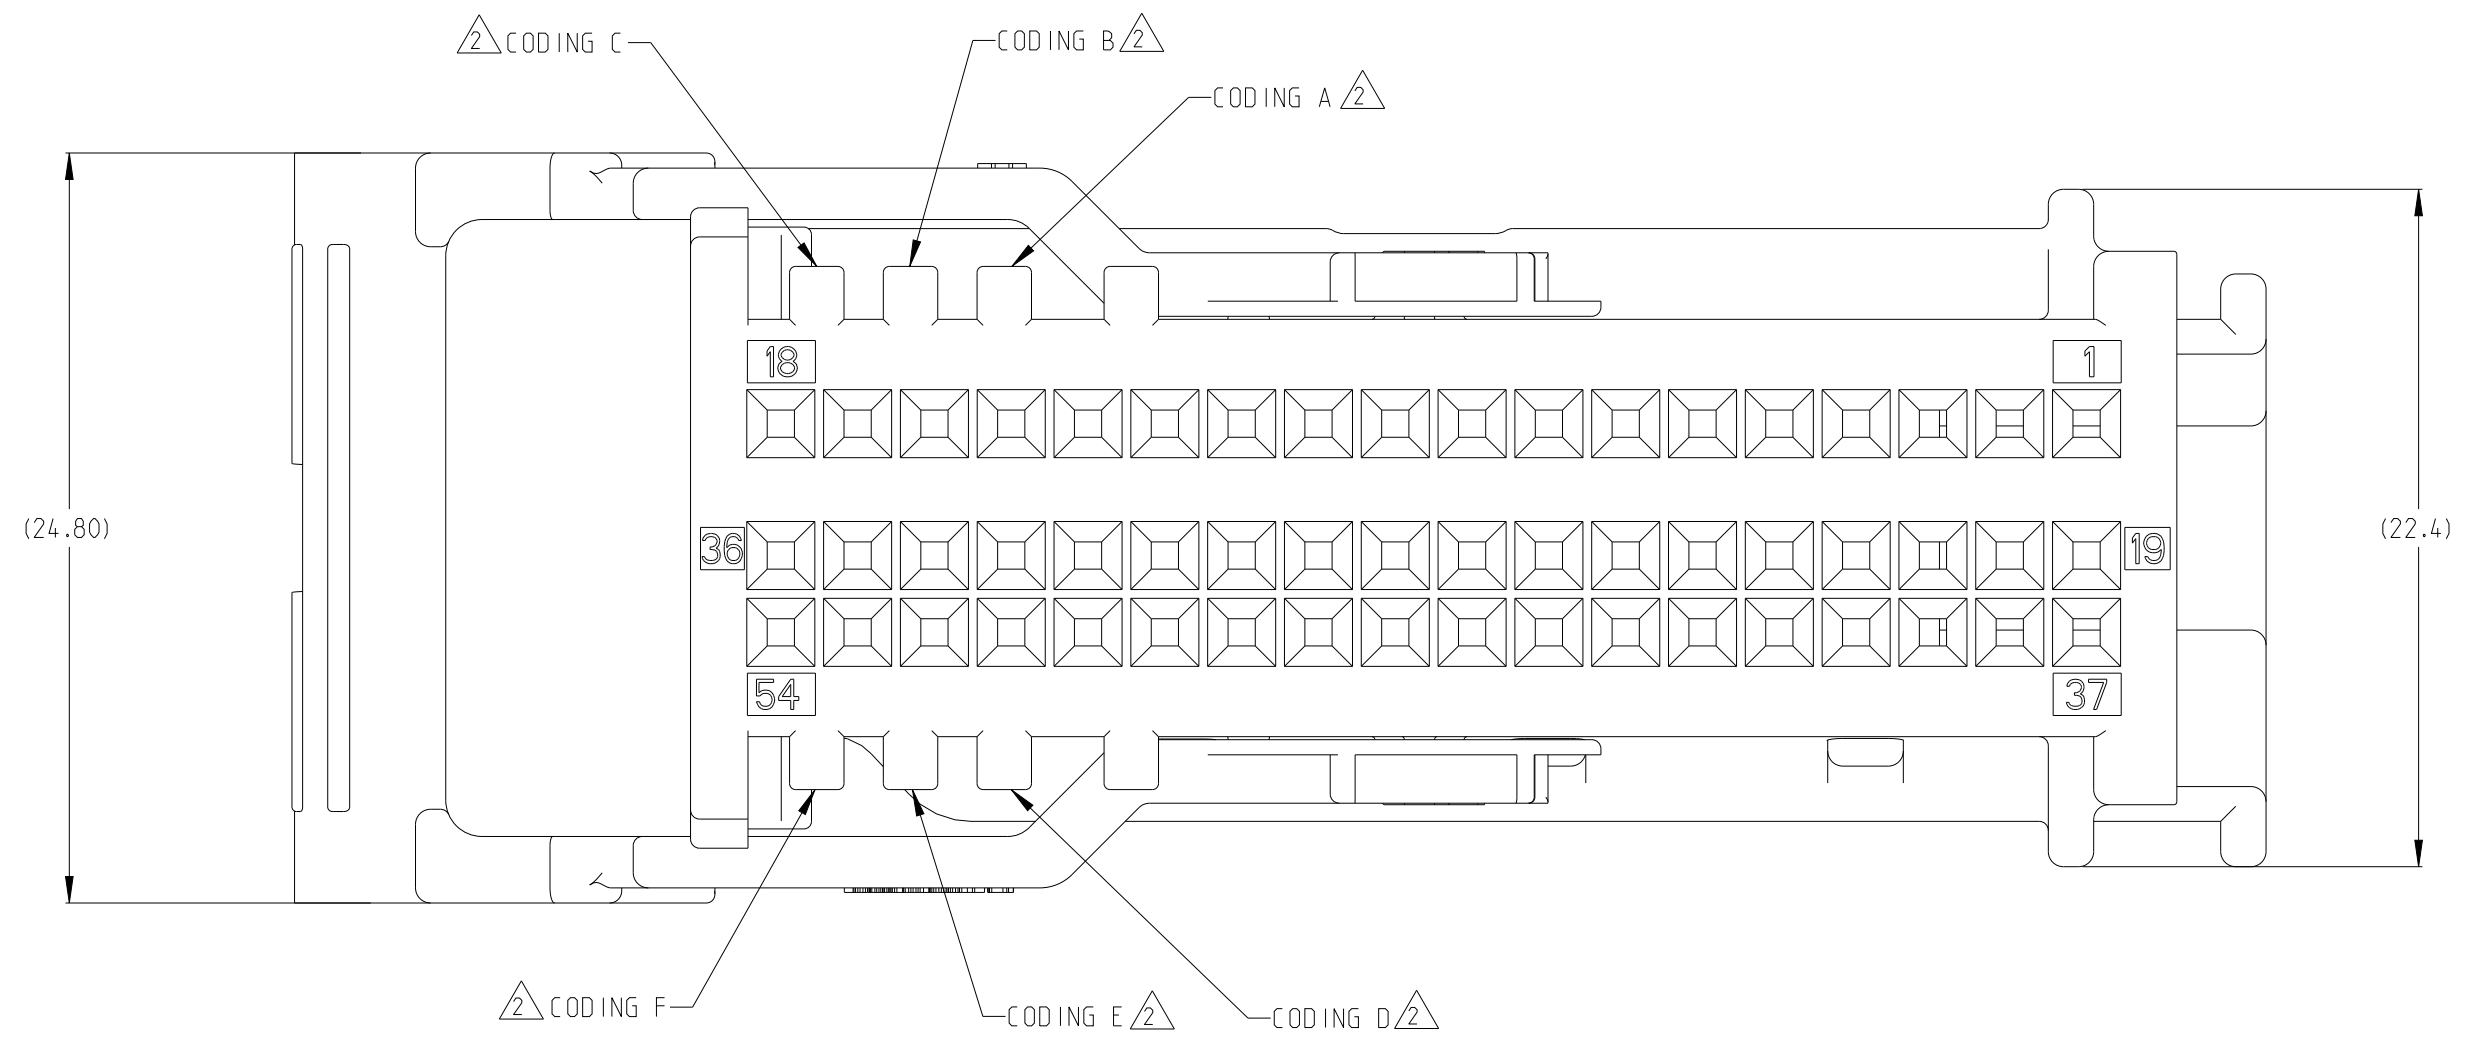
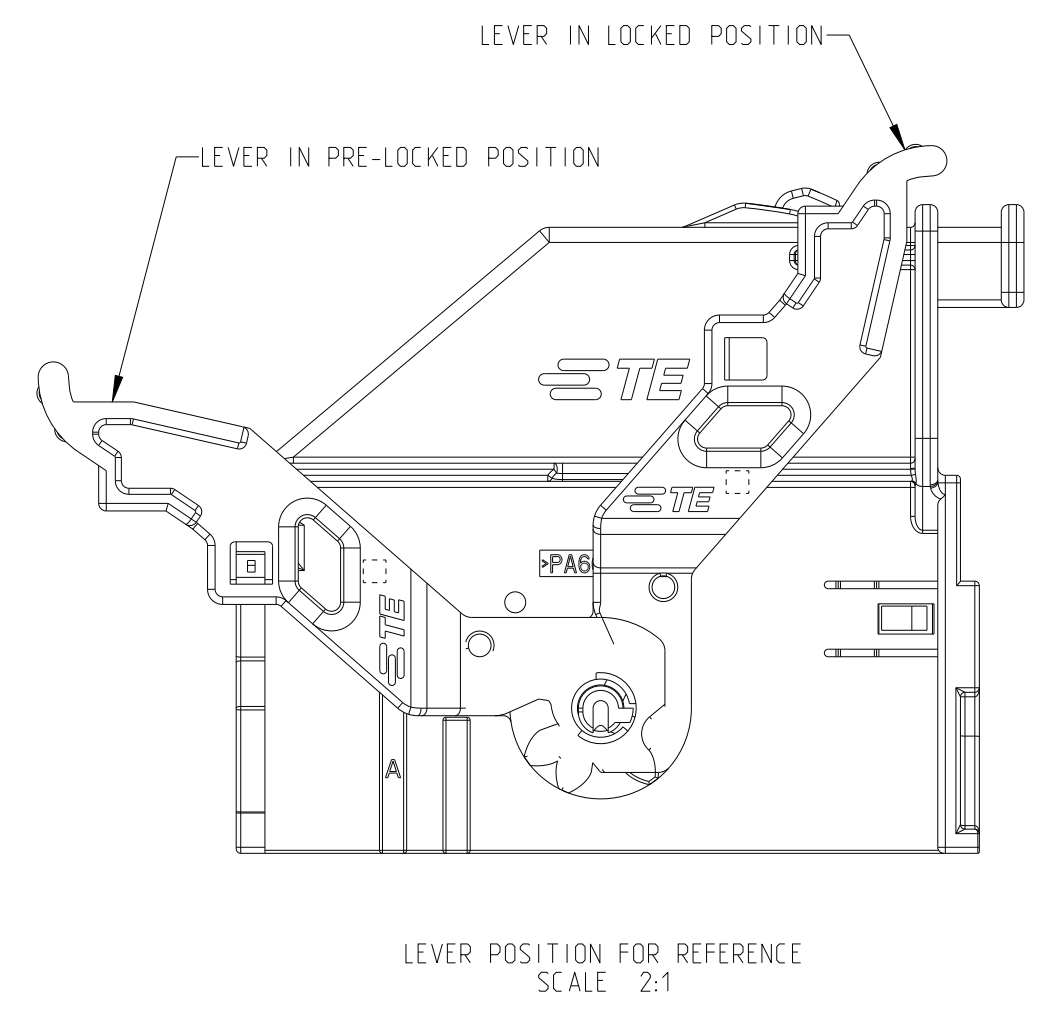
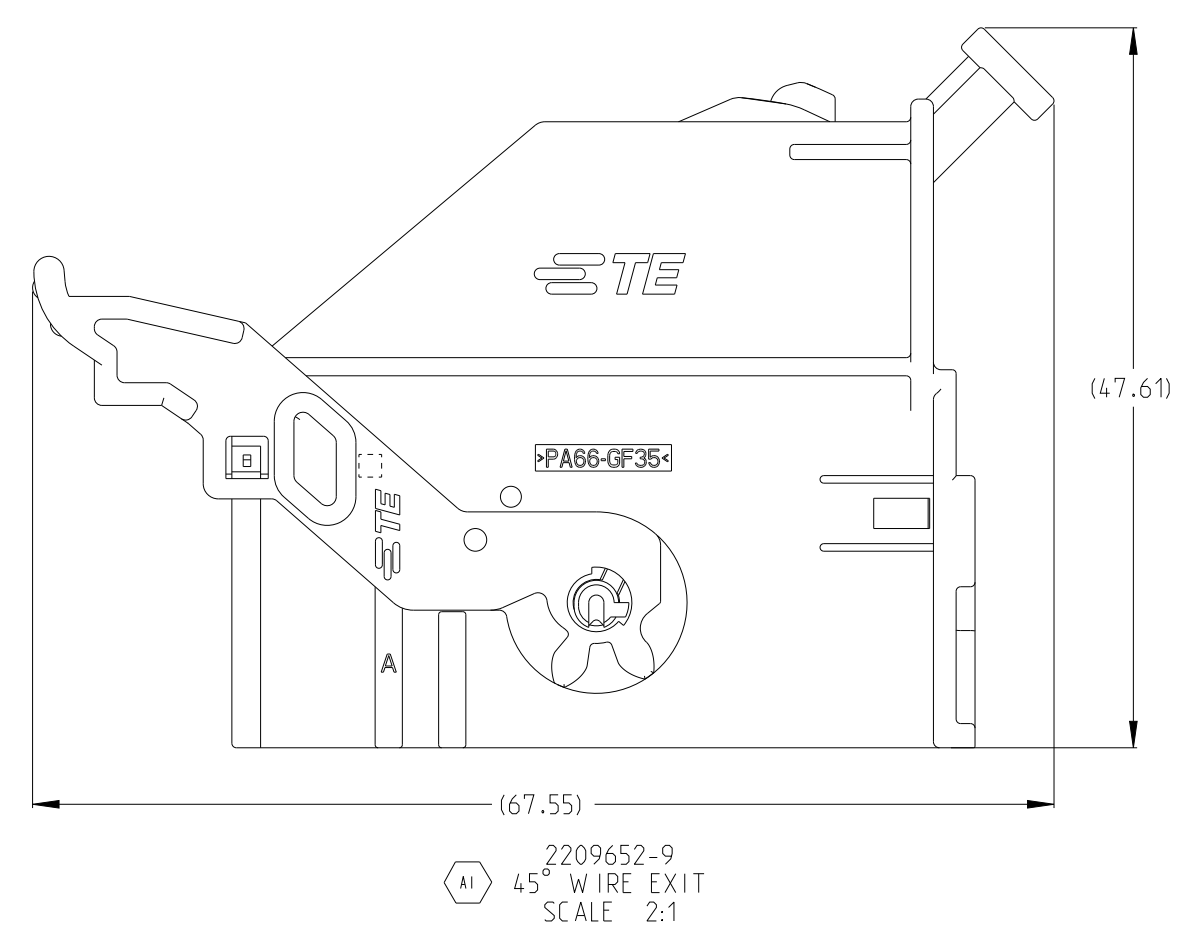
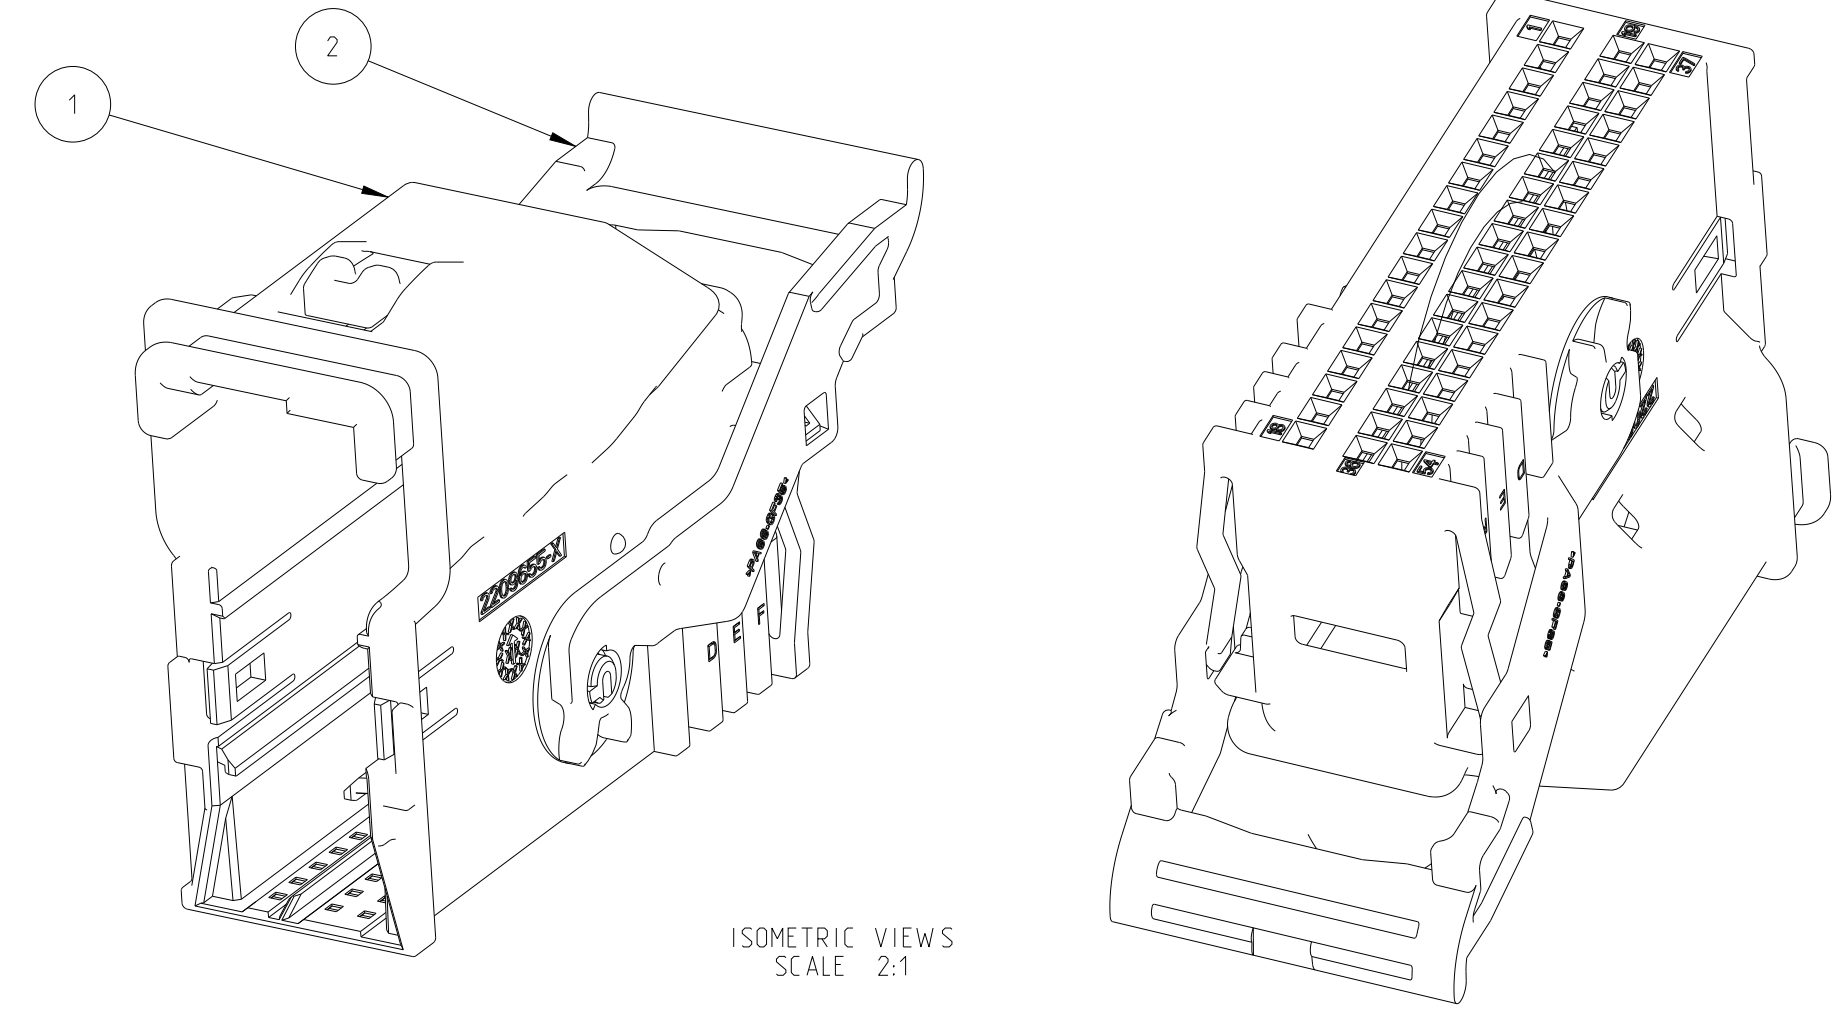


LOC		DIST		REVISIONS			
P	LTN	DESCRIPTION	DATE	DMN	APVD		
A		RELEASED	13MAR2013	C.C.	J.Y.		
A1		ADD 45° WIRE EXIT	12NOV2021	C.C.	J.Z.		

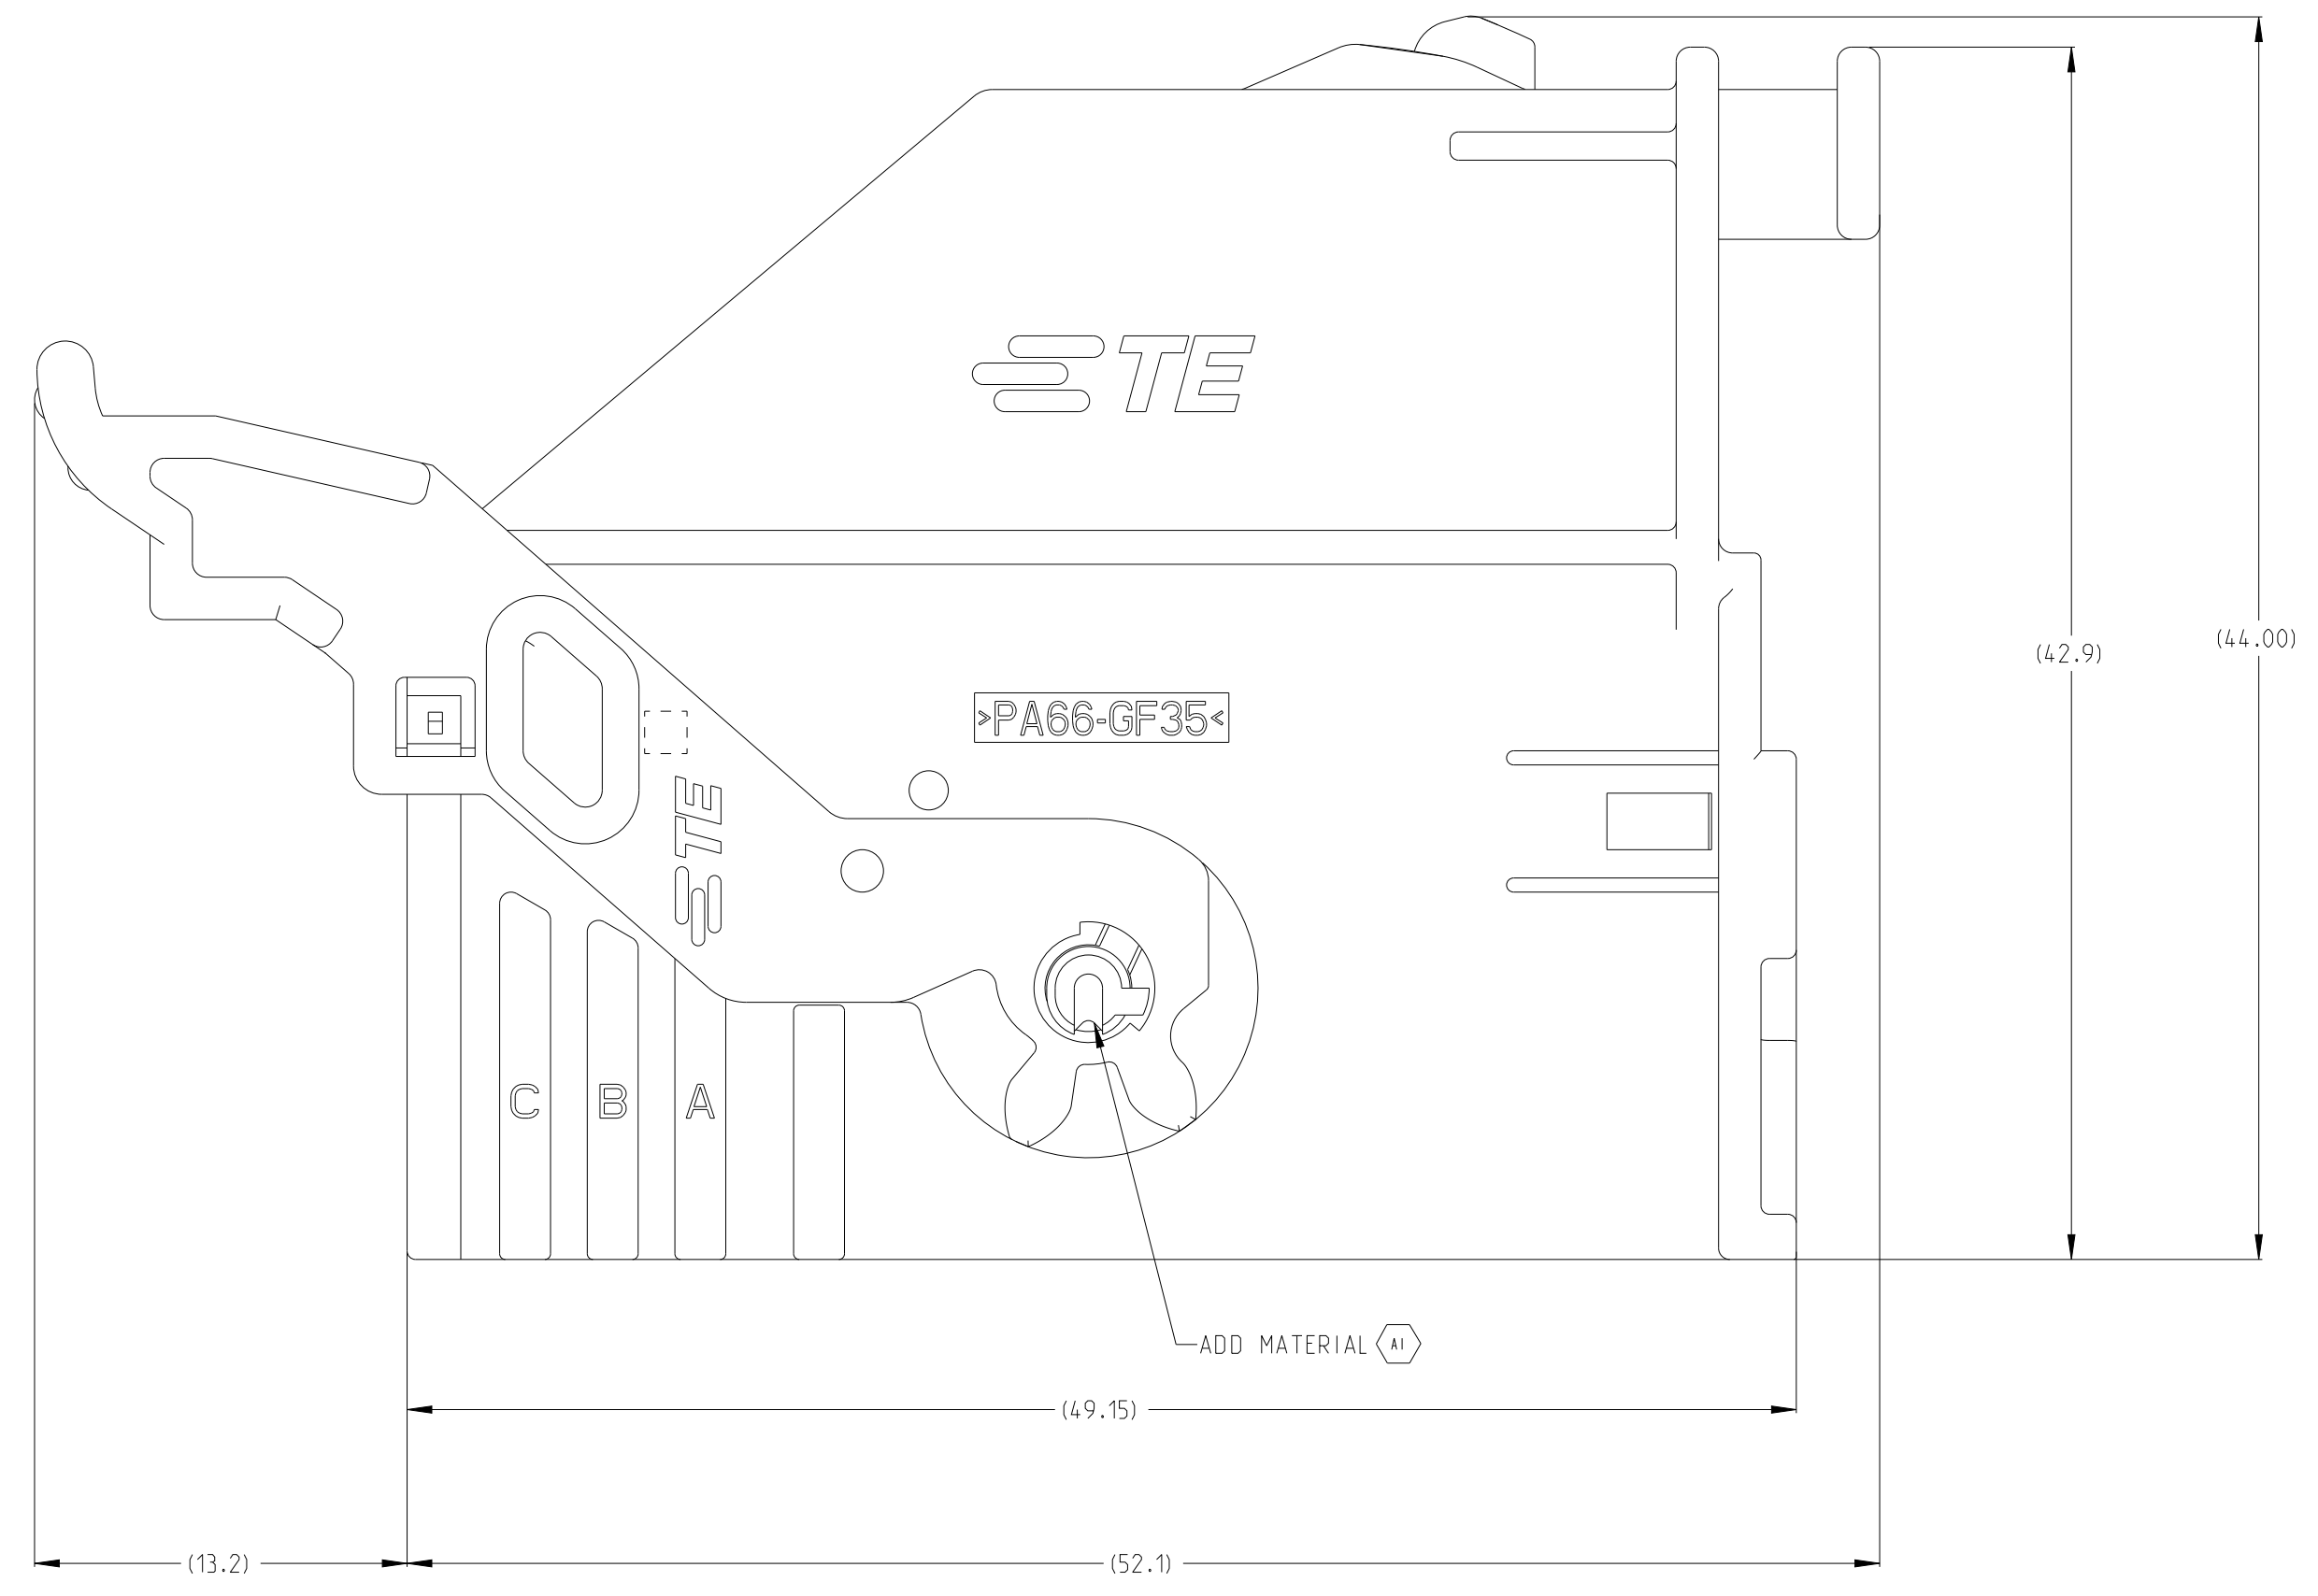

- NOTES:
 1) WIRE COVER ASSEMBLY ACCEPTS CARRIER PART NUMBER 2098971-1 AND 2098972-1. CARRIER MUST BE ORDERED SEPARATELY AND BE ASSEMBLED TOGETHER BEFORE INSERTING INTO COVER.
 2) ALL CODINGS SHOWN FOR REFERENCE ONLY. SEE BELOW PART NUMBER TABLE FOR CODING.
 3) MAXIMUM WIRE LOADING: 54 TERMINALS CRIMPED TO 20 AWG WIRE WITH 1.60mm MAX OD INSULATION.
 4) REFER TO INSTRUCTION SHEET 408-8662 FOR PRODUCT ASSEMBLY AND DISASSEMBLY PROCEDURES.
 5) 2209652-1/-2 ARE AS LEFT VIEWS SHOWN. 2209652-9 IS 45° WIRE EXIT.

ITEM	DESCRIPTION	COLOR	MATERIAL	QUANTITY	ITEM
1	54P LEVER	GRAY	PA66-GF35	1	2
1	54P COVER 45° WIRE EXIT CODING AF	YELLOW	PA66-GF35	1	1
	54P COVER CODING CD				
	54P COVER CODING AF				

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm 	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.5 2 PLC ±0.20 3 PLC ± 4 PLC ± ANGLES ±1° FINISH -	DWN: C. Chen CHK: A. Dang APVD: Y. Yin DATE: 13MAR2013 NAME: WIRE COVER ASSEMBLY 54 POSN, 0.64mm PLUG PRODUCT SPEC: 108-101434 APPLICATION SPEC: - SIZE: A1 CAGE CODE: 00779 DRAWING NO: C=2209652 WEIGHT: - RESTRICTED TO: - CUSTOMER DRAWING: -	TE Connectivity
-----------------------	--	---	-----------------