

Contact Dimensions: 500-Wire Hole .050x.025(1.27x0.64) - Tail LG=.260(6.60) .100 (2.54) Contact Spacing x .200 (5.08) Row Spacing



1



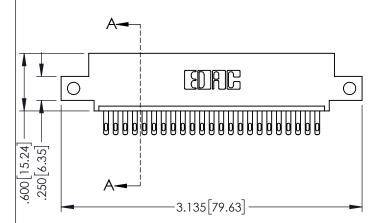

- INSULATOR MATERIAL: THERMOPLASTIC PBT BLACK, UL 94V-0
- CONTACT MATERIAL; COPPER TIN ALLOY CONTACT PLATING: GOLD ON THE MATING AREA, TIN PLATING ON THE CONTACT TAILS, NICKEL UNDERPLATE





| | DRAWN: R.STA.MONICA | DATE:MAY.16/2017 | |
|---|---------------------|------------------|-------|
| | CHECKED: | DATE: | |
| | SCALE: 1:1 | SHEET 1 | OF 2 |
| D | DRAWING NUMBER | | ISSUE |
| 5 | 345-ENG-MASTER | | 1 |

SECTION A-A ACAD REFERENCE NO. 345-ENG-MASTER

.330[8.38] CARD SLOT 160[4.06] POINT OF CONTACT











Contact Code 558

Contact Code 559

Contact Code 560

INSULATOR MATERIAL: THERMOPLASTIC POLYESTER, UL 94V-0

DAP MATERIAL AVAILABLE UPON REQUEST

CONTACT MATERIAL; COPPER ALLOY CONTACT PLATING: GOLD ON THE MATING AREA, TIN PLATING ON THE CONTACT TAILS, NICKEL UNDERPLATE

345/395 SERIES CARD EDGE CONNECTOR CONTACT CODE 555,556,558,559,560 DIMENSIONS

YOUR CONNECTION TO QUALITY & SERVICE

ACAD REFERENCE NO. 345-ENG-MASTER DATE:MAY.16/2017 DRAWN: R.STA.MONICA 1:1 SHEET 2 OF 2

345-ENG-MASTER