

<u>Contact Dimensions:</u>
500-Wire Hole .050x.025 (1.27x0.64) - Tail LG. =.260 (6.60) .125 (3.18) Contact Spacing x .250 (6.35) Row Spacing





Card Slot Accepts .054 [1.37] to .070 [1.78] Thick P.C. Board .330[8.38] Card Slot .160 [4.07] Point of Contact -

- INSULATOR MATERIAL: THERMOPLASTIC POLYESTER, UL 94V-0 CONTACT MATERIAL; COPPER, NICKEL, TIN ALLOY CA-725
- CONTACT PLATING: GOLD ON THE MATING AREA, TIN-LEAD ON THE CONTACT TAILS, NICKEL UNDERPLATE

FOR ALL OTHER SPECIFICATIONS REFER TO SHEET 4




YOUR CONNECTION TO QUALITY & SERVICE

CANADA

AGAR RESERVACE NO	0.44.54.0.44.0555					
ACAD REFERENCE NO. 346-ENG-MASTER						
DRAWN: J.LEE	J.LEE DATE: APR. 22/09					
CHECKED:	DATE:					
SCALE: 1:1	SHEET 1 OF 3					
DRAWING NUMBER	ISSUE					

346-ENG-MASTER



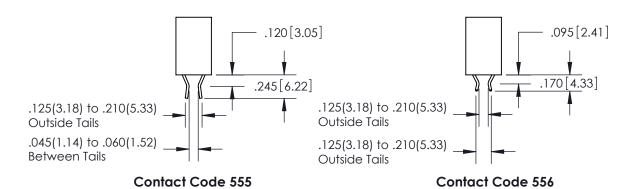

.060 [1.52] .200 [5.08] .210 [5.33] .660 [16.76]

.060 [1.52] .150 [3.81] .260 [6.6] -Outside Tails .660 [16.76] **Outside Tails**

.165 [4.19] .375 [9.54] .125(3.18) to .210(5.33) .125(3.18) to .210(5.33)

Contact Code 558

Contact Code 559

Contact Code 560

- INSULATOR MATERIAL: THERMOPLASTIC POLYESTER, UL 94V-0 CONTACT MATERIAL; COPPER, NICKEL, TIN ALLOY CA-725
- CONTACT PLATING: GOLD ON THE MATING AREA, TIN-LEAD ON THE CONTACT TAILS, NICKEL UNDERPLATE

FOR ALL OTHER SPECIFICATIONS REFER TO SHEET 3

346/396 SERIES CARD EDGE CONNECTOR CONTACT CODE 555,556,558,559,560 DIMENSIONS




346-ENG-MASTER DATE: APR. 22/09 J.LEE 1:1 SHEET 2 OF 3

346-ENG-MASTER

ISSUE NUMBE

ORIGINAL



Features

- CSA Approved and UL Recognized
- .125 (3.18) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body, .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree & Degree &
- Single or Dual Row Configurations
- Large Variety of Mounting Options, Flush or Offset Lugs
- Pre-assembled Card Guides Available
- Accepts Between Contact and In-Contact Polarizing Keys
- Automatic Wire Wrap Positioning Holes

Specifications

- Insulator Material: Thermoplastic Polyester, UL 94V-0
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1500 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Résistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +125 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

346/396 SERIES CARD EDGE CONNECTOR FEATURES AND SPECIFICATIONS		ACAD REFERENCE NO. 346-ENG-MASTER			
		DRAWN:	J.LEE	DATE: AF	PR. 22/09
		CHECKED:		DATE:	
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS	SCALE:	1:1	SHEET :	3 OF 3
TORONTO, ONTARIO	ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE	DRAWING	NUMBER		ISSUE
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS	346	5-ENG-MASTER		1