

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

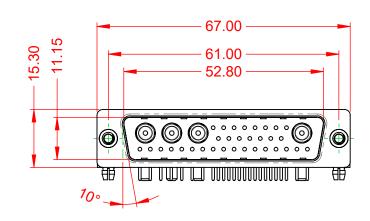




## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED

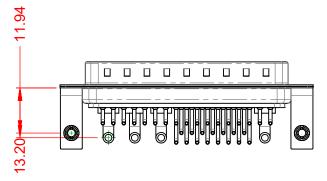

**POWER/CO-AX CONTACT RATING:** (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX. **INSULATOR RESISTANCE:** 5000MΩ min.

.X ±0.25 .XX ±0.13 .XXX ±0.05


DIELECTRIC WITHSTANDING VOLTAGE:

**OPERATING TEMPERATURE:** 

20A (CURRENT)

-55°C ~ 125°C

1000V AC rms



ſ	COMBINATION D-SUB			SW REFERENCE NO.: 629 COMBO ASSEMBLY			
				DRAWN: C.B		DATE: JAN. 01/2019	
				CHECKED:		DATE:	
		EDAC INC TORONTO, ONTARIO CANADA	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A	D. 1:1)	SHEET 1 O	F 2
				DRAWING NUMBER: 629-36W4		1640-2T3	ISSUE
	YOUR CONNECTION TO Q	UALITY & SERVICE		PART NUMBER:	629-36W4	1640-2T3	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

