



Data sheet | Item number: 859-391



Relay module; Nominal input voltage: 110 VDC; 1 changeover contact;
Railway; Red status indicator; Module width: 6 mm; 2,50 mm²; gray

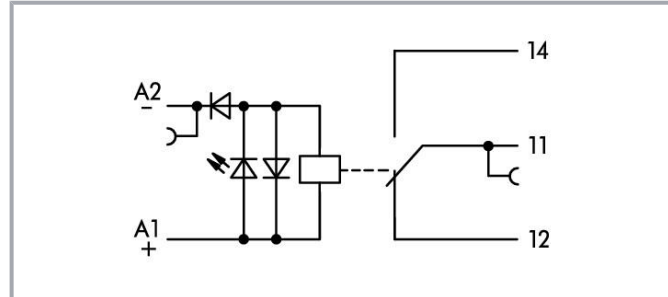

www.wago.com/859-391

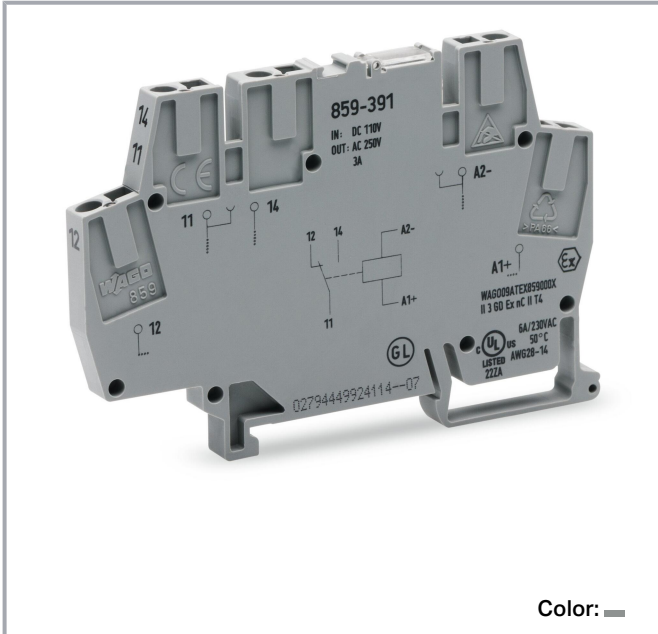


Color: —

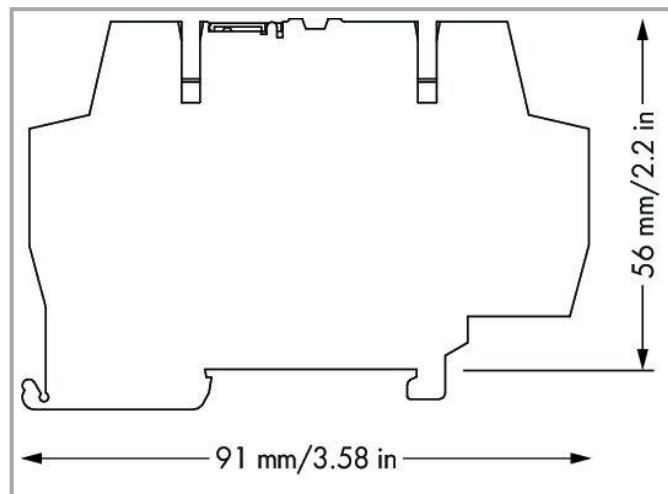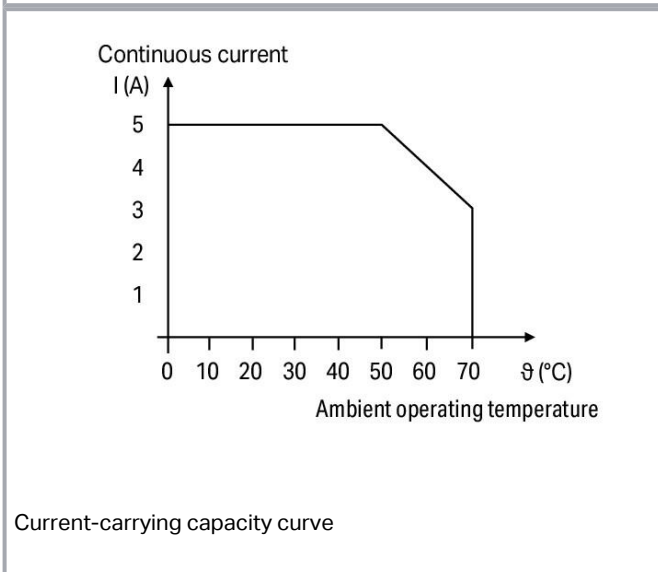

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

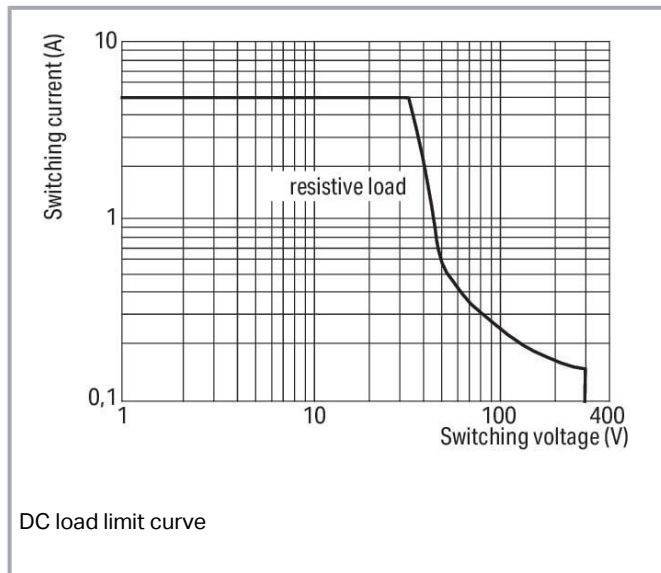

Data

Notes

Note

To protect the relay coils and contacts, inductive loads must be dampened with an effective protection circuit.

Technical data

Control Circuit

Nominal input voltage U_N	DC 110 V
Input voltage range	$\pm 30\%$
Nominal input current at U_N	3 mA

Load circuit

Number of changeover/switchover contacts	1
Contact material (relay)	AgSnO ₂
Limiting continuous current	5 A
Switching voltage (max.)	AC 250 V
Switching power (resistive) max.	AC 1250 VA; DC (see load limit curve)
Switching capacity	AC-15: 3 A / AC 250 V; DC-13: 2 A / DC 24 V

Subject to changes. Please also observe the further product documentation!



Recommended minimum load	10 V / 10 mA; 24 V / 1 mA
Pull-in time (typ.)	15 ms
Drop-out time (typ.)	25 ms
Bounce time (typ.)	3.5 ms
Electrical life (NO; resistive load; 23 °C)	50 x 10 ³ switching operations
Mechanical life	5 x 10 ⁶ switching operations
Switching frequency with/without load (max.)	6 min ⁻¹ / 180 min ⁻¹

Signaling

Status indicator	Red LED
------------------	---------

Safety and protection

Rated voltage	300 V
Rated surge voltage	4 kV
Overvoltage category	III
Pollution degree	2
Dielectric strength (control/load circuit) (AC, 1 min)	4 kVrms
Dielectric strength (open contact) (AC, 1 min)	1 kVrms
Insulation type (control/load circuit)	Reinforced insulation (safe isolation)
Insulation type (adjacent devices)	Reinforced insulation (safe isolation)
Protection type	IP20; in connected state or when using 859-525 end plate

Connection data

Connection technology	CAGE CLAMP®
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Fine-stranded conductor	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Fine-stranded conductor; with insulated ferrule	0.08 ... 1.5 mm ² / 28 ... 16 AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches

Physical data

Width	6 mm / 0.236 inches
Height	91 mm / 3.583 inches
Depth from upper-edge of DIN-rail	56 mm / 2.205 inches

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.

Mechanical data

Mounting type	DIN-35 rail
Mounting position	Horizontal (standing/lying); vertical

Material Data

Color	gray
Fire load	0.457 MJ
Weight	22.3 g

Environmental requirements

Ambient temperature (operation at U_N)	-40 ... +70 °C
Ambient temperature (storage)	-40 ... +70 °C
Processing temperature	-25 ... +50 °C
Temperature range of connection cable	$\geq (T_{\text{ambient}} + 20 \text{ K})$
Relative humidity	5 ... 95 % (no condensation permissible)
Operating altitude (max.)	2000 m

Standards and specifications

Standards/specifications	EN 61010-2-201 EN 61810-1 EN 61373 UL 508 DNV
--------------------------	---

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-37-16-01
eCl@ss 9.0	27-37-16-01
ETIM 8.0	EC001437
ETIM 7.0	EC001437
PU (SPU)	10 pcs
Packaging type	box
Country of origin	CN
GTIN	4055143604253
Customs tariff number	85364900990


Subject to changes. Please also observe the further product documentation!

Environmental Product Compliance


CAS-No.	7439-92-1 79-94-7
REACH Candidate List Substance	2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	6d12ed06-fbf3-46a1-a654-630e8d49ec3a
SCIP notification number (Belgium)	204a505a-779b-47fd-bb86-ece19e28e6f6
SCIP notification number (Bulgaria)	52694fa5-7fde-4b35-8106-adf982eee3cc
SCIP notification number (Czech Republic)	25a17a55-10db-48ed-bd57-1f856ac46747
SCIP notification number (Denmark)	50126113-d1c1-4fed-8ff4-c751f9813eff
SCIP notification number (Finland)	e6292971-97d1-4062-99e2-1f8d520ffe86
SCIP notification number (France)	dc7b4162-3d72-47f2-a6ca-a778864afaac
SCIP notification number (Germany)	bdf824c4-0b3f-474f-b497-66278509560c
SCIP notification number (Hungary)	58a34e58-8285-4ce7-aca7-c5dd0d887a32
SCIP notification number (Italy)	f6ec7b34-e646-4dac-82b3-bc9d30a8a37e
SCIP notification number (Netherlands)	a5a1c421-7f99-42f1-971a-c6ab6f7bbcaa
SCIP notification number (Poland)	5dcd3f8d-80ba-40ba-ae3d-753b370f3f76
SCIP notification number (Romania)	c2238359-5fcc-49dd-b253-48ff3cbaac69
SCIP notification number (Sweden)	6b37fa18-396b-4c17-a57e-87c804f6fa3c

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCC CNEX	CNCA-C23-01	2021312304000982 (Ex ec nC IIC T4 Gc)

Declarations of conformity and manufacturer's declarations



Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Subject to changes. Please also observe the further product documentation!





UK-Declaration of Conformity
WAGO GmbH & Co. KG


Approvals for marine applications

Logo	Approval	Additional Approval Text	Certificate name
	DNV DNV Germany GmbH	DNV-CG-0339, Aug. 2021	TAA00001D1
	PRS Polski Rejestr Statków	-	TE/2186 /880590/18

Approvals for hazardous areas

Logo	Approval	Additional Approval Text	Certificate name
	CCC CNEX	CNCA-C23-01	2021312304000982 (Ex ec nC IIC T4 Gc)
	UKEx WAGO GmbH & Co. KG	EN 60079-0	UKCA_WAGO22UKEX007X_ec nC


Optional accessories

Ferrule		
Ferrule		
	Item no.: 216-223 Ferrule; Sleeve for 1 mm ² / AWG 18; insulated; electro-tin plated; red	www.wago.com/216-223
	Item no.: 216-222 Ferrule; Sleeve for 0.75 mm ² / 18 AWG; insulated; electro-tin plated; gray	www.wago.com/216-222
	Item no.: 216-221 Ferrule; Sleeve for 0.5 mm ² / 20 AWG; insulated; electro-tin plated; white	www.wago.com/216-221
	Item no.: 216-224 Ferrule; Sleeve for 1.5 mm ² / AWG 16; insulated; electro-tin plated; black	www.wago.com/216-224
	Item no.: 216-321 Ferrule; Sleeve for 0.25 mm ² / AWG 24; insulated; electro-tin plated; yellow	www.wago.com/216-321

Subject to changes. Please also observe the further product documentation!


WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

	Item no.: 216-322 Ferrule; Sleeve for 0.34 mm ² / 22 AWG; insulated; electro-tin plated; light turquoise	www.wago.com/216-322
---	---	--

Testing and measuring

Testing accessories


	Item no.: 859-500 WAGO Test pin; 1 mm Ø; 30 V AC / 60 V DC; CAT0; 1 A; 10 mm uninsulated; Test lead for soldering up to 0,5mm ²	www.wago.com/859-500
--	--	--

Marking accessories


Marking devices


	Item no.: 210-110 Fiber-tip pen	www.wago.com/210-110
--	---	--


Marker


	Item no.: 2009-145 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white	www.wago.com/2009-145
--	--	--

	Item no.: 248-501 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white	www.wago.com/248-501
--	---	--

	Item no.: 248-504 Mini-WSB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white	www.wago.com/248-504
--	---	--

	Item no.: 248-503 Mini-WSB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white	www.wago.com/248-503
---	---	--

	Item no.: 248-506 Mini-WSB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white	www.wago.com/248-506
--	---	--

	Item no.: 248-502 Mini-WSB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white	www.wago.com/248-502
--	--	--

End plate

Intermediate plate

	Item no.: 859-525 End and intermediate plate; 1 mm thick; gray	www.wago.com/859-525
--	--	--

Jumpers

Jumper

	Item no.: 859-408 Jumper; for jumper slot; 8-way; insulated; light gray	www.wago.com/859-408
--	---	--

	Item no.: 859-404/000-005 Jumper; for jumper slot; 4-way; insulated; red	www.wago.com/859-404/000-005
--	--	--

Subject to changes. Please also observe the further product documentation!



Item no.: 859-404/000-006
Jumper; for jumper slot; 4-way; insulated; blue

www.wago.com/859-404/000-006



Item no.: 859-405/000-005
Jumper; for jumper slot; 5-way; insulated; red

www.wago.com/859-405/000-005



Item no.: 859-405/000-029
Jumper; for jumper slot; 5-way; insulated; yellow

www.wago.com/859-405/000-029



Item no.: 859-405
Jumper; for jumper slot; 5-way; insulated; light gray

www.wago.com/859-405



Item no.: 859-404/000-029
Jumper; for jumper slot; 4-way; insulated; yellow

www.wago.com/859-404/000-029



Item no.: 859-406
Jumper; for jumper slot; 6-way; insulated; light gray

www.wago.com/859-406



Item no.: 859-405/000-006
Jumper; for jumper slot; 5-way; insulated; blue

www.wago.com/859-405/000-006



Item no.: 859-406/000-005
Jumper; for jumper slot; 6-way; insulated; red

www.wago.com/859-406/000-005



Item no.: 859-409/000-029
Jumper; for jumper slot; 9-way; insulated; yellow

www.wago.com/859-409/000-029



Item no.: 859-410/000-005
Jumper; for jumper slot; 10-way; insulated; red

www.wago.com/859-410/000-005




Item no.: 859-410/000-029
Jumper; for jumper slot; 10-way; insulated; yellow

www.wago.com/859-410/000-029



Item no.: 859-410
Jumper; for jumper slot; 10-way; insulated; light gray

www.wago.com/859-410

















Item no.: 859-410/000-006
Jumper; for jumper slot; 10-way; insulated; blue








www.wago.com/859-410/000-006



Subject to changes. Please also observe the further product documentation!


	<p>Item no.: 859-403/000-005 Jumper; for jumper slot; 3-way; insulated; red</p>	<p>www.wago.com/859-403/000-005</p>
	<p>Item no.: 859-402/000-029 Jumper; for jumper slot; 2-way; insulated; yellow</p>	<p>www.wago.com/859-402/000-029</p>
	<p>Item no.: 859-403/000-029 Jumper; for jumper slot; 3-way; insulated; yellow</p>	<p>www.wago.com/859-403/000-029</p>
	<p>Item no.: 859-403/000-006 Jumper; for jumper slot; 3-way; insulated; blue</p>	<p>www.wago.com/859-403/000-006</p>
	<p>Item no.: 859-408/000-005 Jumper; for jumper slot; 8-way; insulated; red</p>	<p>www.wago.com/859-408/000-005</p>
	<p>Item no.: 859-408/000-029 Jumper; for jumper slot; 8-way; insulated; yellow</p>	<p>www.wago.com/859-408/000-029</p>
	<p>Item no.: 859-409 Jumper; for jumper slot; 9-way; insulated; light gray</p>	<p>www.wago.com/859-409</p>
	<p>Item no.: 859-408/000-006 Jumper; for jumper slot; 8-way; insulated; blue</p>	<p>www.wago.com/859-408/000-006</p>
	<p>Item no.: 859-403 Jumper; for jumper slot; 3-way; insulated; light gray</p>	<p>www.wago.com/859-403</p>
	<p>Item no.: 859-409/000-005 Jumper; for jumper slot; 9-way; insulated; red</p>	<p>www.wago.com/859-409/000-005</p>
 	<p>Item no.: 859-404 Jumper; for jumper slot; 4-way; insulated; light gray</p>	<p>www.wago.com/859-404</p>
	<p>Item no.: 859-409/000-006 Jumper; for jumper slot; 9-way; insulated; blue</p>	<p>www.wago.com/859-409/000-006</p>
	<p>Item no.: 859-402/000-006 Jumper; for jumper slot; 2-way; insulated; blue</p>	<p>www.wago.com/859-402/000-006</p>
	<p>Item no.: 859-402 Jumper; for jumper slot; 2-way; insulated; light gray</p>	<p>www.wago.com/859-402</p>

Subject to changes. Please also observe the further product documentation!

	Item no.: 859-402/000-005 Jumper; for jumper slot; 2-way; insulated; red	www.wago.com/859-402/000-005
	Item no.: 859-406/000-006 Jumper; for jumper slot; 6-way; insulated; blue	www.wago.com/859-406/000-006
	Item no.: 859-406/000-029 Jumper; for jumper slot; 6-way; insulated; signal yellow	www.wago.com/859-406/000-029
	Item no.: 859-407/000-006 Jumper; for jumper slot; 7-way; insulated; blue	www.wago.com/859-407/000-006
	Item no.: 859-407/000-005 Jumper; for jumper slot; 7-way; insulated; red	www.wago.com/859-407/000-005
	Item no.: 859-407/000-029 Jumper; for jumper slot; 7-way; insulated; yellow	www.wago.com/859-407/000-029
	Item no.: 859-407 Jumper; for jumper slot; 7-way; insulated; light gray	www.wago.com/859-407

Tool

Operating tool

	Item no.: 210-720 Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured	www.wago.com/210-720
--	--	--

Downloads

Documentation

Bid Text

859-391 docx - Datei	2019 Feb 20	docx 17.3 kB	Download
859-391 X81 - Datei	2019 Feb 19	xml 4.6 kB	Download

Instruction Leaflet

CCC Ex (Additional information) 859-***	2023 Apr 26	pdf 135.9 kB	Download
--	-------------	-----------------	----------

Subject to changes. Please also observe the further product documentation!



Relay modules, Optocoupler modules	V 2.0.0 2022 Jan 19	pdf 2.1 MB	Download
------------------------------------	------------------------	---------------	----------

Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
---	------------------------	---------------	----------

CAD/CAE-Data

CAE data

EPLAN Data Portal 859-391	URL	Download
---------------------------	-----	----------

WSCAD Universe 859-391	URL	Download
------------------------	-----	----------

ZUKEN Portal 859-391	URL	Download
----------------------	-----	----------

CAD data

2D/3D Models 859-391	URL	Download
----------------------	-----	----------

Environmental Product Compliance

Compliance Search


Environmental Product Compliance 859-391	URL	Download
--	-----	----------

Relay module; Nominal input voltage: 110 VDC; 1 changeover contact; Railway; Red status indicator; Module width: 6 mm; 2,50 mm²; gray

Installation Notes


Conductor termination

Subject to changes. Please also observe the further product documentation!

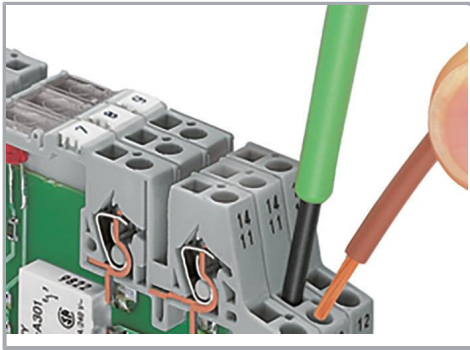

Conductor termination

Commoning

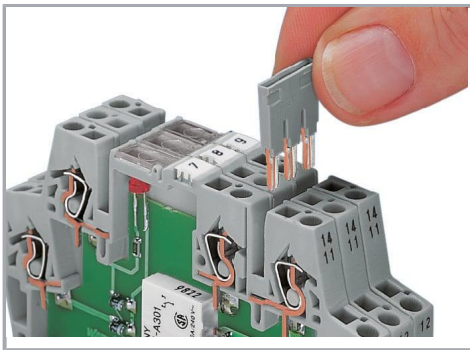

Easy commoning using adjacent jumpers

Marking



Marking via Mini-WSB Quick Marking System

Subject to changes. Please also observe the further product documentation!