

T	G	П	m	O



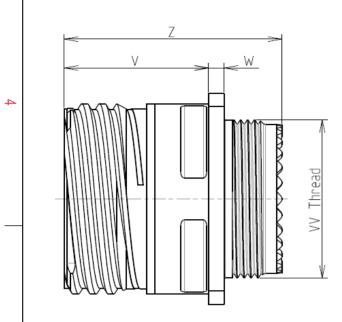

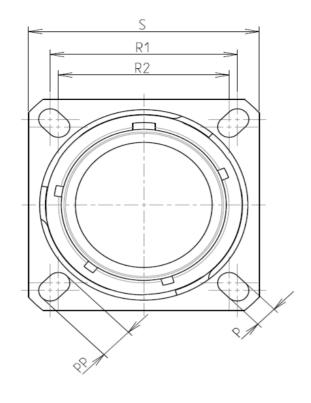

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 19

Н


ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium
-Shell Plating	: Black Zinc Nickel
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minim
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	: -65℃ to +175℃

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	29.36			
R2	26.97			
S	36.5±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M28x1-6g			

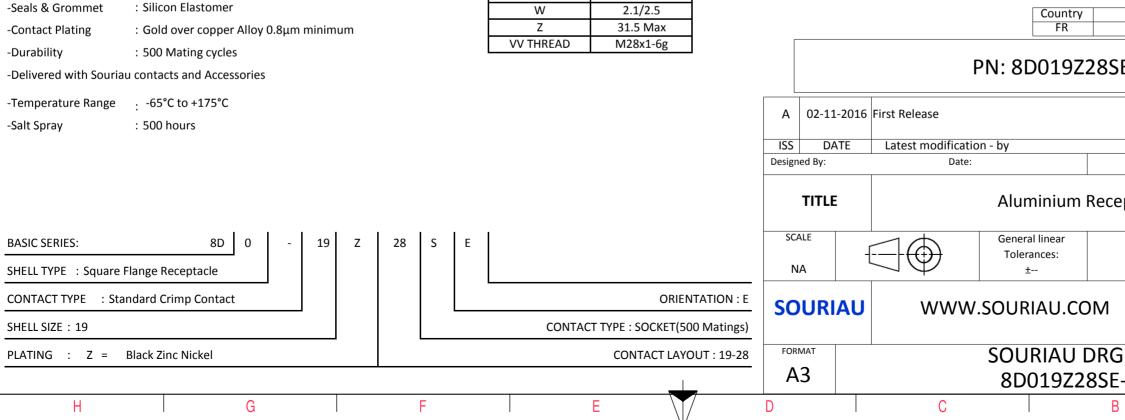

~		_					
0		Ξ	A		1		
					4		
LAY	YOUT SHOWN AS EXA	MPLE			3		
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed							
PN: 8D019Z28SE							
First Release							
Latest modificatio Date:	n - by		CUSTOMER DRAWING	MOD N°			
Aluminium Receptacle 8D series							
$\exists \bigoplus$	General linear Tolerances: ±		NPRDS / PROJECT 859		1		
WWW.SOURIAU.COM This document is the property of SOURIAU SOURIAU it must not be reproduced or communicated without permission							
SOURIAU DRG N° SHEET 8D019Z28SE-C 1/2							
С		B	A	_,_	J		

	Т	۵	г	m		0	
		Contact Layout					Panel Cutout
4					Λ	SQUARE FLANGE RECEPTACLE REAR MOUNTING R1	TYPE 0)
	Contact position Contact k X-avis ID ID (mm) A +.066 (1.68) B +.1189 (4.80)	× 0 0 ⁺			¥ 22 –		
ω	C + 286 (7 26) D + 345 (8.76) E + 357 (9.07) F + 321 (8.15) G + 242 (6.15) H + 130 (3.30) J + 0000 (0.00) K - 130 (3.30) L - 242 (6.15) M - 3321 (8.15) N - 357 (9.07) P - 345 (8.76)	$\begin{array}{rrrrrrrrrrrrrrrrrrrrrrrrrrrrrrrrrrrr$					Dim ØA ØAA R1 ØT
	F					SOURIAU shall	not be liable for any
N						due to a use the Specifications	of the Products whi issued by either of ional recommendation Country FR
							PN: 8D019Z
					A 02-11-20 ISS DATE Designed By:	16 First Release Latest modificatio Date:	יח - by
					TITLE		Aluminium
-					SCALE NA	$\bigcirc \bigcirc$	General linear Tolerances: ±
					SOURIA	U www	.SOURIAU.C
					FORMAT A3		SOURIAU 8D019Z2
l	Н	G	F	E	D	С	

