



S21 TRANS LOG MAG.
▶ 0.000 dB 0.100 dB/DIU

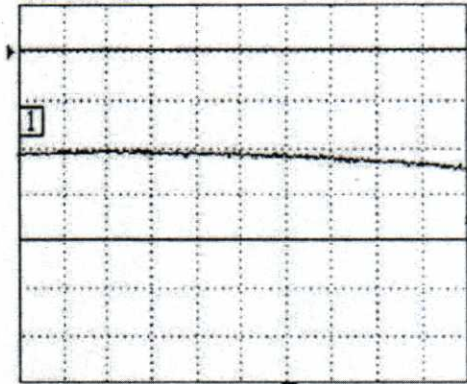


0.700000000 GHz 0.800000000

S11 REFL LOG MAG.
▶ 0.000 dB 5.000 dB/DIU

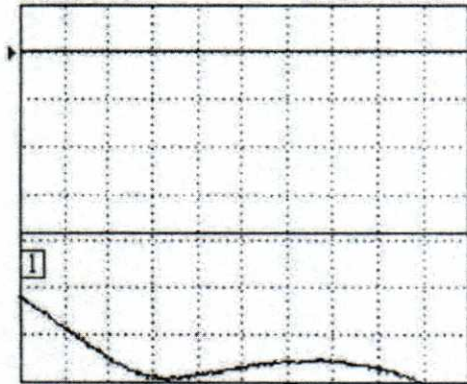


0.700000000 GHz 0.800000000

S22 REFL LOG MAG.
▶ 0.000 dB 5.000 dB/DIU

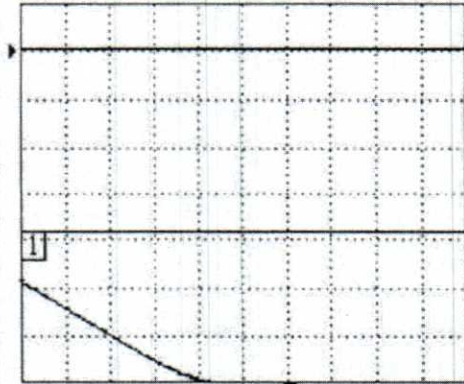

0.700000000 GHz 0.800000000

S12 TRANS LOG MAG.
▶ 0.000 dB 5.000 dB/DIU

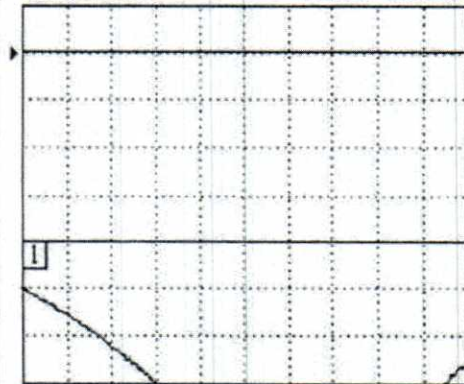

0.700000000 GHz 0.800000000

CH 4 - S12
0.0000 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 1
0.700000000 GHz
-25.072 dB

▶ MARKER TO MAX
MARKER TO MIN

MARKER READOUT
FUNCTIONS

D3C0780S Circulator

Isolation: 20 dB Min

Insertion Loss: 0.40 dB Max

VSWR: 1.25:1 Max

SMA-F Connectors