



Mechanical Dimensions: Inches [mm]

Tolerances ± 0.012 [0.3] Unless Otherwise Specified

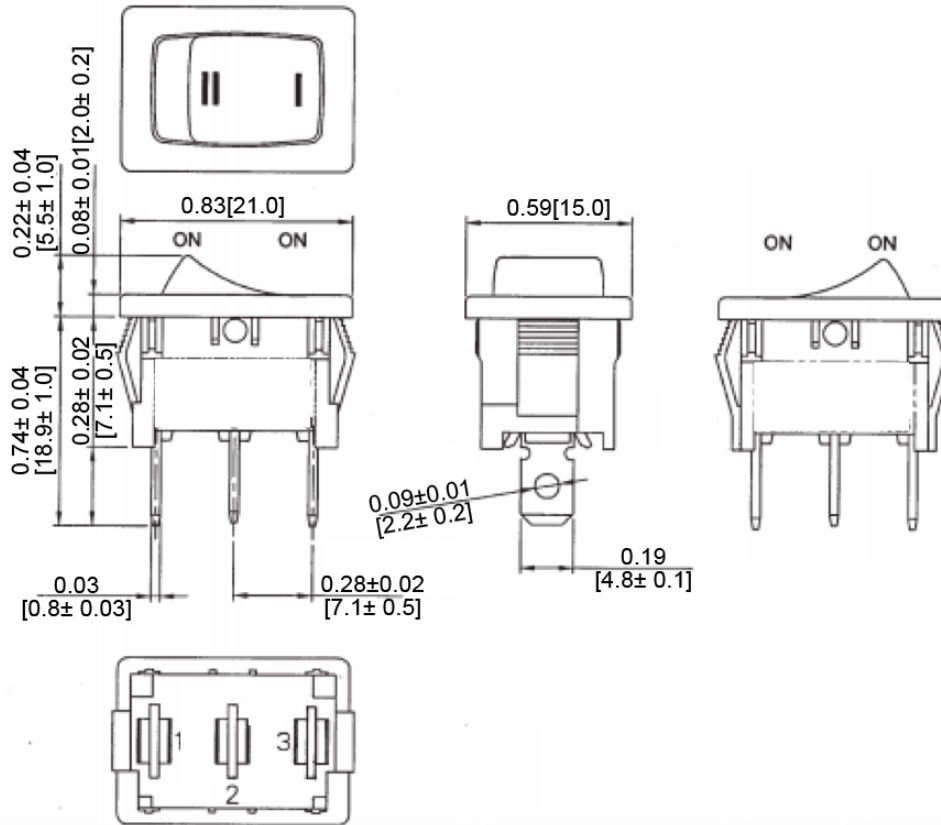


Mounting Hole



Thickness	X	Y
0.03~0.05 [0.75~1.25]	0.756+0.004 [19.2+0.1]	0.51+0.004 [13.0+0.1]
0.05~0.08 [1.25~2.0]	0.764+0.004 [19.4+0.1]	0.51+0.004 [13.0+0.1]
0.08~0.012 [2.0~3.0]	0.780+0.004 [19.8~0.1]	0.51+0.004 [13.0+0.1]

Circuit Diagram

3P SPDT ON-ON



Electrical Specifications

Rating 20A12VDC, 10A 24VDC

Contact Resistance 50m ohm Max

Insulation Strength DC 500V 100M ohm Min.

Dielectric Strength AC 1500V 1 minute

Operation Temperature -25°C~ 85°C

Material Specifications

Frame Black, Nylon 66

Actuator Black, Nylon 66

Terminal Silverplated, copperalloy

Rev	Date of issue	Revision Notes	Designed	Approved
A	02-25-2020	Initial Drawing	RC	OF