


Large Incandescent Indicators

FOR MOUNTING IN 1" CLEARANCE HOLE
FOR 24 TO 250V OPERATION



S-6
DOUBLE CONTACT
BAYONET BASE

See lamp ratings
on page K.


Recognized under the component
program of Underwriters'
Laboratories Inc.

75W., 125V.



These series indicator lights meet or exceed requirements of MIL-L-3661.

For materials and finishes of products in this group, see page 29D.

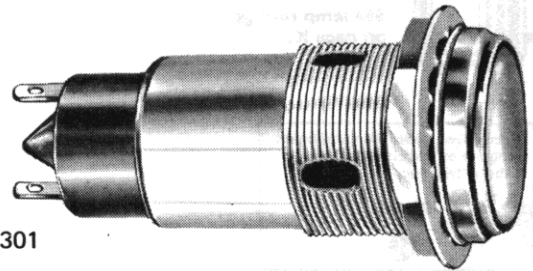

31-3402-0211-301
Flat lens

WITH FRICTION-FIT LENS CAPS

fixed solder	fixed screw
<p>1/16 PANEL (REF.) 0.030 X 1 1/8 O.D. FLANGE 0.025 ± .006 X 1 3/8 ± .020 O.D. INTERNAL TOOTH LOCKWASHER 1/8 X 1 1/8 ACROSS FLATS HEX. NUT. 1-27 NS THD. MOUNTING BUSHING. PROJECTION BACK OF PANEL 3/32 DIA. 2 1/2 MAX.</p>	
31-3402-01-101	31-3202-01-101

31 SERIES

BASE PART NUMBERS

CAP PART NUMBERS	COMPLETE ASSEMBLY PART NUMBERS
<p>CONVEX 31-0111-300 back frosted 31-0131-300 unfrosted</p>	<p>31-3402-0111-301 31-3402-0131-301</p> <p>31-3202-0111-301 31-3202-0131-301</p>
<p>FLAT 31-0211-300 back frosted 31-0231-300 unfrosted</p> <p>For legends on flat faced lens, see page P.</p>	<p>31-3402-0211-301 31-3402-0231-301</p> <p>31-3202-0211-301 31-3202-0231-301</p>
<p>FACETED 31-0431-300 unfrosted</p>	<p>31-3402-0431-301</p> <p>31-3202-0431-301</p>

Part numbers shown in gray are normally
in inventory at your Dialight Distributor.

Part numbers listed in this catalog designate products with RED lens.
For ordering lens colors other than red, consult chart on page 2D.