



.XX ±0.13


.XXX ±0.05






(1)

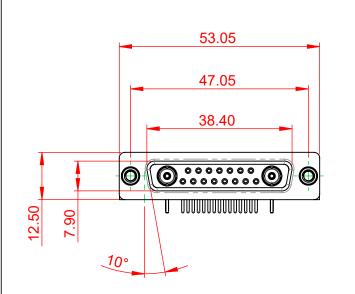




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:	THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30μ GOLD PLATED	
OPERATING TEMPERATURE:	-55°C ~ 125°C	
POWER/CO-AX CONTACT RATING: (IF PRESENT)	75Ω (IMPEDANCE)	
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.	
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.	

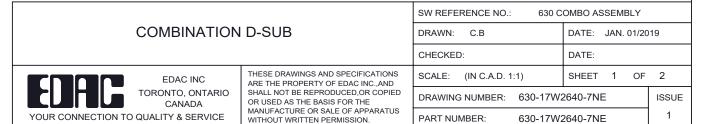





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



WITHSTANDING VOLTAGE:

1000V AC rms

